

EP7P5M10G SHOWN

**EP7 P M 10 G**

EP7 SERIES

P - PANEL-MOUNT CONNECTOR


# OF CONTACTS:  
3-5 #10

GENDER:  
M - MALE (PIN)



KIT PACKAGING OPTION:  
K - ONE UNIT / BAG  
G - PROTECTIVE EARTH, FIRST  
MATE LAST BREAK CONTACT.

CONTACT SIZE - (WIRE SIZES):  
10 - (10, 12, 14 AWG)

REFER TO "EP7C SERIES" DRAWING FOR MATING CABLE-END CONNECTORS.

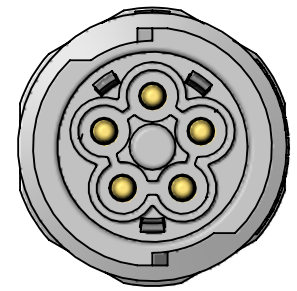


EP7P5M10G  
5-POLE FEMALE

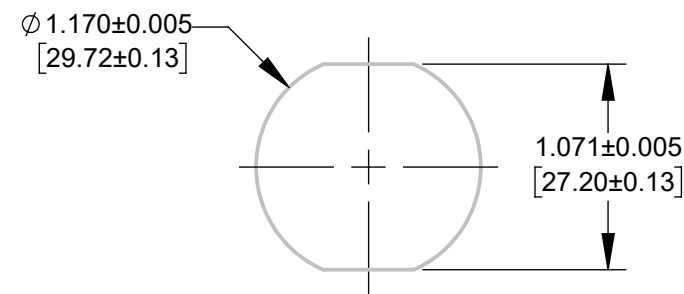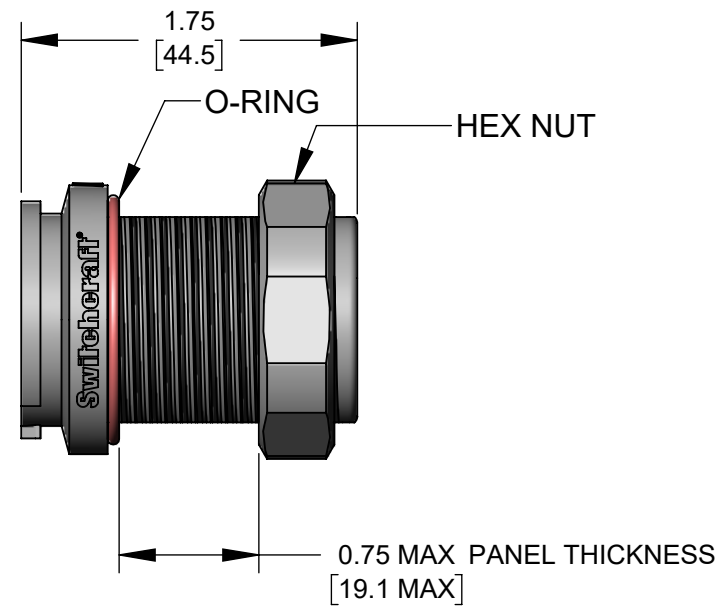


RECOMMENDED PANEL CUT-OUT

SPECIFICATIONS:	
<b>MECHANICAL</b>	
Mating / Locking Type:	Spring Loaded Automatic Latching Mechanism
Life	400 cycles minimum
Operating Forces	10 lb. [44.5 N] maximum Insertion or Withdrawal
Vibration	Mil-Std 202G Method 201A
Panel-Mount Hex Nut Torque	12 in-lb [1.36 Nm] maximum
Cable Securing System:	Treaded-on Clamp
<b>ELECTRICAL</b>	
Voltage Rating	600 V AC/DC
Current Rating	Refer to Current Carry Capacity Table
Insulation Resistance	1000 M $\Omega$ minimum
Contact Resistance	10 m $\Omega$ typical
<b>ENVIRONMENTAL</b>	
Temperature Limits	-40°C to +135°C (-40°F to +275°F)
Operating Temperature Range	Refer to Current Carry Capacity Table
Moisture Resistance	Mil-Std 202G Method 106G
Insulation Resistance	Mil-Std 202G Method 302 Condition B
Thermal Shock	Mil-Std 202G Method 107G
Salt Atmosphere (Corrosion)	Mil-Std 202G Method 101E Condition A
Ingress Protection Ratings	IP66, IP67, IP68 (6 ft. for 24 hours) per IEC60529, IP69K per DIN 40050-9, NEMA 250 6P
<b>MATERIAL</b>	
Outer Shell (Insulator), Hardware	Thermoplastic (PA)
Seal Grommets	Thermoplastic Elastomer (TPV)
Seal O-rings	Thermoplastic Elastomer (VMQ)
Electrical Contacts	Copper Alloy, Gold Plated
Spring, Terminal Screw	Stainless Steel

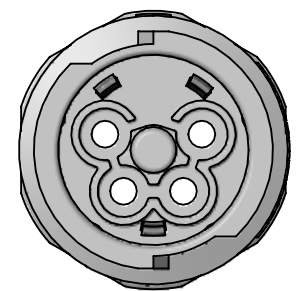

EP7P4M10G  
4-POLE FEMALE

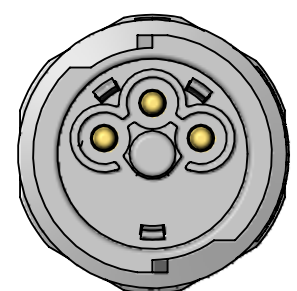


EP7P3M10G  
3-POLE FEMALE


**PRELIMINARY**

Contacts	Wire (awg)	Current Rating (A) at Operating Temperature (°C)					Minimum Test Voltage (V rms)	Voltage (V rms) tested per UL2238
		45°C max.	65°C max.	85°C max.	100°C max.	110°C max.		
3 #10	10	30	30	30	25*	20	2200	600
	12	25	25	25	20*	15		
	14	20	20	20	15*	10		
4 #10	10	30	30	30	25*	20		
	12	25	25	25	20*	15		
	14	20	20	20	15*	10		
5 #10	10	30	30	30	25*	20		
	12	25	25	25	20*	15		
	14	20	20	20	15*	10		


\*Temperature Rise does not exceed 30°C when tested according to UL2238. All other recommended current ratings are based on the Relative Thermal Index of the insulating material.



3-POLE



4-POLE



5-POLE

INSERTS (CONTACT CARRIERS) REAR VIEW SHOWN FOR CLARITY  
S1-S5: SOCKET CONTACT POSITIONS, COUNTED CLOCKWISE  
P1-P5: PIN CONTACT POSITIONS, COUNTED COUNTERCLOCKWISE  
PE: PROTECTIVE EARTH, FIRST MATE LAST BREAK CONTACT


NOTES:

1. ALL DIMENSIONS FOR REFERENCE ONLY.
2. CONNECTORS PROVIDED UNASSEMBLED, SHOWN ASSEMBLED.
3. WARNING: DO NOT DISCONNECT THESE CONNECTORS UNDER LOAD.
4. THESE PRODUCTS ARE RoHS COMPLIANT.

**CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
1. ALL DIMENSIONS IN INCHES [mm]					SIZE	WIDTH	MULT	LBS/M	TEMPER	
- TWO PLACE DECIMALS $\pm 0.02$ [0.5]					FINISH		MATERIAL			
- THREE PLACE DECIMALS $\pm 0.005$ [0.13]					SPEC No.		SPEC No.			
					FIRST USED ON		SCALE			
							1:1			
					DATE DRAWN	BY	CHKD	APVD		
					2/3/26	PNK	2/3/26	*		
					NAME				PART No.	REV
					MALE PANEL-MOUNT, FMLB EP7P SERIES CONNECTORS				EP7P_G SERIES	0A
REVISIONS					DO NOT SCALE DRAWING					
0A	P-25004-2	2/3/26	PNK	*	SolidWorks CAD File					


STEP 1

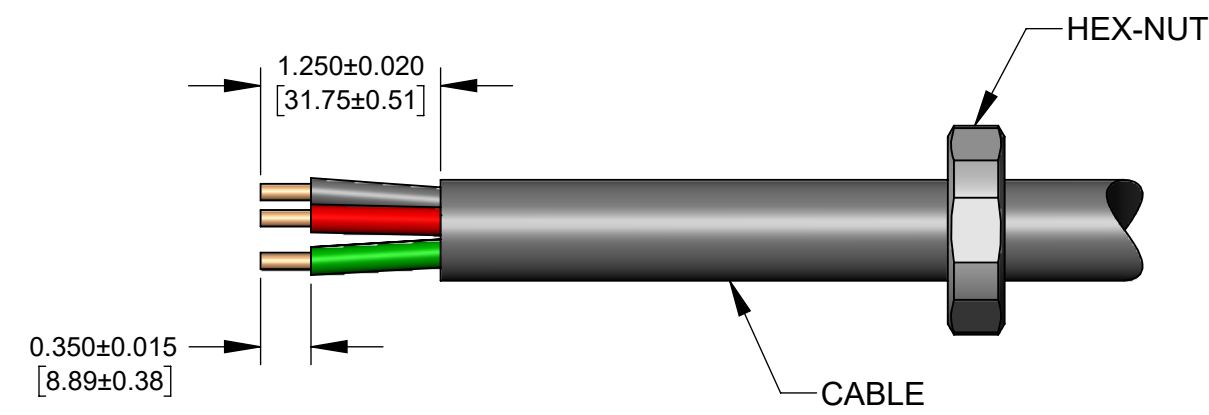

FEED THE FREE END OF CABLE THROUGH THE HEX-NUT.  
STRIP THE CABLE JACKET AND THE CONDUCTORS AS SHOWN.

STEP 2

5-POSITION PINS SHOWN

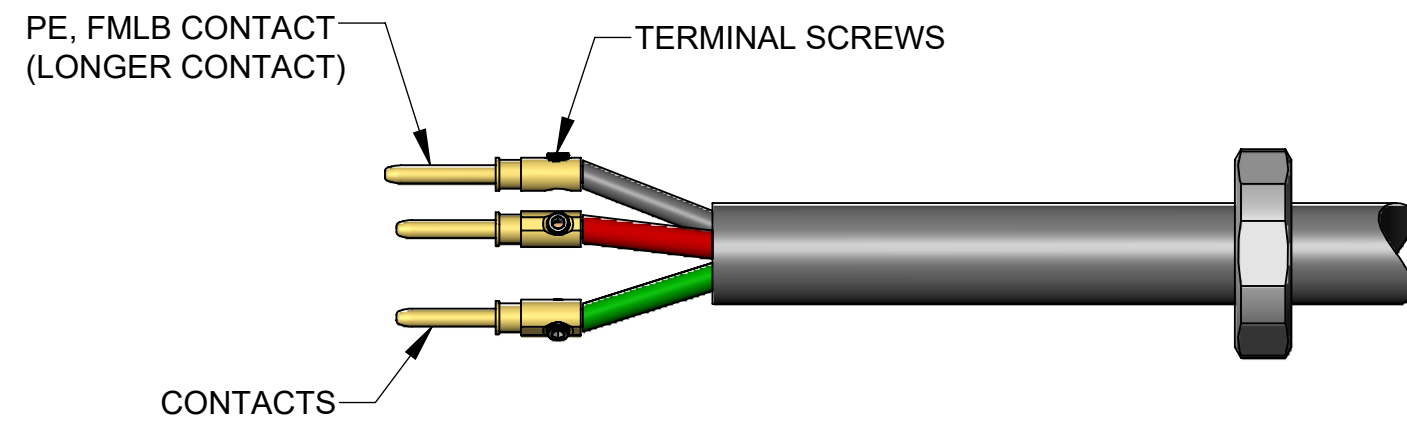

INSERT EACH STRIPPED CONDUCTOR INTO BARREL OF EACH CONTACT AND TIGHTEN TERMINAL SCREW USING A HEX DRIVE SIZE 2. NOTE: THE PE CONTACT SHOULD BE WIRED TO THE DESIGNATED PE CONDUCTOR.

NOTE: THE PRE-ASSEMBLED TERMINAL SCREW ONTO CONTACT MAY HAVE TO BE BACKED OFF A LITTLE IN ORDER TO FIT THE 10 AWG WIRE IN THE BARREL WELL WITH EASE.

STEP 3


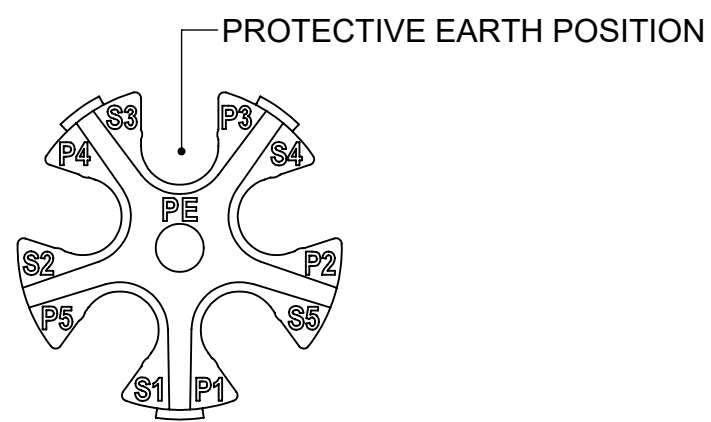


FIG A: INSERT (CONTACT CARRIER) REAR VIEW  
P1-P5: PIN CONTACT POSITIONS, COUNTED COUNTERCLOCKWISE

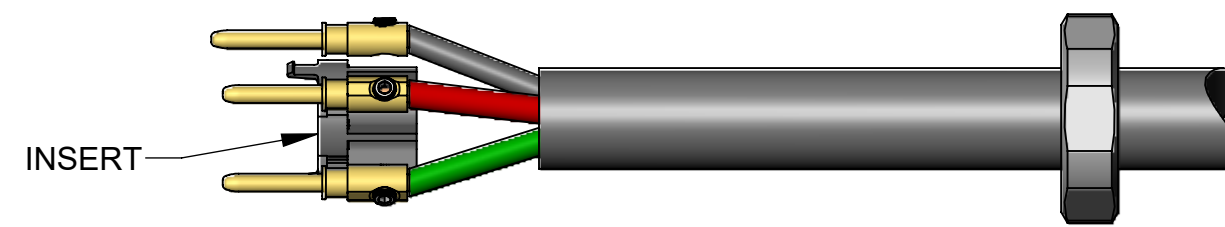

SPREAD THE WIRED CONTACTS APART RADIALLY AND POSITION INSERT BETWEEN CONTACTS PER WIRING DIAGRAM SHOWN IN FIG A.

SNAP EACH CONTACT IN THE APPROPRIATE INSERT POCKET BY PUSHING FROM THE SIDE.

STEP 4


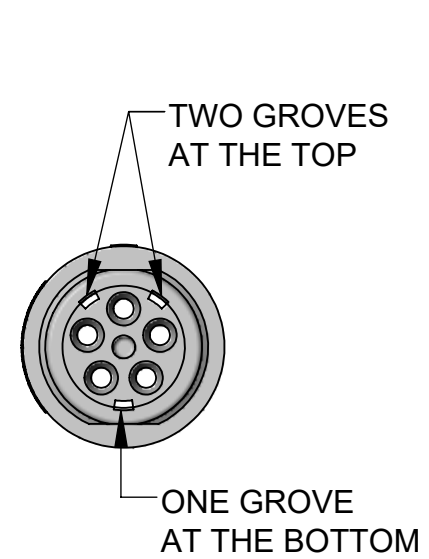



FIG B: SHELL ASSEMBLY REAR VIEW

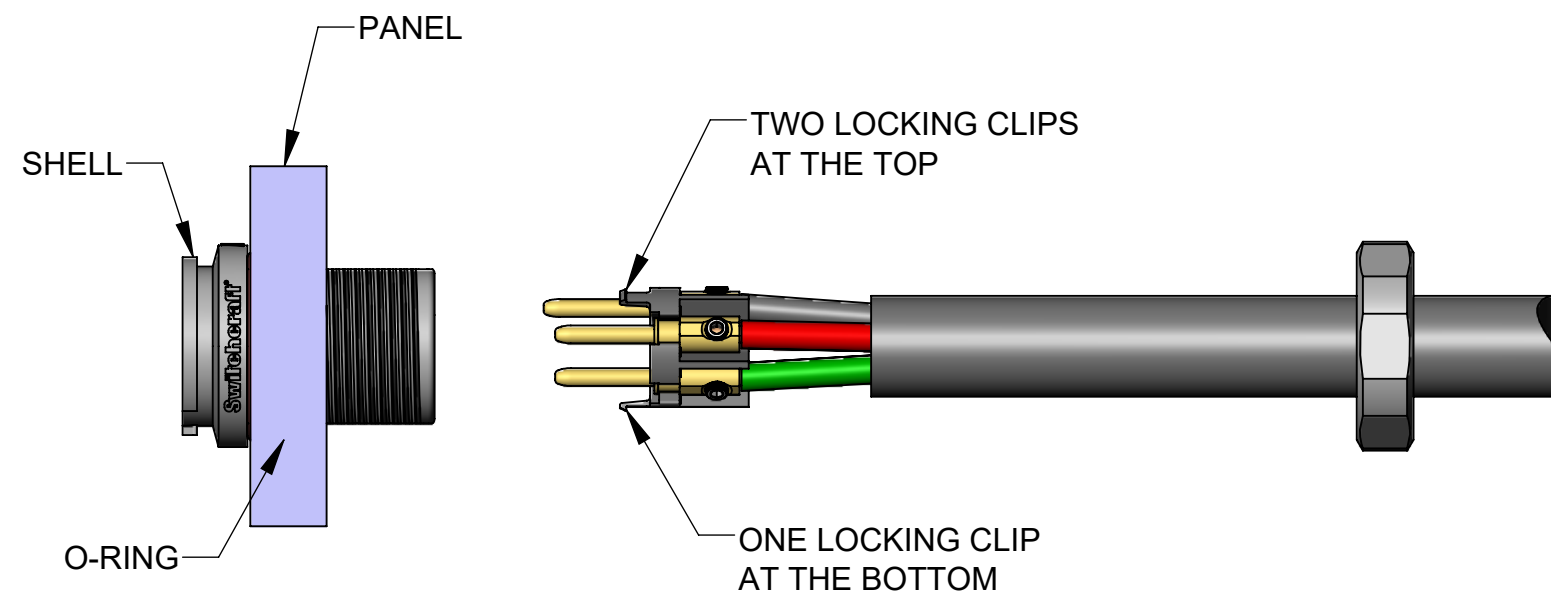

INSERT SHELL/O-RING INTO PANEL AS SHOWN.

ALIGN LOCKING CLIPS OF INSERT ASSEMBLY INTO GROOVES ON THE REAR OF THE SHELL ASSEMBLY (SEE FIG B) AND PUSH FORWARD UNTIL IT LOCKS IN PLACE.

STEP 5

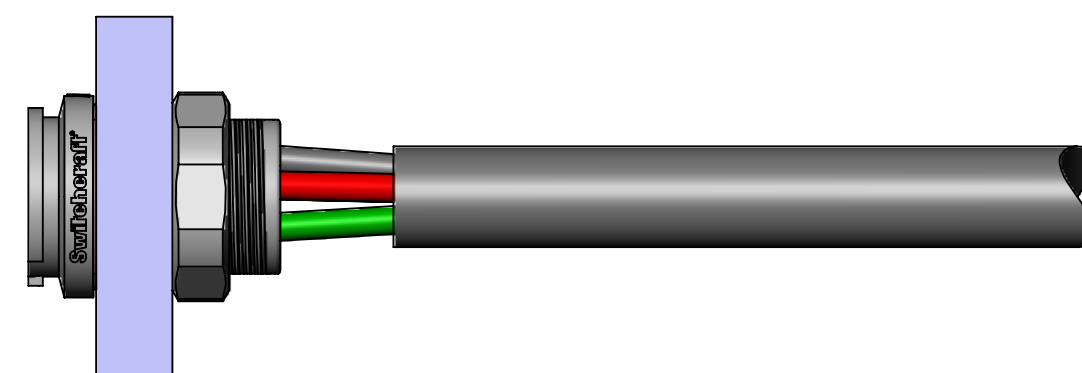

FINISHED ASSEMBLY

THREAD HEX-NUT TO THE REAR OF SHELL AND TIGHTEN AGAINST PANEL TO SECURE CONNECTOR. A 35 mm WRENCH CAN BE USED, IF NECESSARY.

CUSTOMER DRAWING

SCALE 1:1	Switchcraft®	
DATE DRAWN 2/3/26		
DRAWN BY PNK	PART No. EP7P_G SERIES	REV 0A