

AL PARTS ARE TO BE BULK PACKED. CONTACTS ARE ASSEMBLED INTO PANEL CONNECTOR WITH SOLDER CUPS FACING TOP KEY DIRECTION. $.396 \pm .005$ FLAT [10.0mm] TOP KEY **CUSTOMER PRINT FACE VIEW** 17882-4SG-300

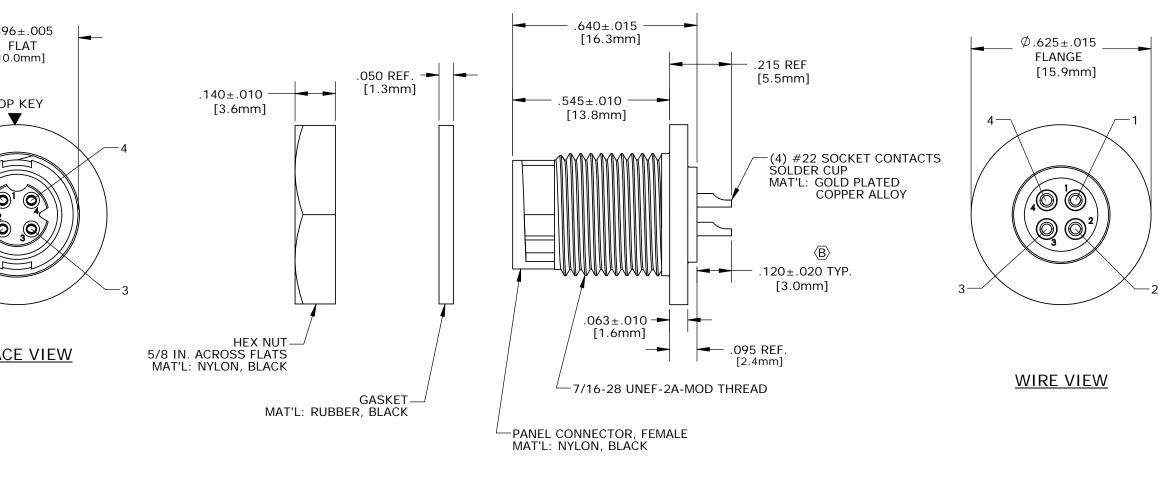



CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: ______ DATE: _____

Rohs Compliant

В	MA	10-27-17	TOLERA	PER ECR 9211 #1				
Α	AN	10-17-11	DRAWING CREATED PER DOR 11-E149SL					
REV.	INIT.	DATE	DESCRIPTION					
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. ALL UNITS ARE IN FEET.			ORIG. DRAWN BY: DATE: PAK 07/19/11 CHECKED BY:			601 E. WILDWOOD VILLA PARK, IL 60181		
- CDITICAL CHARACTERISTIC			APPROVED BY: SCALE SIZE SHEET			TITLE: PANEL CONNECTOR ASSEMBLY (4) #22 SOCKET CONTACTS, SOLDER CUP MICRO-CON-X		
			NTS	В	1 OF 1	CUSTOMER: STANDARD PRODUCT		
			FILE: 17882-45	G-300	SLW	PART NUMBER: 17882-4SG-300	REV B	

DIMENSIONS IN BRACKET [] ARE METRIC.

TOLERANCE: ±.003