


- NOTES:
- 1. PANEL CONNECTORS TO BE PACKED IN PARTITION BOX, 200 PC PER BOX
HEX NUT AND GASKET TO BE BULK PACKED IN A SEPARATE BAG FROM
PANEL ASSEMBLY PACKAGE.
 - 2. CONTACTS ARE ASSEMBLED INTO PANEL CONNECTOR.
 - 3. SEE DRAWING HPMCSTD FOR HOLE PATTERN.

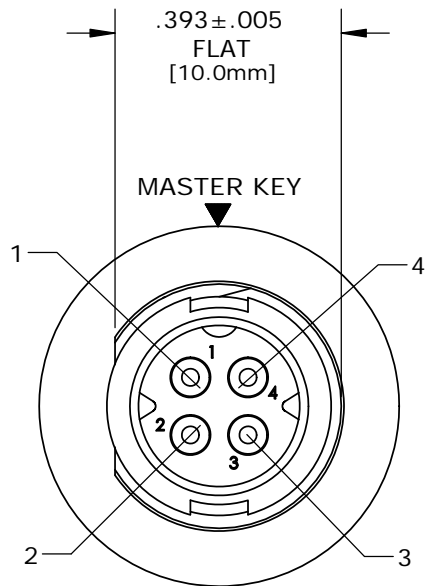


HEX NUT
5/8 IN. ACROSS FLATS
MAT'L: NYLON, BLACK

GASKET
MAT'L: RUBBER, BLACK

PANEL CONNECTOR, MALE
MAT'L: NYLON, BLACK

#22 PIN CONTACTS
MAT'L: GOLD PLATED
COPPER ALLOY

WIRE VIEW

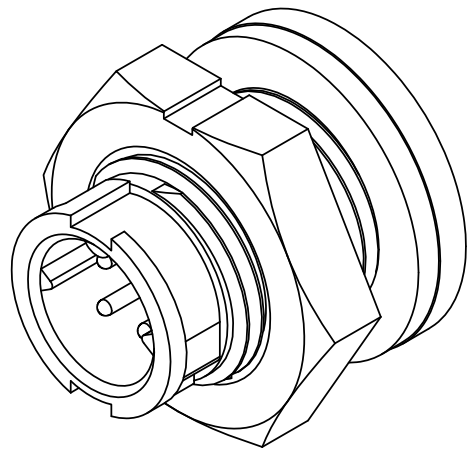

RECOMMENDED
PANEL CUT-OUT
TOLERANCE: $\pm .003$

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

RoHS COMPLIANT

B	SS	09-21-18	UPDATED MANUFACTURING DRAWING PER ECR 9315	
A	AN	10-12-11	DRAWING CREATED PER DOR 11-E149SL	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PAK	DATE: 07/19/11
			CHECKED BY:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS $\pm .005$ ANGLES $\pm 1^\circ$ FRACTIONS $\pm 1/16$ ▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			APPROVED BY:	
			SCALE: NTS	SIZE: B
			SHEET: 1 OF 1	
			FILE: 17883-4PG-300	DIRECTORY: SLW
			TITLE: PANEL CONNECTOR ASSEMBLY (4) #22 PIN CONTACTS, PC TAIL MICRO-CON-X STANDARD PRODUCT	
			PART NUMBER: 17883-4PG-300	REV B