



- NOTES:
- 1. ALL PARTS TO BE BULK PACKED
 - 2. CONTACTS ARE INSTALLED INTO CONNECTOR.



ASS'Y P/N	NO. OF CONTACT	CABLE O.D.
18282-2SG-311	2 POS.	.09-.14 [2.3-3.5mm]
18282-2SG-315		.15-.17 [3.8-4.3mm]
18282-2SG-318		.18-.20 [4.6-5.1mm]
18282-3SG-311	3 POS.	.09-.14 [2.3-3.5mm]
18282-3SG-315		.15-.17 [3.8-4.3mm]
18282-3SG-318		.18-.20 [4.6-5.1mm]

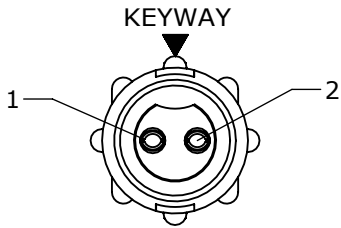

FACE VIEW
18282-2SG-3XX

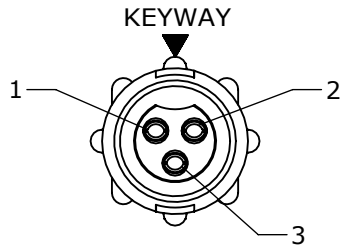

FACE VIEW
18282-3SG-3XX

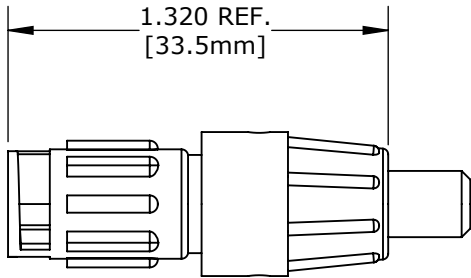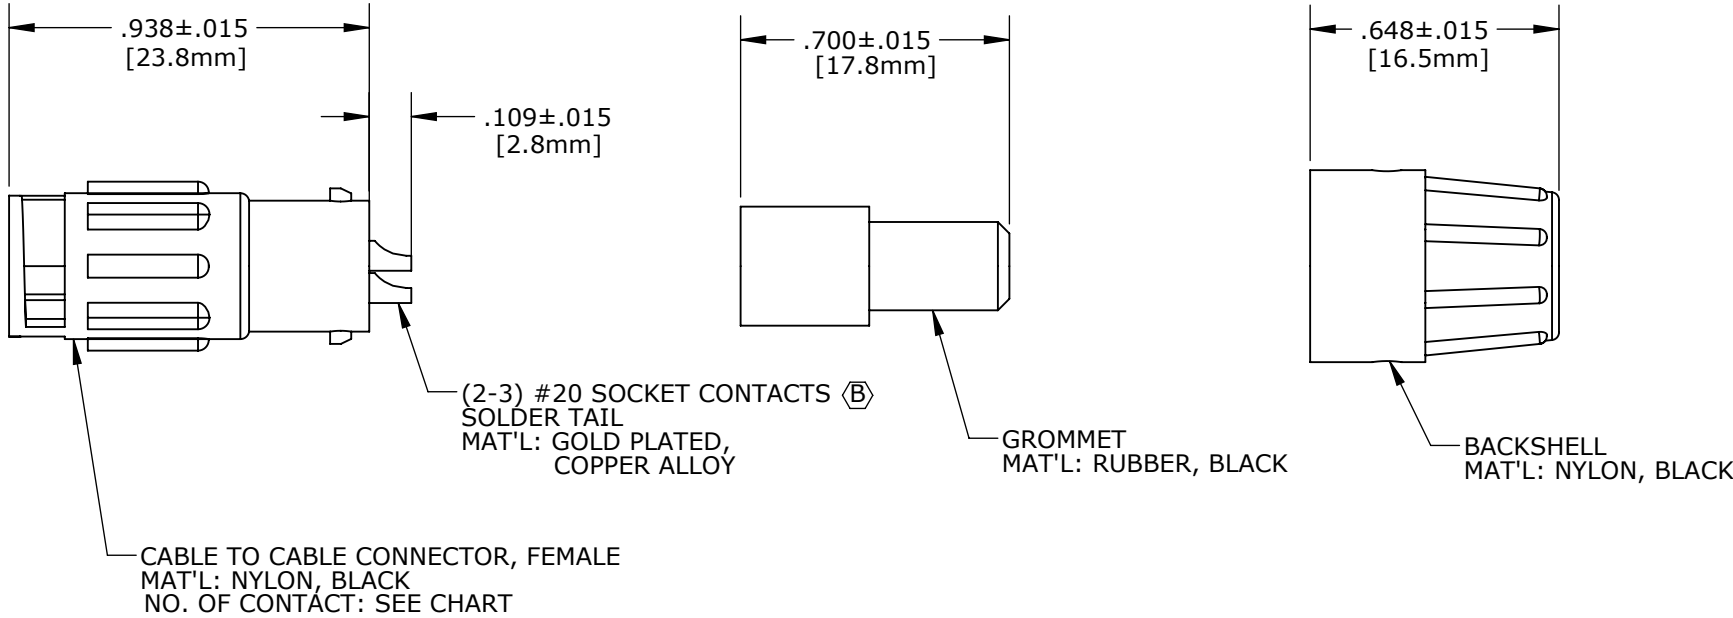


SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

RoHS COMPLIANT

B	AN	11-07-11	CORRECTED CONTACT DESCRIPTION FROM PIN TO SOCKET PER DOR 11-E149SL #60				
A	AN	08-29-11	DRAWING CREATED PER DOR 11-E149SL				
REV.	INIT.	DATE	DESCRIPTION				
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: DATE:		 601 E. WILDWOOD VILLA PARK, IL 60181		
			AN 08-25-11				
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.010 ANGLES ±1° FRACTIONS ±1/16 ▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			CHECKED BY:		TITLE: CABLE TO CABLE CONN. ASS'Y (2-3) #20 SOCKET CONTACTS, SOLDER MINI-CON-X CUSTOMER: STANDARD PRODUCT		
			APPROVED BY:				
SCALE		SIZE	SHEET		PART		
NTS		B	1 OF 1				
FILE:		DIRECTORY:		NUMBER:		REV	
18282-XSG-3XX		SLW		18282-XSG-3XX			