
**CUSTOMER PRINT** 


18882-4PG-5XX

- 1. PARTS ARE TO BE BULK PACKED.
  2. CONTACTS ARE ASSEMBLED INTO CONNECTOR.
  3. ALL DIMENSIONS ARE FOR REFERENCE ONLY EXCEPT IF THEY HAVE A TOLERANCE.

ASS'Y P/N	CABLE O.D.
18882-4PG-518	0.175 - 0.185 [4.4-4.7]
18882-4PG-521	0.205 - 0.215 [5.2-5.5]
18882-4PG-522	0.215 - 0.225 [5.5-5.7]
	<u> </u>


- GROMMET SIZE

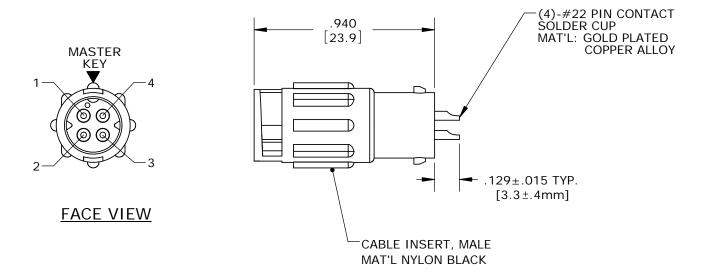

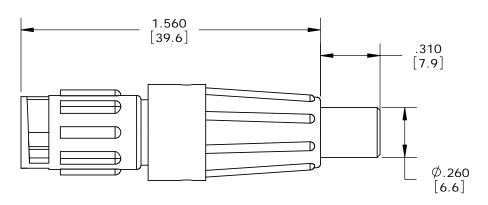

ASSEMBLED KIT VIEW FOR CUSTOMER REFERENCE ONLY

BRACKETS [] INDICATE METRIC DIMENSIONS.

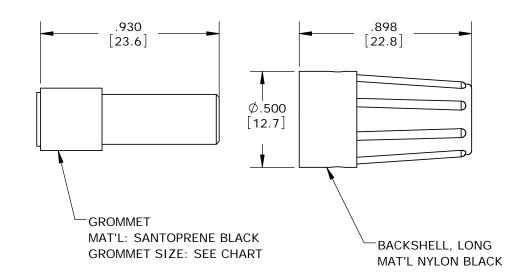

CUSTOMER APPROVAL		
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.		
APPROVED BY:DATE:	-	

**ROHS COMPLIANT** 

SS 06-08-18 UPDATE MANUFACTURING DRAWING PER ECR 9211-3 DRAWING NO. WAS 18882-4PG-XXX, REMOVED SHORT BACKSHELL ASSEMBLIES, ADDED TOLERANCE AND MATERIALS. PER ECR 8074 01-13-14 PD 09-01-11 UPDATE MANUFACTURING DRAWING PER ECR 7959 CHANGED CONTACT SOLDER BARREL FROM 20AWG TO 22AWG 07-21-10 03-24-10 DRAWING CREATED PER DOR 06-E168CS REV. INIT. DATE DESCRIPTION ORIG. DRAWN BY: PAK 03-24-10 ZONŁIGI DUPLICATION OR DISTRIBUTION THIS DOCUMENT IS PROHIBIT 601 E. WILDWOOD VILLA PARK, IL 60181 IN-LINE CONNECTOR KIT (4) #22 PIN CONTACT, SOLDER MICRO-CON-X R: STANDARD PRODUCT SCALE SIZE NTS B SHEET 1 OF 1 PART NUMBER: 18882-4PG-5XX