
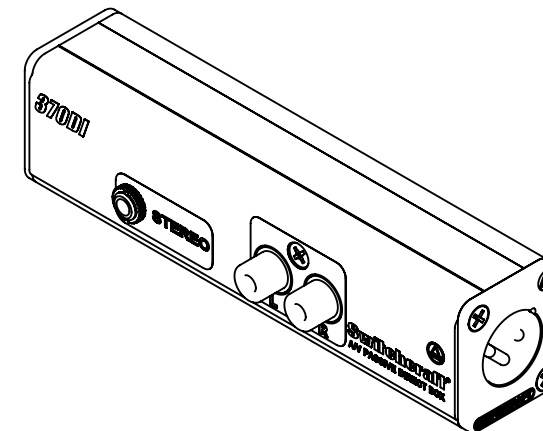
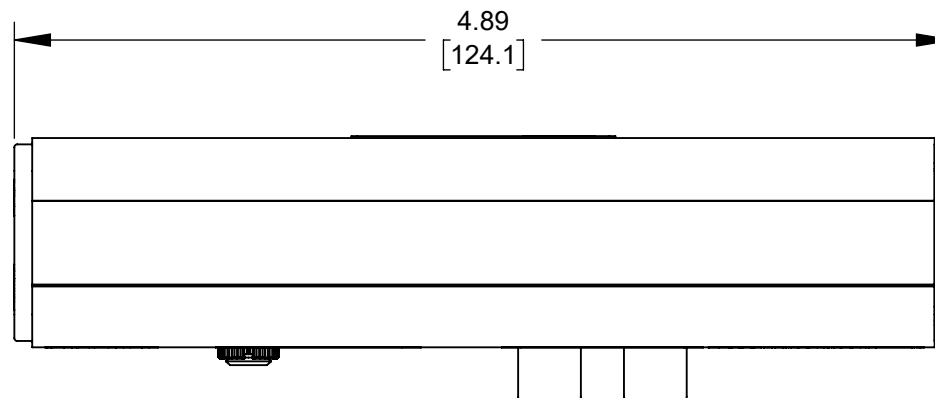
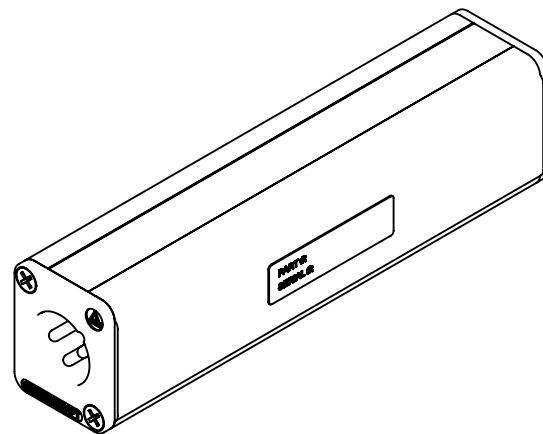



TOGGLE SWITCH
GROUND LIFT

TOGGLE SWITCH
20db PAD

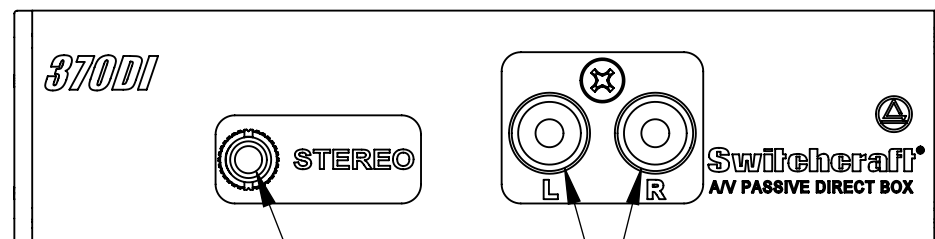

3.5mm STEREO INPUT

DUAL RCA INPUTS

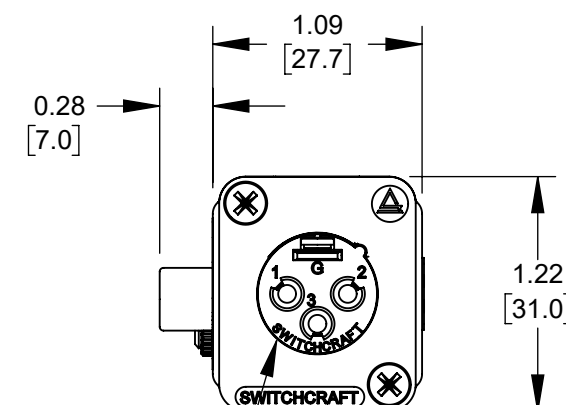

3 PIN MALE XLR OUTPUT
(DE SERIES LOCKING)


NOTES:

1. THE 370DI SUMS AND CONVERTS THE UNBALANCED STEREO OUTPUTS OF CELL PHONES, TABLETS, LAPTOPS AND COMPUTER GEAR TO A BALANCED MONO OUTPUT FOR CONNECTING TO AUDIO CONSOLES AND HOUSE SOUND SYSTEMS.

2. FEATURES:
DUAL RCA INPUTS
3.5mm INPUT (1/8" TRS JACK)
MALE XLR PROVIDES BALANCED, MONO, MIC LEVEL OUTPUT
GROUND LIFT
20db PAD TO ENABLE THE DEVICE TO HANDLE STRONGER SIGNALS

3. MATERIALS:
HOUSING - ALUMINUM, GOLD ANODIZED
3 PIN MALE XLR - ZINC ALLOY, NICKEL PLATED
WITH SILVER PLATED PINS
RCA JACK INPUTS - WHITE & RED INSERTS

4. THIS PRODUCT IS RoHS COMPLIANT.

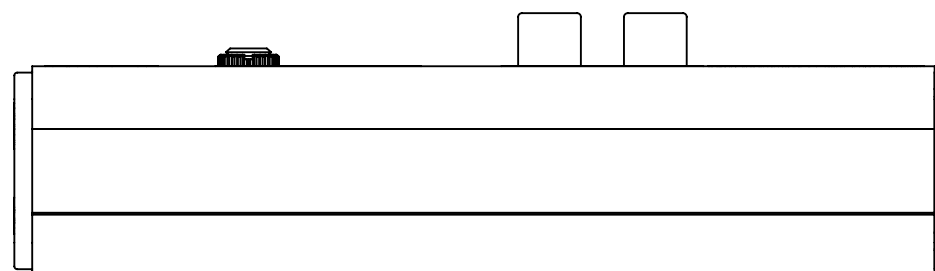

CUSTOMER DRAWING


					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.												
						SIZE	WIDTH		MULT		LBS/M		TEMPER					
						FINISH SPEC No.					MATERIAL SPEC No.							
						FIRST USED ON				SCALE 1:1		Switchcraft® SHEET 1 OF 2						
						DATE DRAWN 8/31/17	BY TJK	CHKD TJK 8/31/17	APVD NS 8/31/17									
A	28783	01/28/26	PC	TJK		NAME					AUDIOSTIX A/V PASSIVE DI, RoHS					PART No. 370DI		REV A
REV	ECO NUMBER	DATE	BY	APVD		DO NOT SCALE DRAWING												
REVISIONS																		

370DI
Specifications

Switchcraft®

Parameter	Performance	Conditions
Frequency Response	20Hz - 20kHz	+/-2dB, ref 1kHz.
Total Harmonic Distortion + Noise	0.12%	at 1kHz, with Pad OFF
Maximum input level, Pad OFF	20	dBV
Maximum input level, Pad ON	40	dBV
Voltage gain	-4.5	dB, Pad: OFF,
Input Impedance	>1900 Ω	at 1kHz
Output Impedance	<700 Ω	at 1kHz
Deviation from Linear Phase	$\leq 30^\circ$ $\leq 3^\circ$ $\leq 30^\circ$	at 20Hz at 1KHz at 20kHz
Pad Attenuation	-20	dB

All measurments were done with 1.5k Ω load.
Specifications subject to change without notice.
Revision 0A (05/31/16)

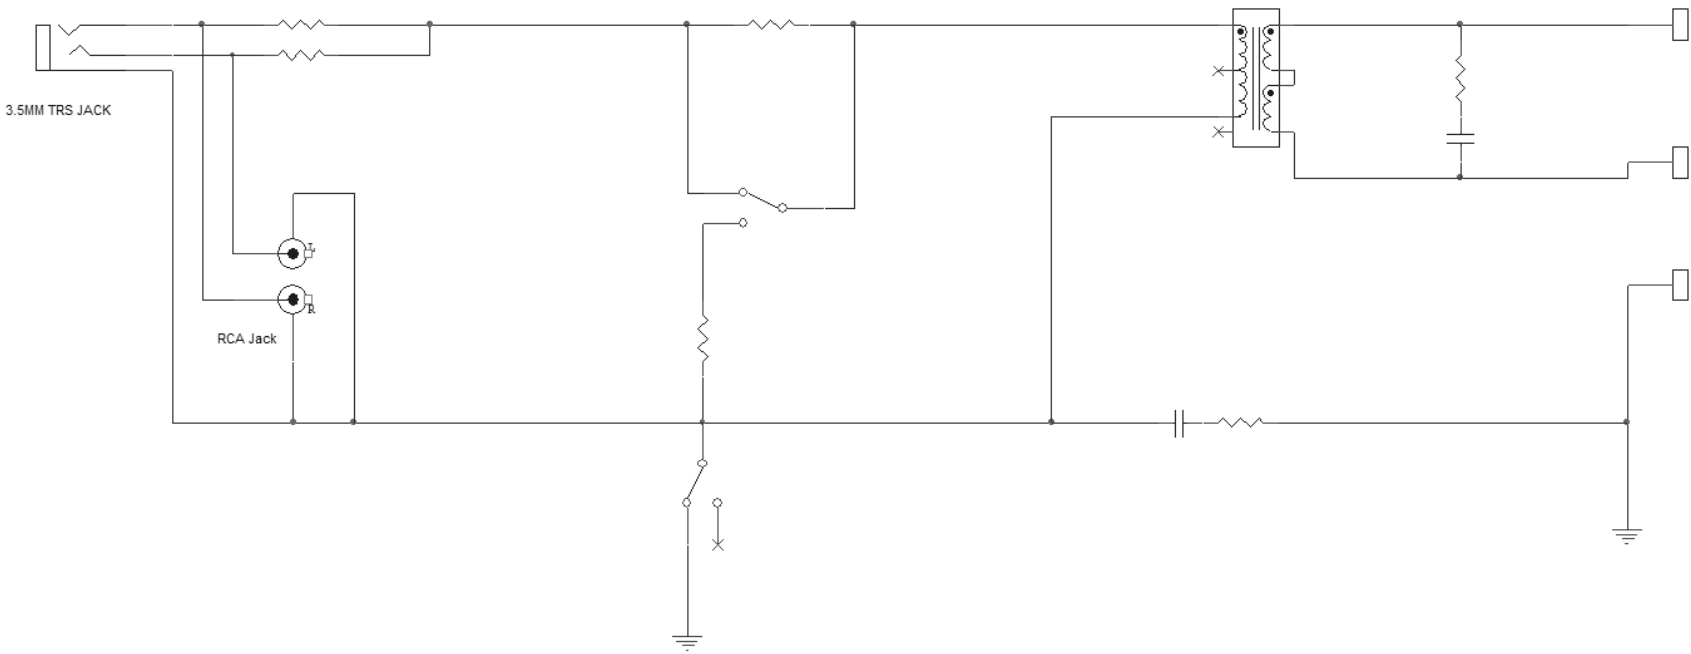

CUSTOMER DRAWING

SCALE 1:1	Switchcraft®	
DATE DRAWN 8/31/17		
DRAWN BY TJK	PART No. 370DI	REV A