


4

3

2

1 LUS ***

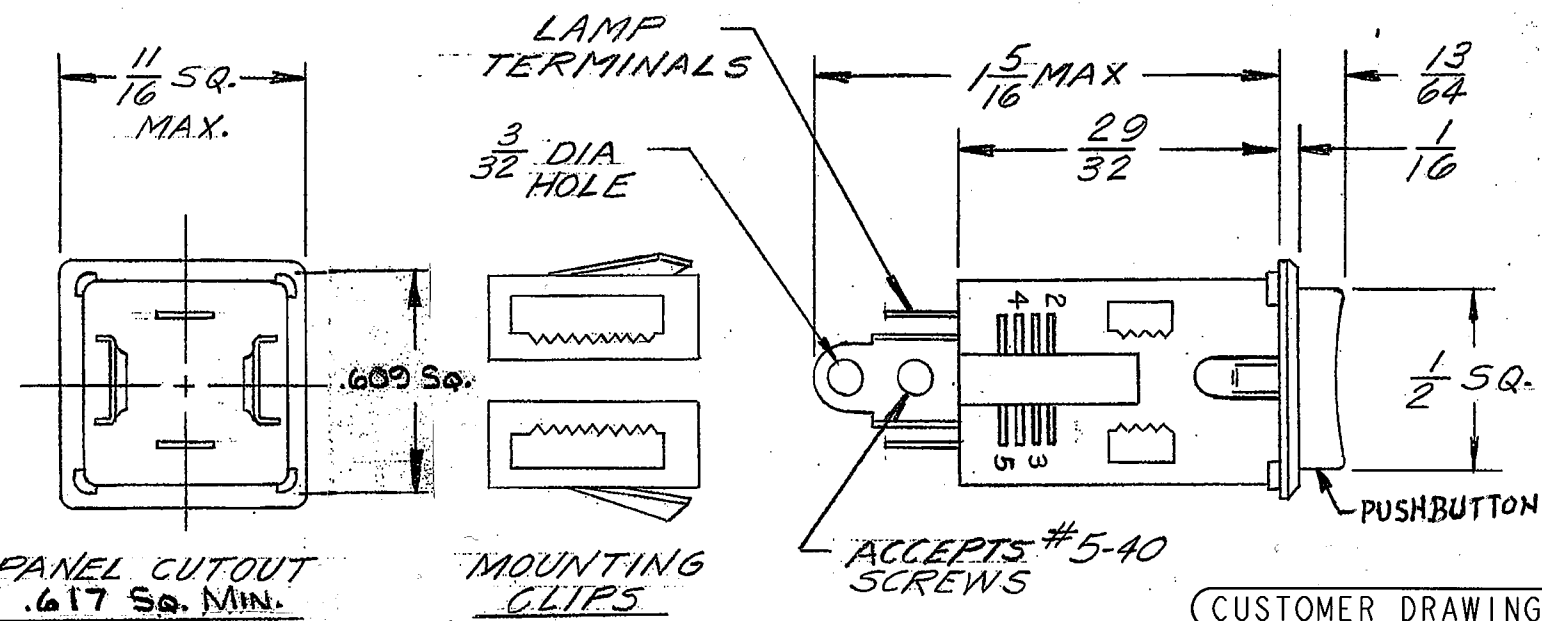

CUSTOMER DRAWING

NOTES:

1. MOMENTARY SWITCH ACTION, $\frac{1}{16}$ BUTTON STROKE
2. CONTACT ARRANGEMENT - SINGLE POLE, N.O.
3. CONTACT RATING - 0.5 AMP, 60 WATT MAX., RES.
4. DIELECTRIC STRENGTH: 500 V. RMS, MIN.
5. SWITCH MOUNTS IN PANEL $\frac{3}{64}$ THRU $\frac{9}{32}$ THICK.
6. SWITCH ACCEPTS IND. #7377 BI-PIN LAMP (P-2290).
7. SWITCH SUPPLIED WITH TWO MOUNTING CLIPS.

PART NUMBER	PUSHBUTTON COLOR
LUS001	NONE - SWITCH ONLY
LUS011	RED
LUS031	GREEN
LUS041	BLUE
LUS051	WHITE

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT, INC., AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSE ONLY.

UNLESS OTHERWISE SPECIFIED:

1. DECIMAL DIMENSIONS $\pm .005$
2. FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
3. ANGLES $\pm \frac{1}{2}^\circ$
4. ALL DIA'S CONCENTRIC WITHIN .005 T.I.R.
5. ALL DIMENSIONS IN INCHES
6. FOR THREADS USE UNIFIED PLUG AND RING GAGES ONLY.
7. REMOVE ALL BURRS.
8. PART TO BE FABRICATED AS SPECIFIED. MAKE NO DIMENSIONAL ALLOWANCES FOR APPLIED FINISHES, I.E., PLATING, PAINTING, ETC.
9. HOLES ON SAME CENTERLINE MUST BE ALIGNED WITHIN $\pm .002$

DO NOT SCALE DRAWING

DRAWN BY V.L.	DATE 4-17-68	FINISH
CHECKED BY A.M.	DATE 11-9-84	PER FINISH SPEC. NO.
APPROVED BY L.G.	DATE 4-22-68	MATERIAL
SCALE 2/1	FIRST USED ON STD	PER MAT. SPEC. NO.
NAME LITED UNISWITCH		PART NO. LUS*** SERIES
SOLDER/SCREW TERMINAL		ISSUE E
SHEET		OF

DATE	BY	REVISION	ISS	SYM
4-17-68	K.S.	ECO* 20627	B	
4-18-68	K.S.	ECO* 21044	C	
4-18-68	K.S.	ECO* 21098	D	
4-18-68	K.S.	ECO* 21162	E	