

CUSTOMER PRINT


PART NUMBER: W16282-XPG-P-5XX

NOTES:


1. ALL PARTS TO BE BULK PACKED
2. CONTACTS ASSEMBLED INTO CONNECTOR
3. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	FOR CABLE O.D.
W16282-XPG-P-518	.175-.185 [4.4-4.7]
W16282-XPG-P-521	.205-.215 [5.2-5.5]
W16282-XPG-P-522	.215-.225 [5.5-5.7]


ASS'Y P/N	CONTACT QTY.
W16282-2PG-P-5XX	2
W16282-3PG-P-5XX	3
W16282-XPG-P-5XX	

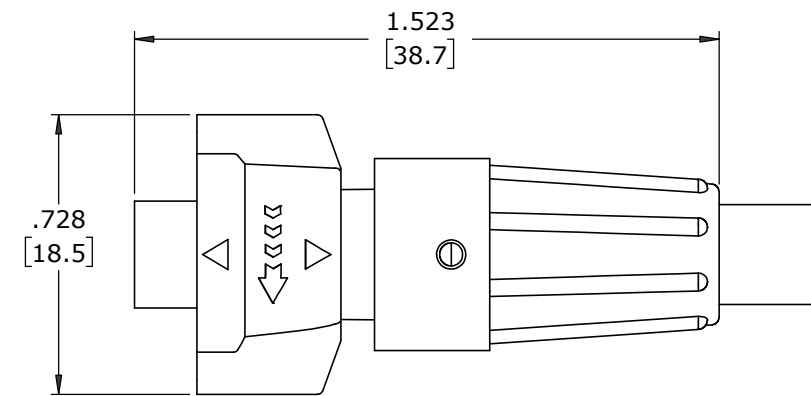



SHOWN ASSEMBLED  
FOR CUSTOMER REFERENCE ONLY

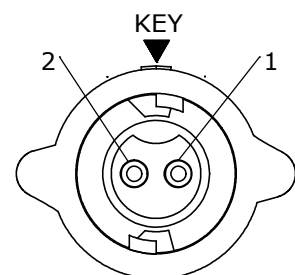


**FACE VIEW**  
W16282-2PG-P-5XX

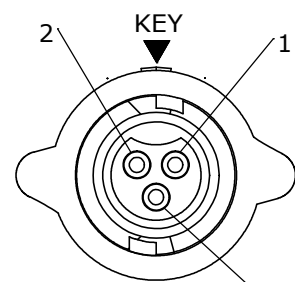

**FACE VIEW**  
W16282-3PG-P-5XX

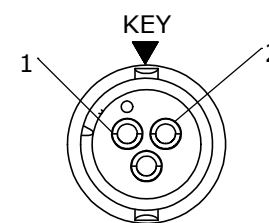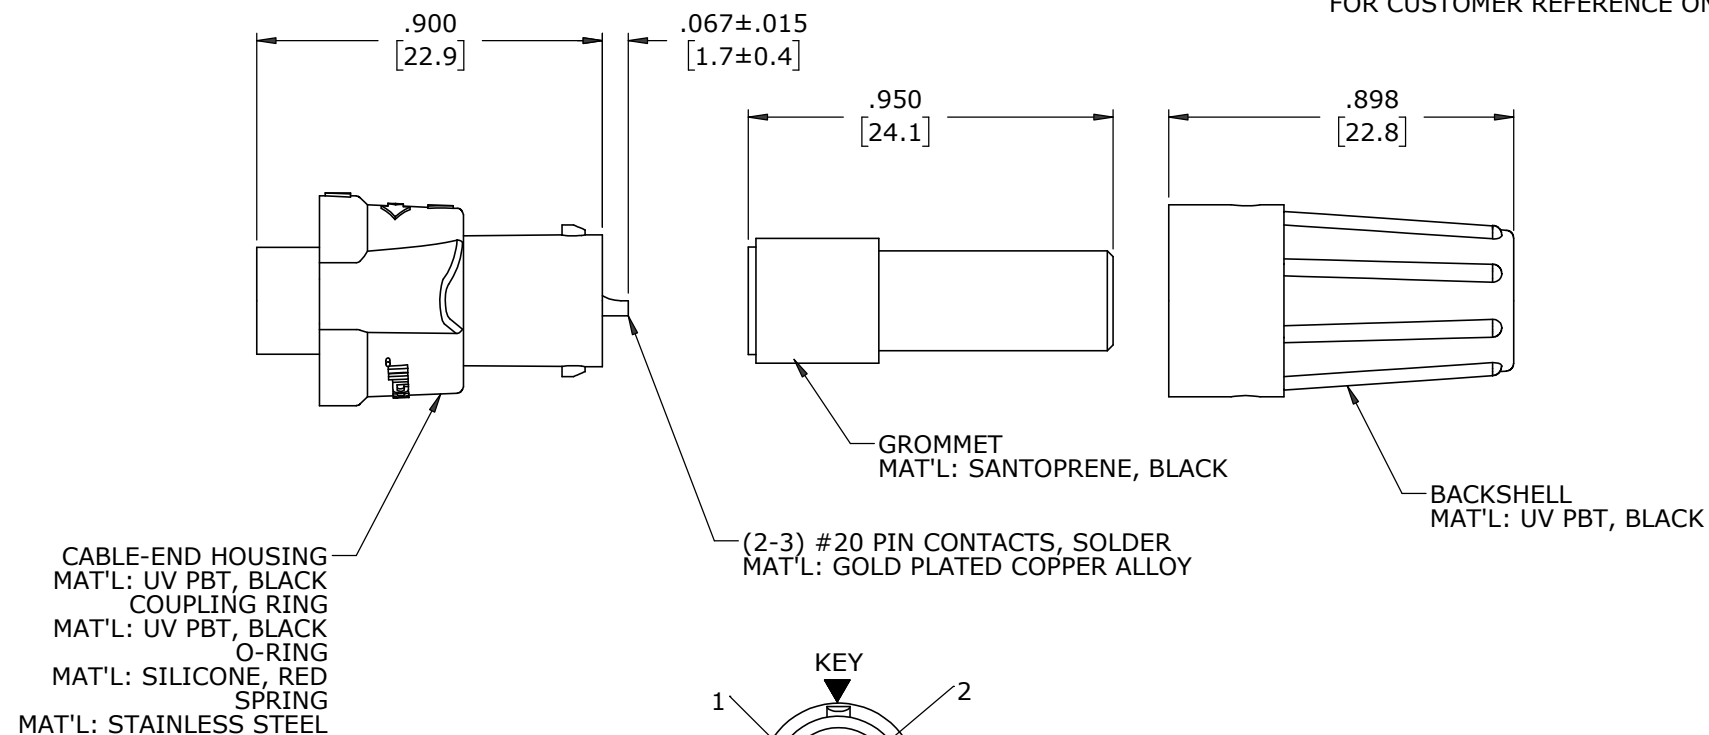

**WIRING VIEW**  
W16282-2PG-P-5XX

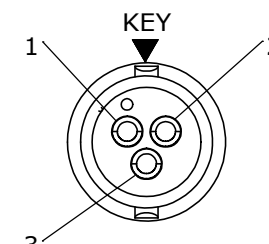

**WIRING VIEW**  
W16282-3PG-P-5XX

DIMENSIONS IN BRACKETS [ ] ARE IN METRIC

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_

**RoHS COMPLIANT**

REV.	INIT.	DATE	DESCRIPTION
A	MA	08-14-20	RELEASED PER PDR 18004-4
	JGK	03/04/20	ADDED SHEET 2 FOR CABLE-END ASSEMBLY INSTRUCTIONS.
	JGK	9/05/19	DRAWING CREATED FOR PDR #18004.

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.		ORIG. DRAWN BY: JGK	DATE: 9/05/19
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.		APPROVED BY: _____	
UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 ANGLES ±1° FRACTIONS ±1/16		SCALE: NTS	SIZE: B
- CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX		SHEET: 1 OF 1	TITLE: CABLE-END ASSEMBLY (2-3) #20 PIN CONTACTS, SOLDER INSTA-CLICK™ MICRO-CON-X STANDARD PRODUCT
FILE: W16282-XPG-P-5XX	DIRECTORY: SLW	PART NUMBER: W16282-XPG-P-5XX	REV: A



601 E. WILDWOOD VILLA PARK, IL 60181