


ASS'Y P/N	CONTACT QTY.
W16880-4SG-P-518	4
W16880-4SG-P-521	4
W16880-4SG-P-522	4

NOTES:

1. ALL PARTS TO BE BULK PACKED.
2. CONTACTS SHIPPED UNASSEMBLED
3. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

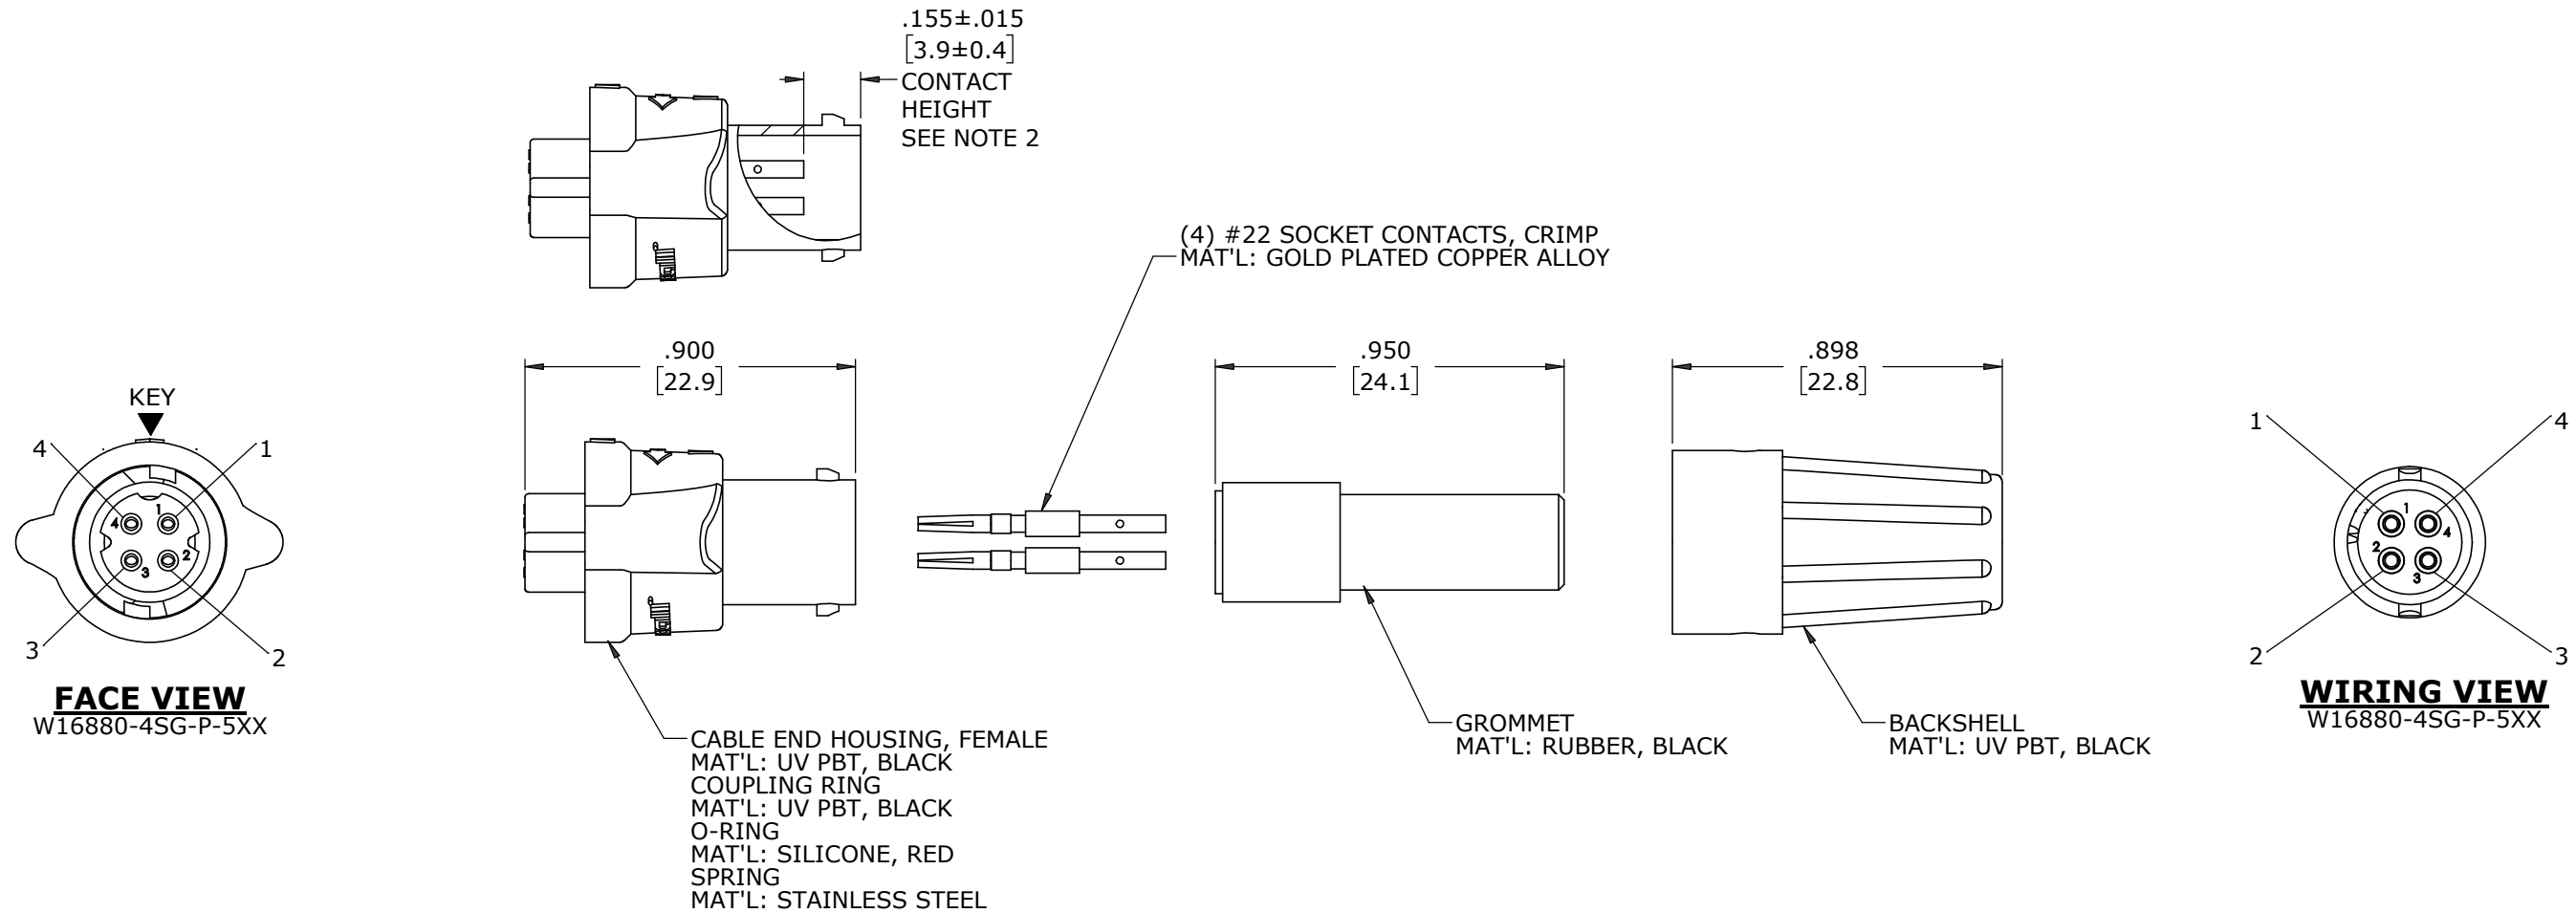

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

DIMENSIONS IN BRACKETS [] ARE METRIC

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

MA	08-17-20	RELEASED PER PDR 18004-4	
A	JGK	3/03/20	
	JGK	9/09/19	
REV.	INIT.	DATE	DESCRIPTION
	JGK	9/09/19	ADDED SHEET 2 FOR CABLE-END ASSEMBLY INSTRUCTIONS.
	JGK	9/09/19	DRAWING CREATED FOR PDR #18004.
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.		ORIG. DRAWN BY: JGK	DATE: 9/09/19
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.		CHECKED BY:	<p>601 E. WILDWOOD VILLA PARK, IL 60181</p>
UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.005 ANGLES ±1° FRACTIONS ±1/16		APPROVED BY:	
SCALE	SIZE	SHEET	TITLE:
NTS	B	1 OF 1	(4) #22 SOCKET CONTACTS, CRIMP INSTA-CLICK™ MICRO-CON-X STANDARD PRODUCT
FILE:	DIRECTORY:	PART NUMBER:	CUSTOMER:
W16880-4SG-P-5XX	SLW	W16880-4SG-P-5XX	
- CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			REV A

CUSTOMER PRINT

PART NUMBER: W16880-4SG-P-5XX