


- NOTES:
- 1. ALL PARTS TO BE BULK PACKED
 - 2. CONTACTS INSERTED INTO CONNECTOR WITH SOLDER CUPS FACING OUTWARD RADIALY. CENTER CONTACT SHOULD BE FACING BETWEEN POSITIONS 1 AND 6
 - 3. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	NO. OF CONTACTS	KEY STYLE
W17982-5SG-P-300	5 #26	A-KEY
W17982-6SG-P-300	6 #26	B-KEY
W17982-7SG-P-300	7 #26	A-KEY

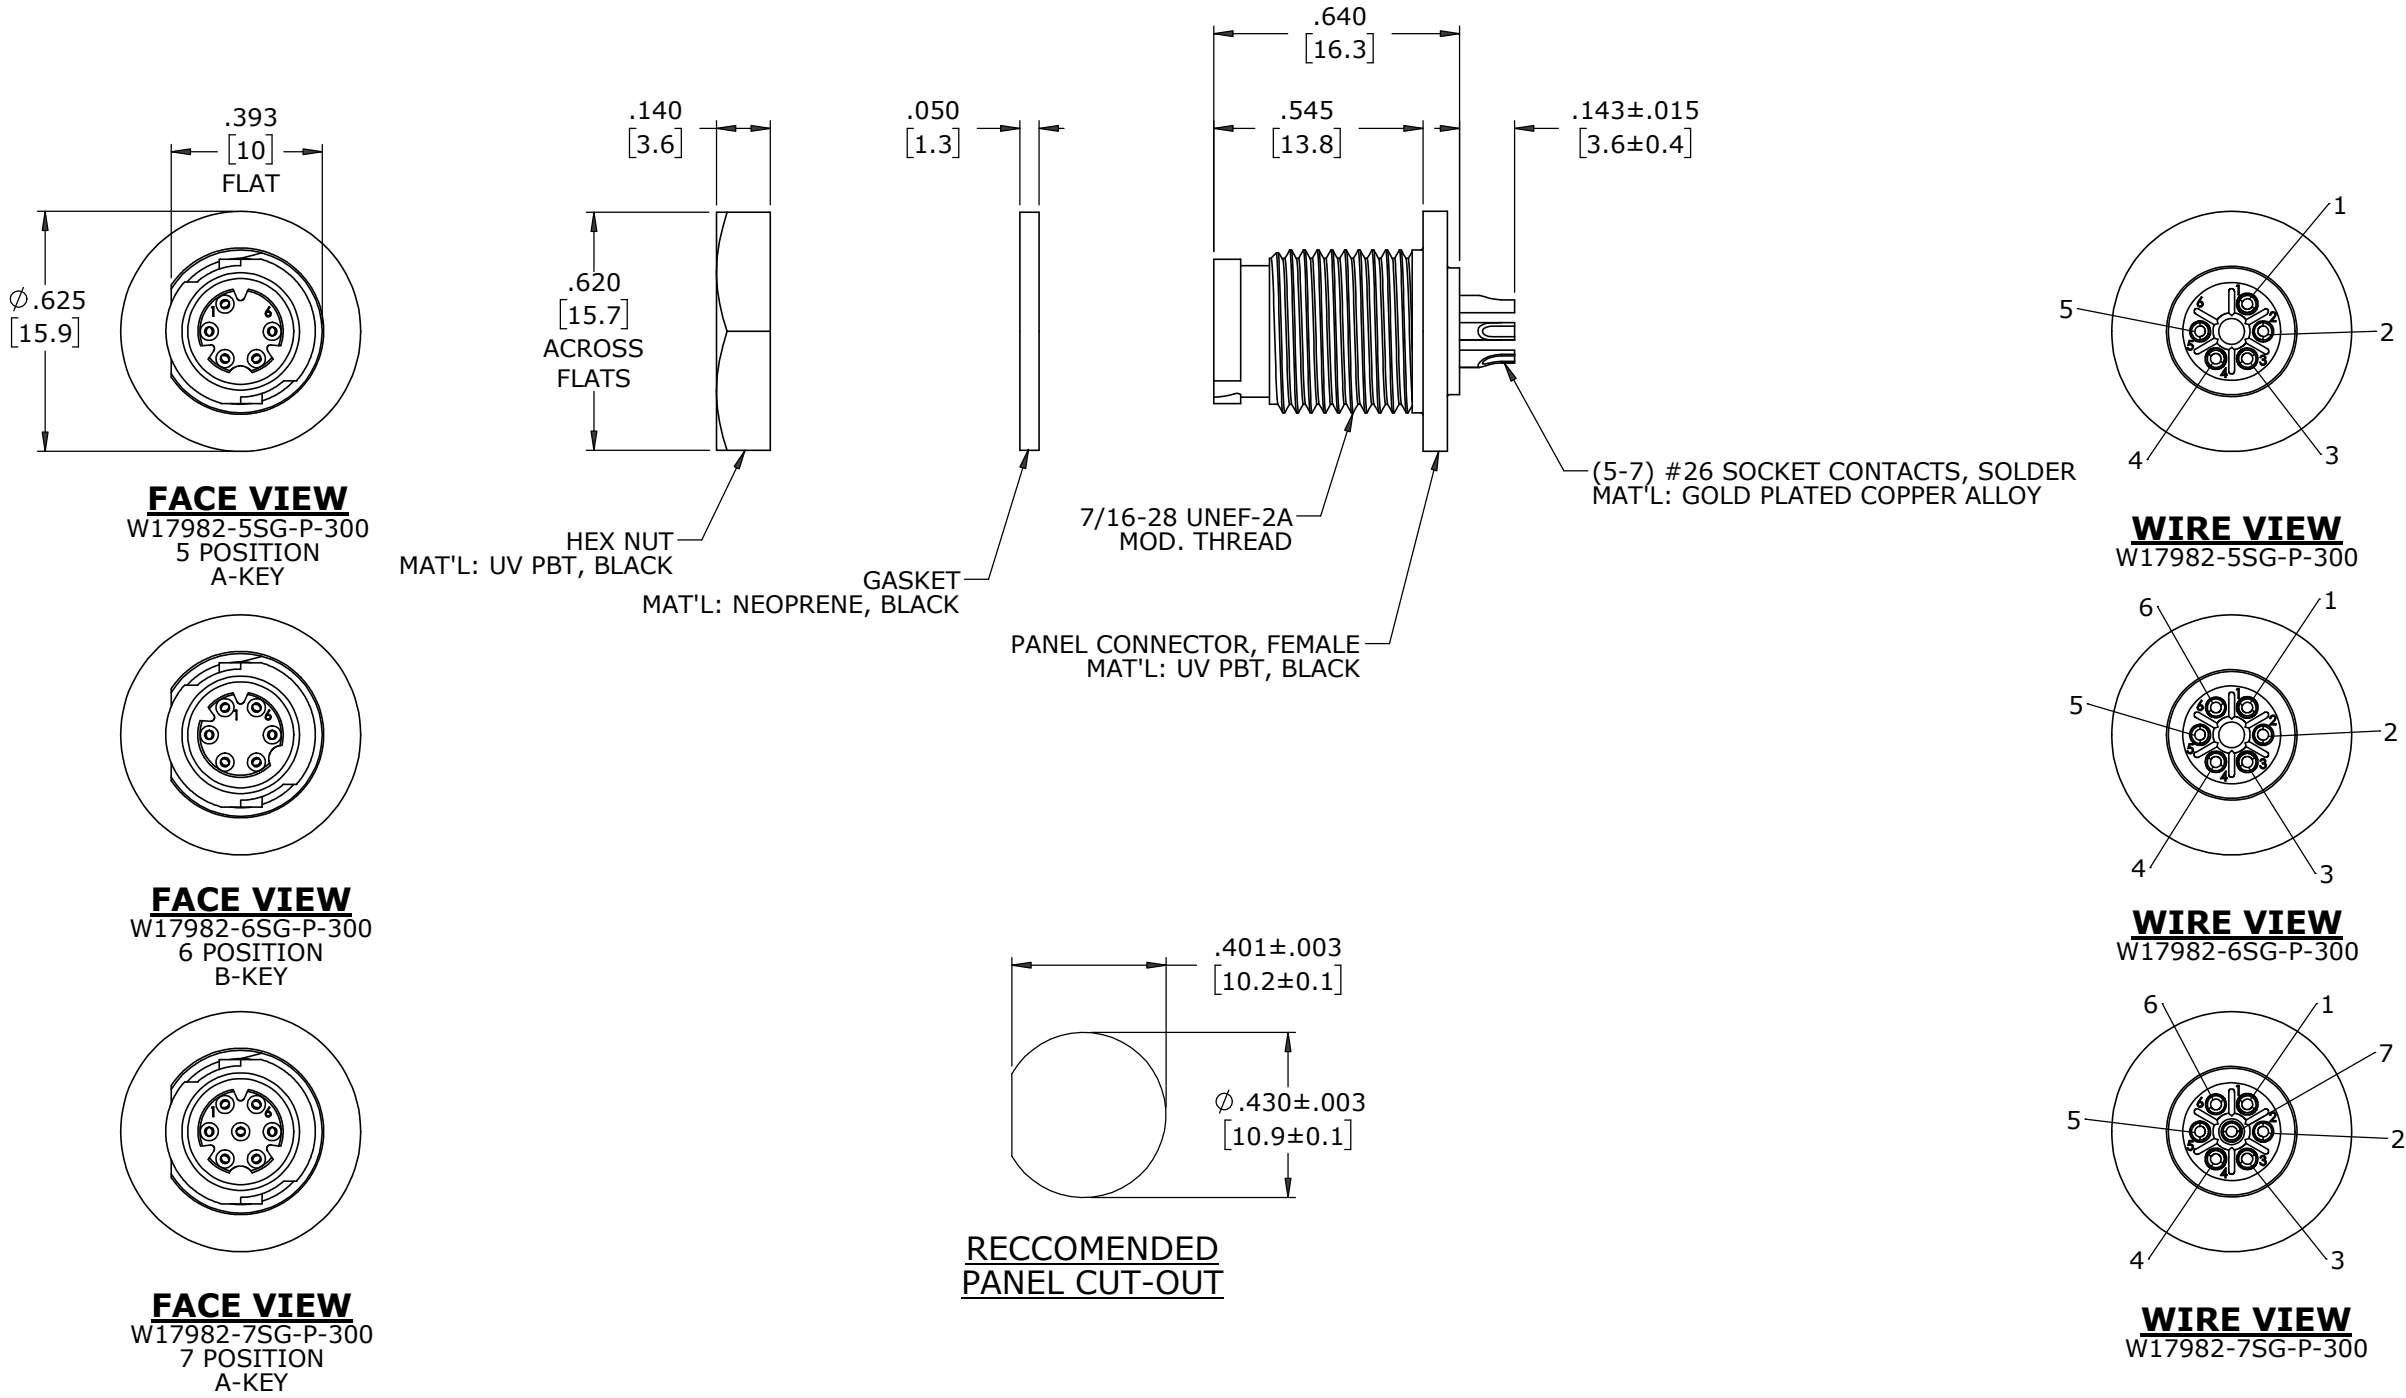

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			
RoHS COMPLIANT			
A	MA	08-10-20	RELEASED PER PDR 18004-2
	JGK	8/13/19	DRAWING CREATED FOR PDR #18004
REV.	INIT.	DATE	DESCRIPTION
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: JGK DATE: 8/13/19
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY: _____
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			APPROVED BY: _____
SCALE: NTS SIZE: B SHEET: 1 OF 1			TITLE: PANEL MOUNT ASSEMBLY (5-7) #26 SOCKET CONTACTS, SOLDER INSTA-CLICK™ MICRO-CON-X STANDARD PRODUCT
FILE: W17982-XSG-P-300 DIRECTORY: SLW			CUSTOMER: _____
PART NUMBER: W17982-XSG-P-300			REV: A

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED