


ASSY P/N	GROMMET SIZE
W3B80-7PG-P-535	GROMMET ID .375 [9.5] FOR CABLE OD .350-.400 [8.9-10.2]

- NOTES:**
1. PARTS TO BE BULK PACKED.
2. CONTACTS ARE SUPPLIED UNASSEMBLED.
3. ALL DIMENSIONS ARE REFERENCE EXCEPT WHERE NOTED WITH TOLERANCE.

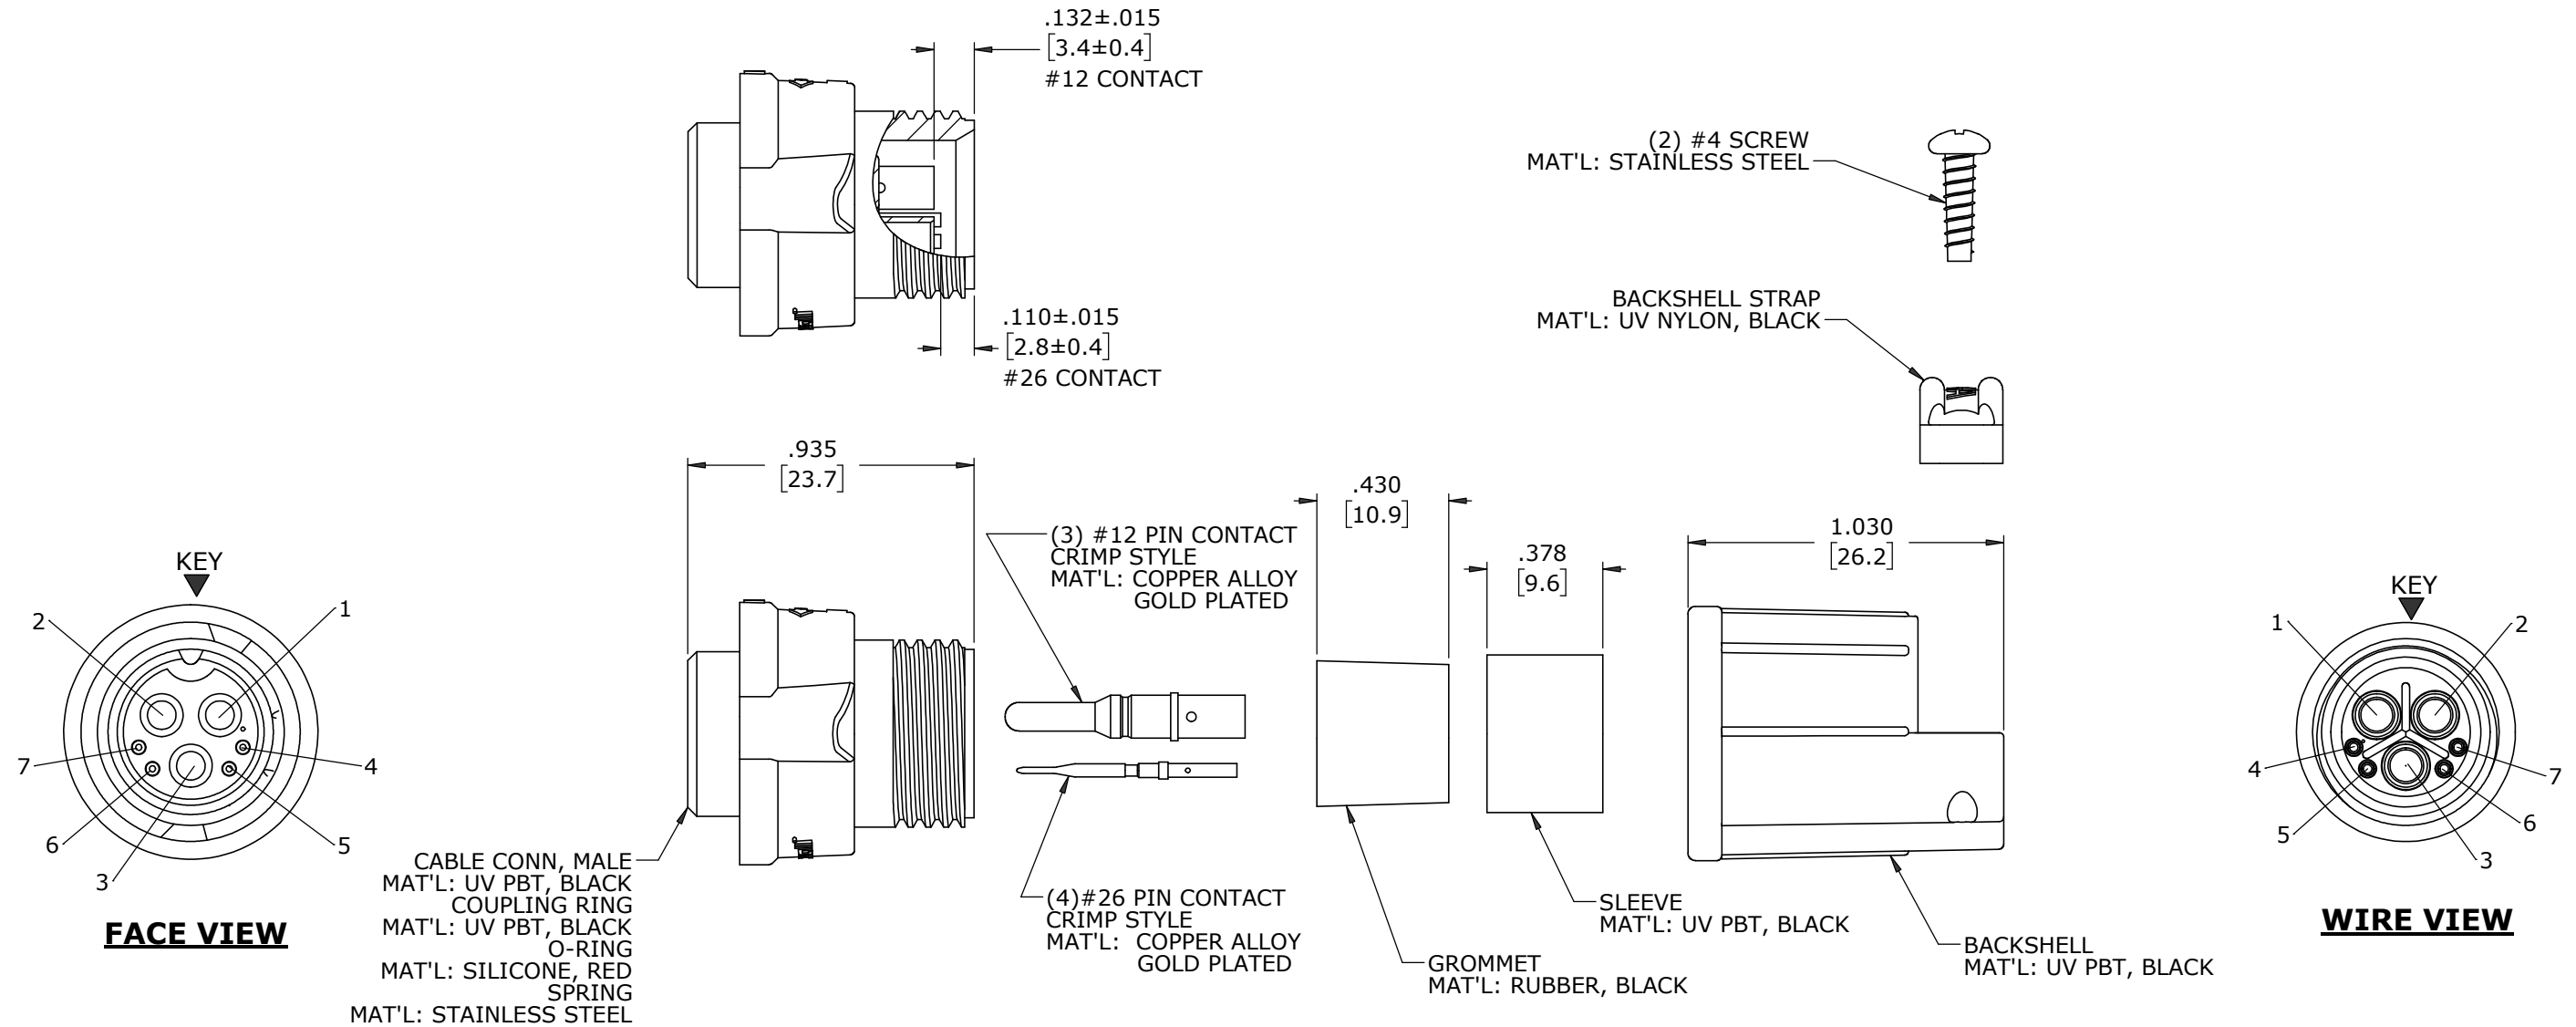

DIMENSIONS IN BRACKETS [] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	09-24-24	RELEASED PER PDR 20013-9			
	AB	03-22-24	O-RING WAS 6290S-1; P-20013-9			
		04-20-21	DRAWING CREATED PER PDR 20013; P-20013-6			
REV.	INIT.	DATE	DESCRIPTION			
<div>ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.</div>			ORIG. DRAWN BY: AB		DATE: 04-20-21	<div>conxall</div> <div>601 E. WILDWOOD VILLA PARK, IL 60181</div>
			CHECKED BY:			
<div>ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.</div>			APPROVED BY:		TITLE: CABLE END CONNECTOR KIT (3) #12 + (4) #26 PIN CONTACTS, CRIMP MULTI-CON-X, WEATHER RESISTANT CUSTOMER: STANDARD PRODUCT	
			SCALE NTS	SIZE B	SHEET 1 OF 1	PART NUMBER: W3B80-7PG-P-5XX
▷	= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX		FILE: W3B80-7PG-P-5XX		DIRECTORY: SLW	REV A