


ASSY P/N	GROMMET SIZE
W3B82-7PG-P-335	GROMMET ID .375 [9.5] FOR CABLE OD .350-.370 [8.9-9.4]

- NOTES:**
- PARTS TO BE BULK PACKED.
 - SOLDER CONTACTS ARE PRESSED INTO CONNECTOR WITH ALL CONTACTS FACING AWAY FROM KEY (DOWN).
 - ALL DIMENSIONS ARE FOR REFERENCE EXCEPT WHERE NOTED WITH TOLERANCE.

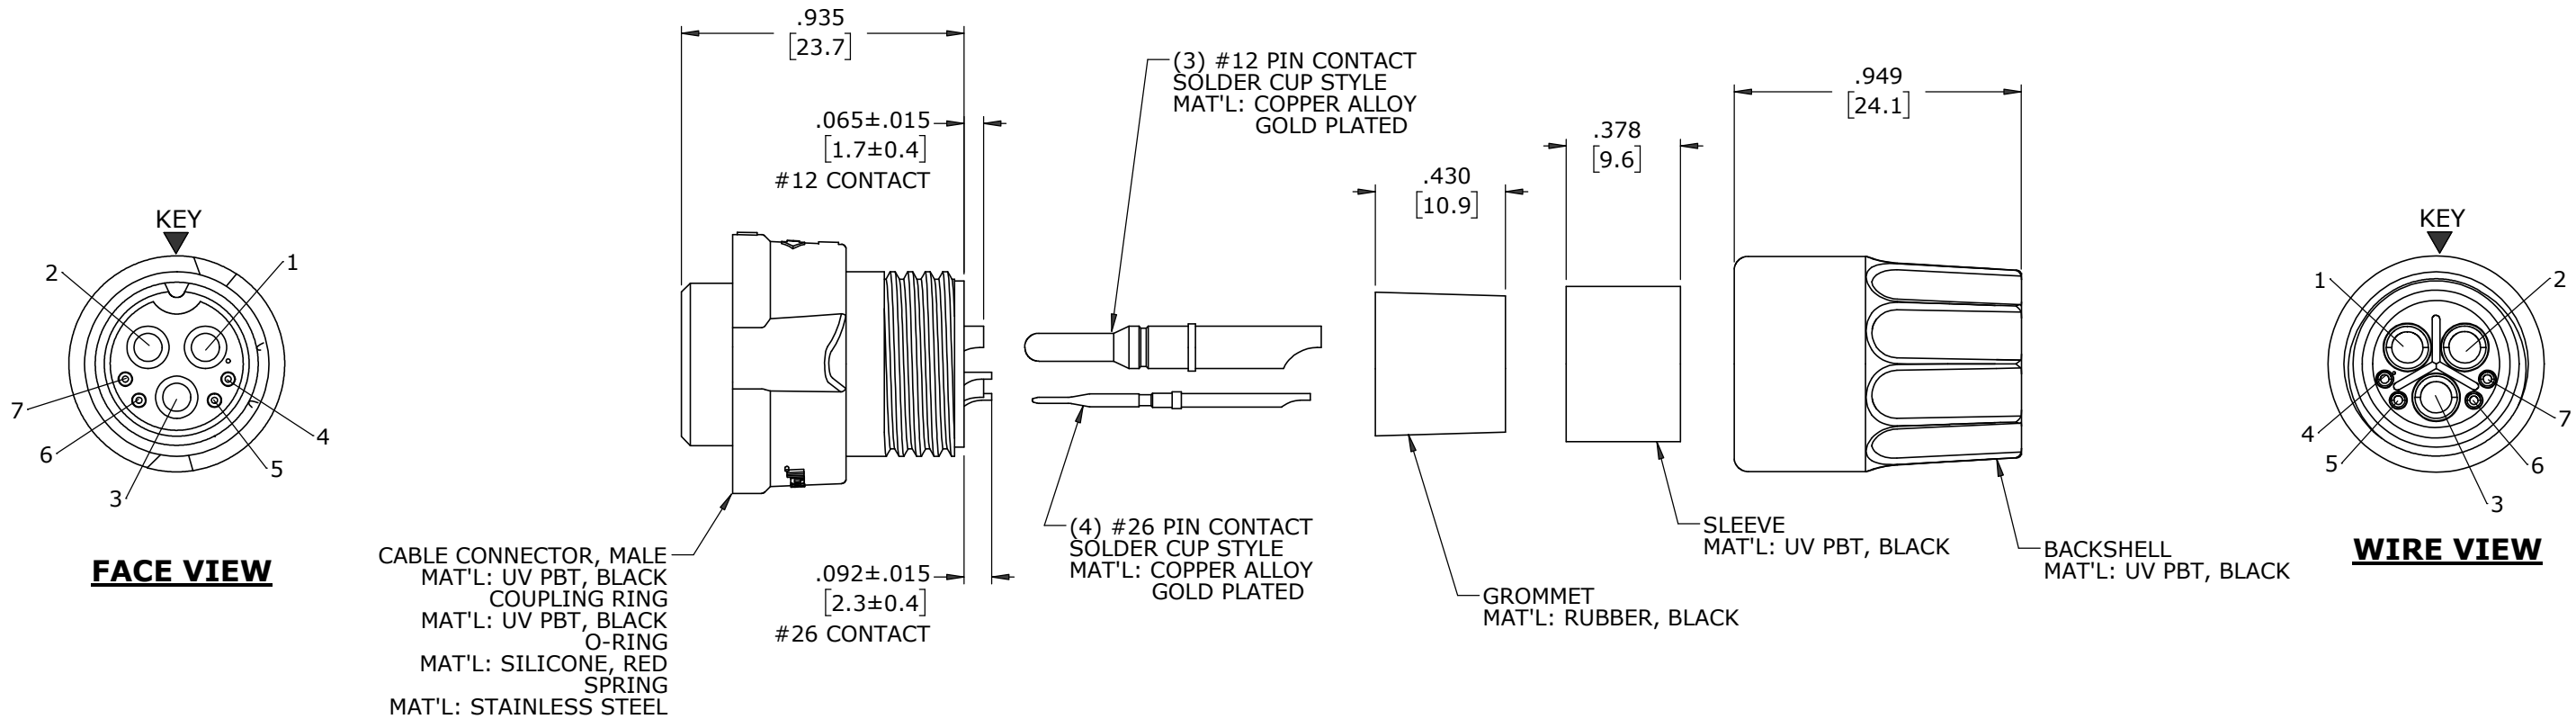


ASSEMBLED VIEW
FOR CUSTOMER REF ONLY

DIMENSIONS IN BRACKETS [] ARE METRIC.

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

RoHS COMPLIANT

A	MA	09-25-24	RELEASED PER PDR 20013-9		
	AB	03-22-24	O-RING WAS 6290S-1; P-20013-9		
		09-03-21	CHANGED TO ALL SOLDER CUPS FACING DOWN; P-20013-6		
		04-20-21	DRAWING CREATED PER PDR 20013		
REV.	INIT.	DATE	DESCRIPTION		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB		DATE: 04-20-21
			CHECKED BY:		 601 E. WILDWOOD VILLA PARK, IL 60181
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		
			SCALE NTS	SIZE B	SHEET 1 OF 1
FILE: W3B82-7PG-P-3XX			DIRECTORY: SLW		PART NUMBER: W3B82-7PG-P-3XX
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			REV A		