

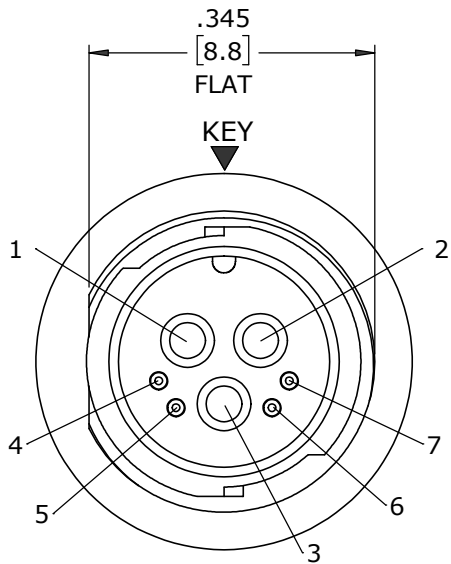


NOTES:


- 1. FINISHED PRODUCT TO BE BOXED.  
HEX NUTS AND GASKETS MAY BE PACKAGED SEPARATELY.
- 2. CONTACTS ARE INSTALLED IN CONNECTOR.
- 3. REAR WELL FILLED WITH BLACK EPOXY.
- 4. SEE DRAWING HPMUSTD FOR HOLE PATTERN
- 5. ALL DIMENSIONS ARE FOR REFERENCE ONLY EXCEPT WHERE NOTED WITH TOLERANCE.



FACE VIEW



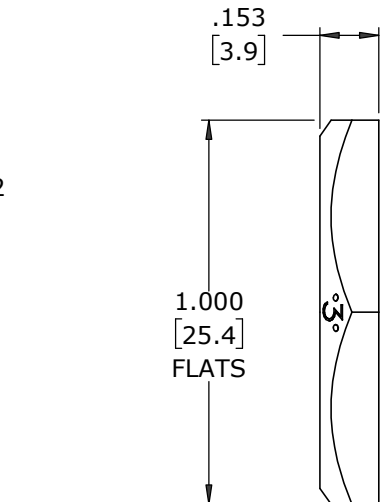


HEX NUT  
MAT'L: UV PBT, BLACK

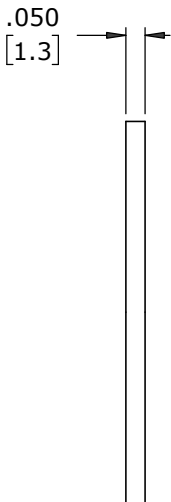


GASKET  
MAT'L: RUBBER, BLACK

13-16-27 UNS-2A  
MODIFIED THREAD

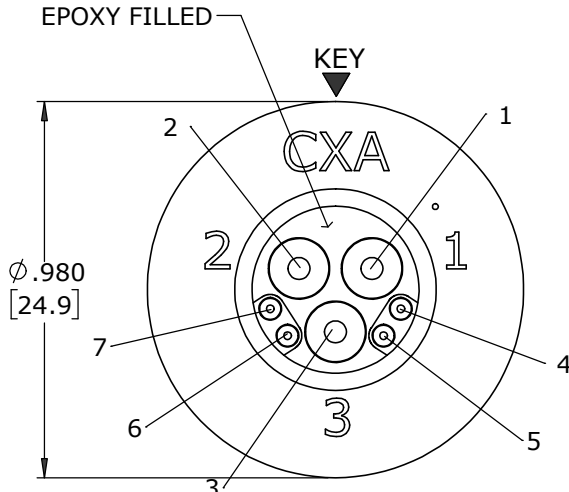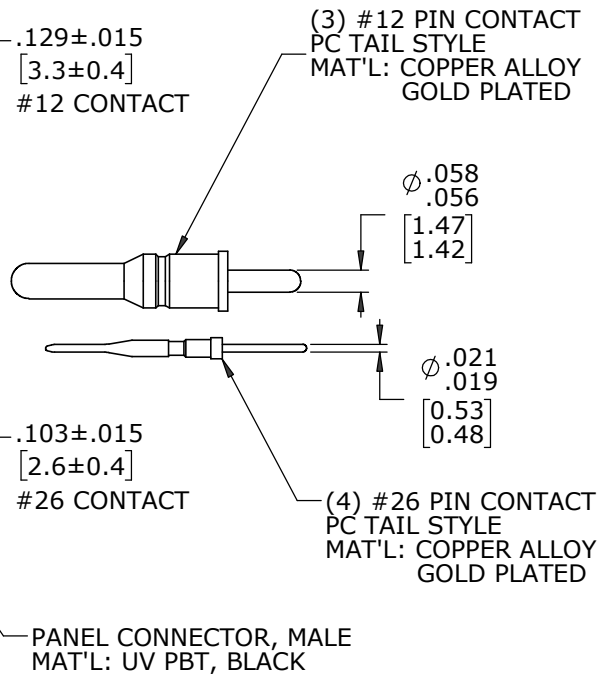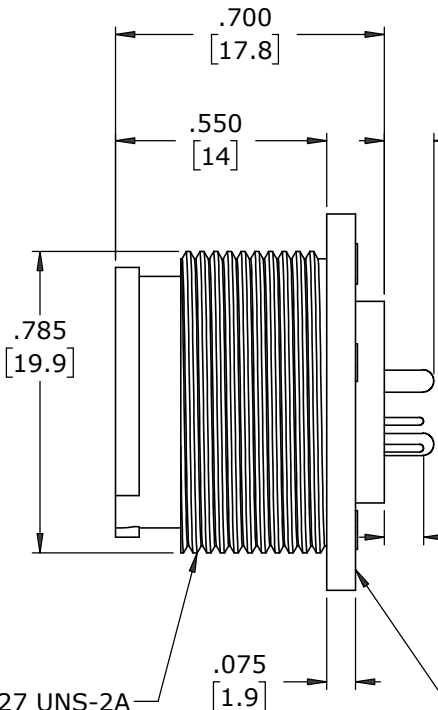

WIRE VIEW

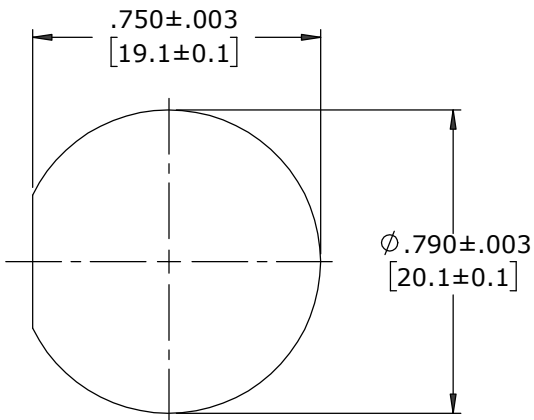

RECOMMENDED  
PANEL CUT-OUT

DIMENSIONS IN BRACKETS [ ] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_

RoHS COMPLIANT

|                                                                                                                                                |       |          |                                                                                                                                            |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|--------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| A                                                                                                                                              | MA    | 10-01-24 | RELEASED PER PDR 20013-7                                                                                                                   |  |  |
|                                                                                                                                                | AB    | 03-22-21 | CREATED PER PDR 20013; P-20013-7                                                                                                           |  |  |
| REV.                                                                                                                                           | INIT. | DATE     | DESCRIPTION                                                                                                                                |  |  |
| ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. |       |          | <div>ORIG. DRAWN BY: DATE:<br/>AB 03-22-21</div> <div>CHECKED BY:</div> <div>601 E. WILDWOOD VILLA PARK, IL 60181</div> <div>conxall</div> |  |  |
| ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.                                                                                |       |          |                                                                                                                                            |  |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES:<br>3 PLACE DECIMALS ±.005<br>ANGLES ±1°<br>FRACTIONS ±1/16                                              |       |          | TITLE: PANEL CONNECTOR KIT<br>(3) #12 + (4) #26 PIN CONTACTS, PC TAIL<br>MULTI-CON-X, W.R. INSTA-CLICK™                                    |  |  |
| APPROVED BY:                                                                                                                                   |       |          | CUSTOMER: STANDARD PRODUCT                                                                                                                 |  |  |
| SCALE SIZE SHEET<br>NTS B 1 OF 1                                                                                                               |       |          | PART NUMBER: W4B81-7PG-P-3ES                                                                                                               |  |  |
| FILE: W4B81-7PG-P-3ES                                                                                                                          |       |          | DIRECTORY: SLW                                                                                                                             |  |  |
| = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX                                                                                                  |       |          | REV A                                                                                                                                      |  |  |