


- 5. ALL DIMENSIONS ARE FOR REFERENCE ONLY EXCEPT WHERE NOTED WITH TOLERANCE.



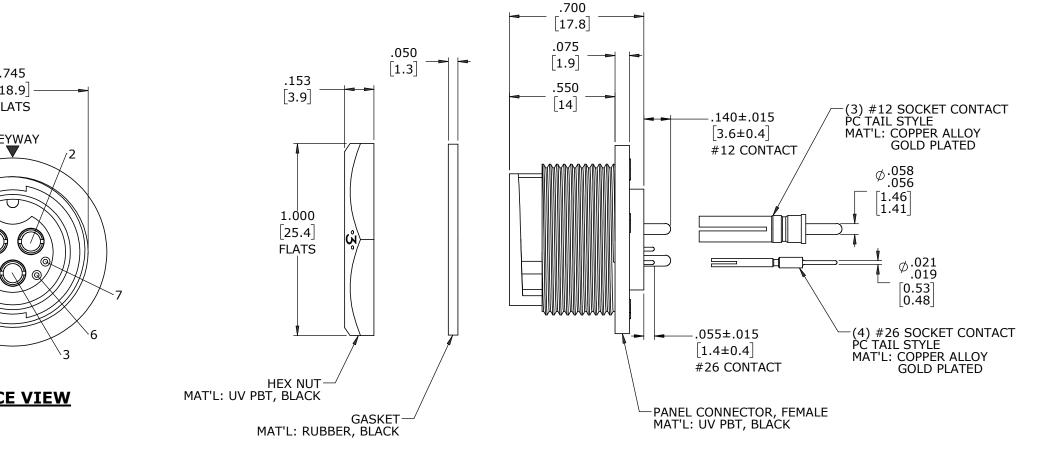



WIRE VIEW

.750 19.1 90d. Ø [20.1]

RECOMMENDED PANEL CUT-OUT **TOLERANCE ±.003 [0.1]** **CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIA INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSL' PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: DATE:

DIMENSIONS IN BRACKET [] ARE METRIC.

Rohs Compliant

AL LL	Α	MA	09-11-24	RELEASED PER PDR 20013-4	
		AB	03-19-21	DRAWING CREATED PER PDR 20013; P-20013-4	
LY	REV.	INIT.	DATE	DESCRIPTION	
	ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: DATE: AB 03-19-21	- Comell
				CHECKED BY:	SOMESSIII

601 E. WILDWOOD VILLA PARK, IL 60181 PANEL CONNECTOR KIT
(3) #12 + (4) #26 SOCKET CONTACTS, PCT

MULTI-CON-X, WEATHER RESISTANT

USTOMER: STANDARD PRODUCT SCALE NTS

ILE: W4B81-7SG-3ES PART NUMBER: W4B81-7SG-3ES