



ASSY P/N	GROMMET SIZE
W5B82-7SG-535	GROMMET IS .375 [9.5] FOR CABLE OD .350-.400 [8.9-10.2]

NOTES:

1. PARTS TO BE BULK PACKED.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR, WITH ALL CONTACTS FACING AWAY FROM KEY (DOWN).
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY EXCEPT WHERE NOTED WITH TOLERANCE.




ASSEMBLED VIEW
FOR CUSTOMER REF ONLY

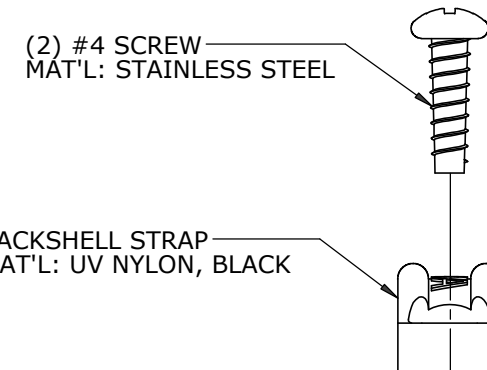

(2) #4 SCREW
MAT'L: STAINLESS STEEL

BACKSHELL STRAP
MAT'L: UV NYLON, BLACK

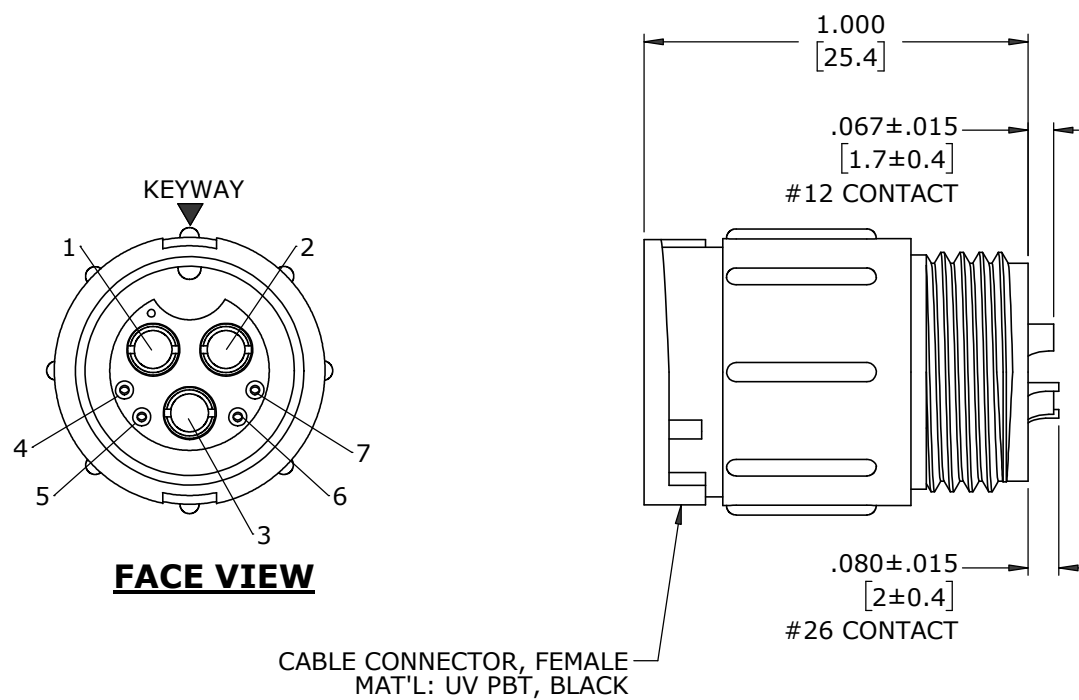


FACE VIEW

CABLE CONNECTOR, FEMALE
MAT'L: UV PBT, BLACK

1.000
[25.4]
#12 CONTACT

.067±.015
[1.7±0.4]
#26 CONTACT

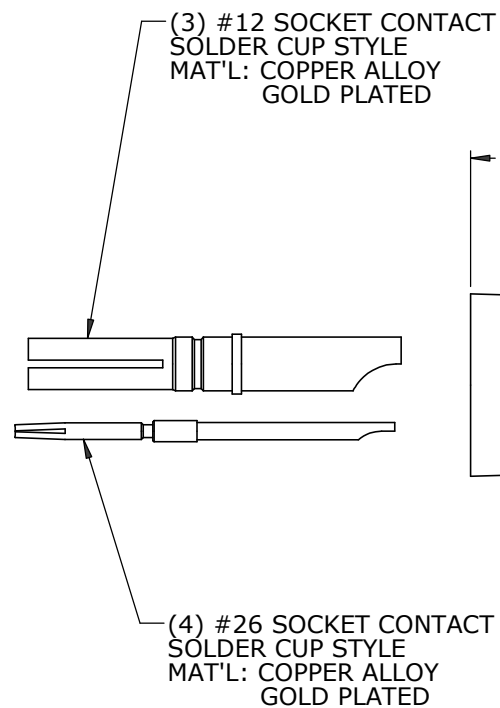

(3) #12 SOCKET CONTACT
SOLDER CUP STYLE
MAT'L: COPPER ALLOY
GOLD PLATED

(4) #26 SOCKET CONTACT
SOLDER CUP STYLE
MAT'L: COPPER ALLOY
GOLD PLATED

.430
[10.9]


GROMMET
MAT'L: RUBBER,
BLACK

.378
[9.6]


SLEEVE
MAT'L: PBT, BLACK

1.030
[26.2]

BACKSHELL
MAT'L: UV PBT, BLACK

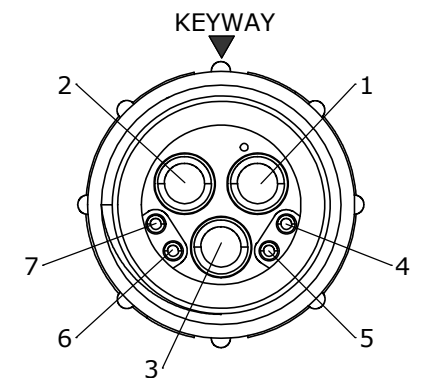

WIRE VIEW

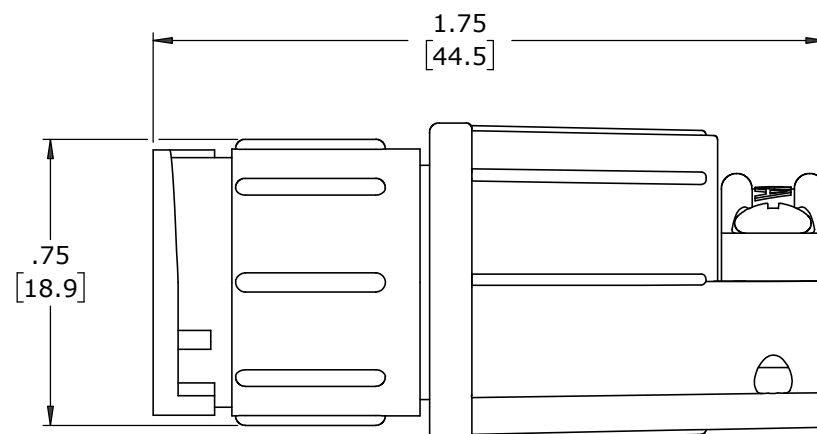

ASSEMBLED VIEW
FOR CUSTOMER REF ONLY

DIMENSIONS IN BRACKETS [] ARE METRIC.

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	09-18-24	RELEASED PER PDR 20013-5	
	AB	06-07-21	CHANGED TO ALL SOLDER CUPS FACING DOWN; P-20013-5	
		04-15-21	DRAWING CREATED PER PDR 20013	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB	DATE: 04-15-21
			CHECKED BY:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	
			TITLE: CABLE TO CABLE CONNECTOR KIT (3)#12 + (4)#26 SKT CONTACTS, SOLDER CUP MULTI-CON-X, WEATHER RESISTANT STANDARD PRODUCT	
SCALE: NTS		SIZE: B	SHEET: 1 OF 1	CUSTOMER: STANDARD PRODUCT
FILE: W5B82-7SG-5XX		DIRECTORY: SLW	PART NUMBER: W5B82-7SG-5XX	
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				REV A