


ASSY P/N	GROMMET SIZE
W5B82-7SG-P-335	GROMMET ID .375 [9.5] FOR CABLE OD .350-.370 [8.9-9.4]

**NOTES:**

1. PARTS TO BE BULK PACKED.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR WITH ALL CONTACTS FACING AWAY FROM KEY (DOWN).
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY EXCEPT WHERE NOTED WITH TOLERANCE.

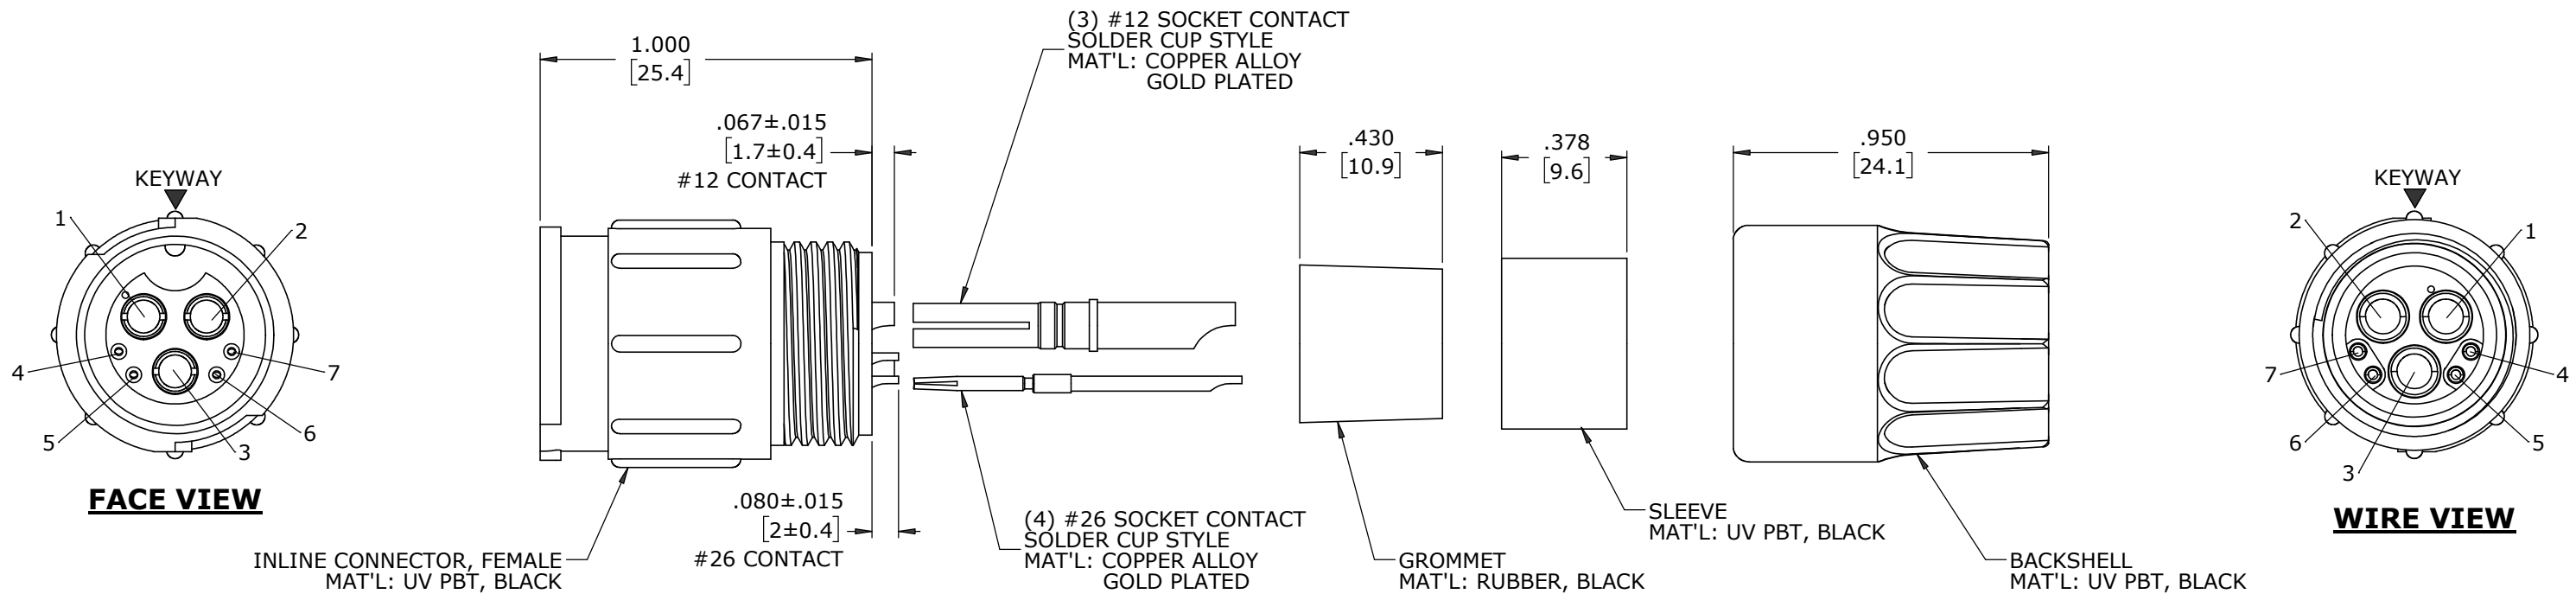


DIMENSIONS IN BRACKETS [ ] ARE METRIC.

## CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: \_\_\_\_\_  
DATE: \_\_\_\_\_

**RoHS COMPLIANT**

A	MA	10-03-24	RELEASED PER PDR 20013-8				
	AB	09-03-21	CHANGED TO ALL SOLDER CUPS FACING DOWN; P-20013-8				
		04-08-21	DRAWING CREATED PER PDR 20013				
REV.	INIT.	DATE	DESCRIPTION				
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: DATE: AB 04-08-21		 601 E. WILDWOOD VILLA PARK, IL 60181		
			CHECKED BY:				
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		TITLE: CABLE TO CABLE CONNECTOR KIT (3) #12 + (4) #26 SKT CONTACTS, SOLDER CUP MULTI-CON-X, W.R. INSTA-CLICK™ CUSTOMER: STANDARD PRODUCT		
			SCALE NTS	SIZE B	SHEET 1 OF 1		
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: W5B82-7SG-P-3XX	DIRECTORY: SLW		PART NUMBER: W5B82-7SG-P-3XX	REV A