


- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS SUPPLIED UNASSEMBLED
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
13280-18SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	18 #20
13280-18SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
13280-18SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
13280-20SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	20 #20
13280-20SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
13280-20SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

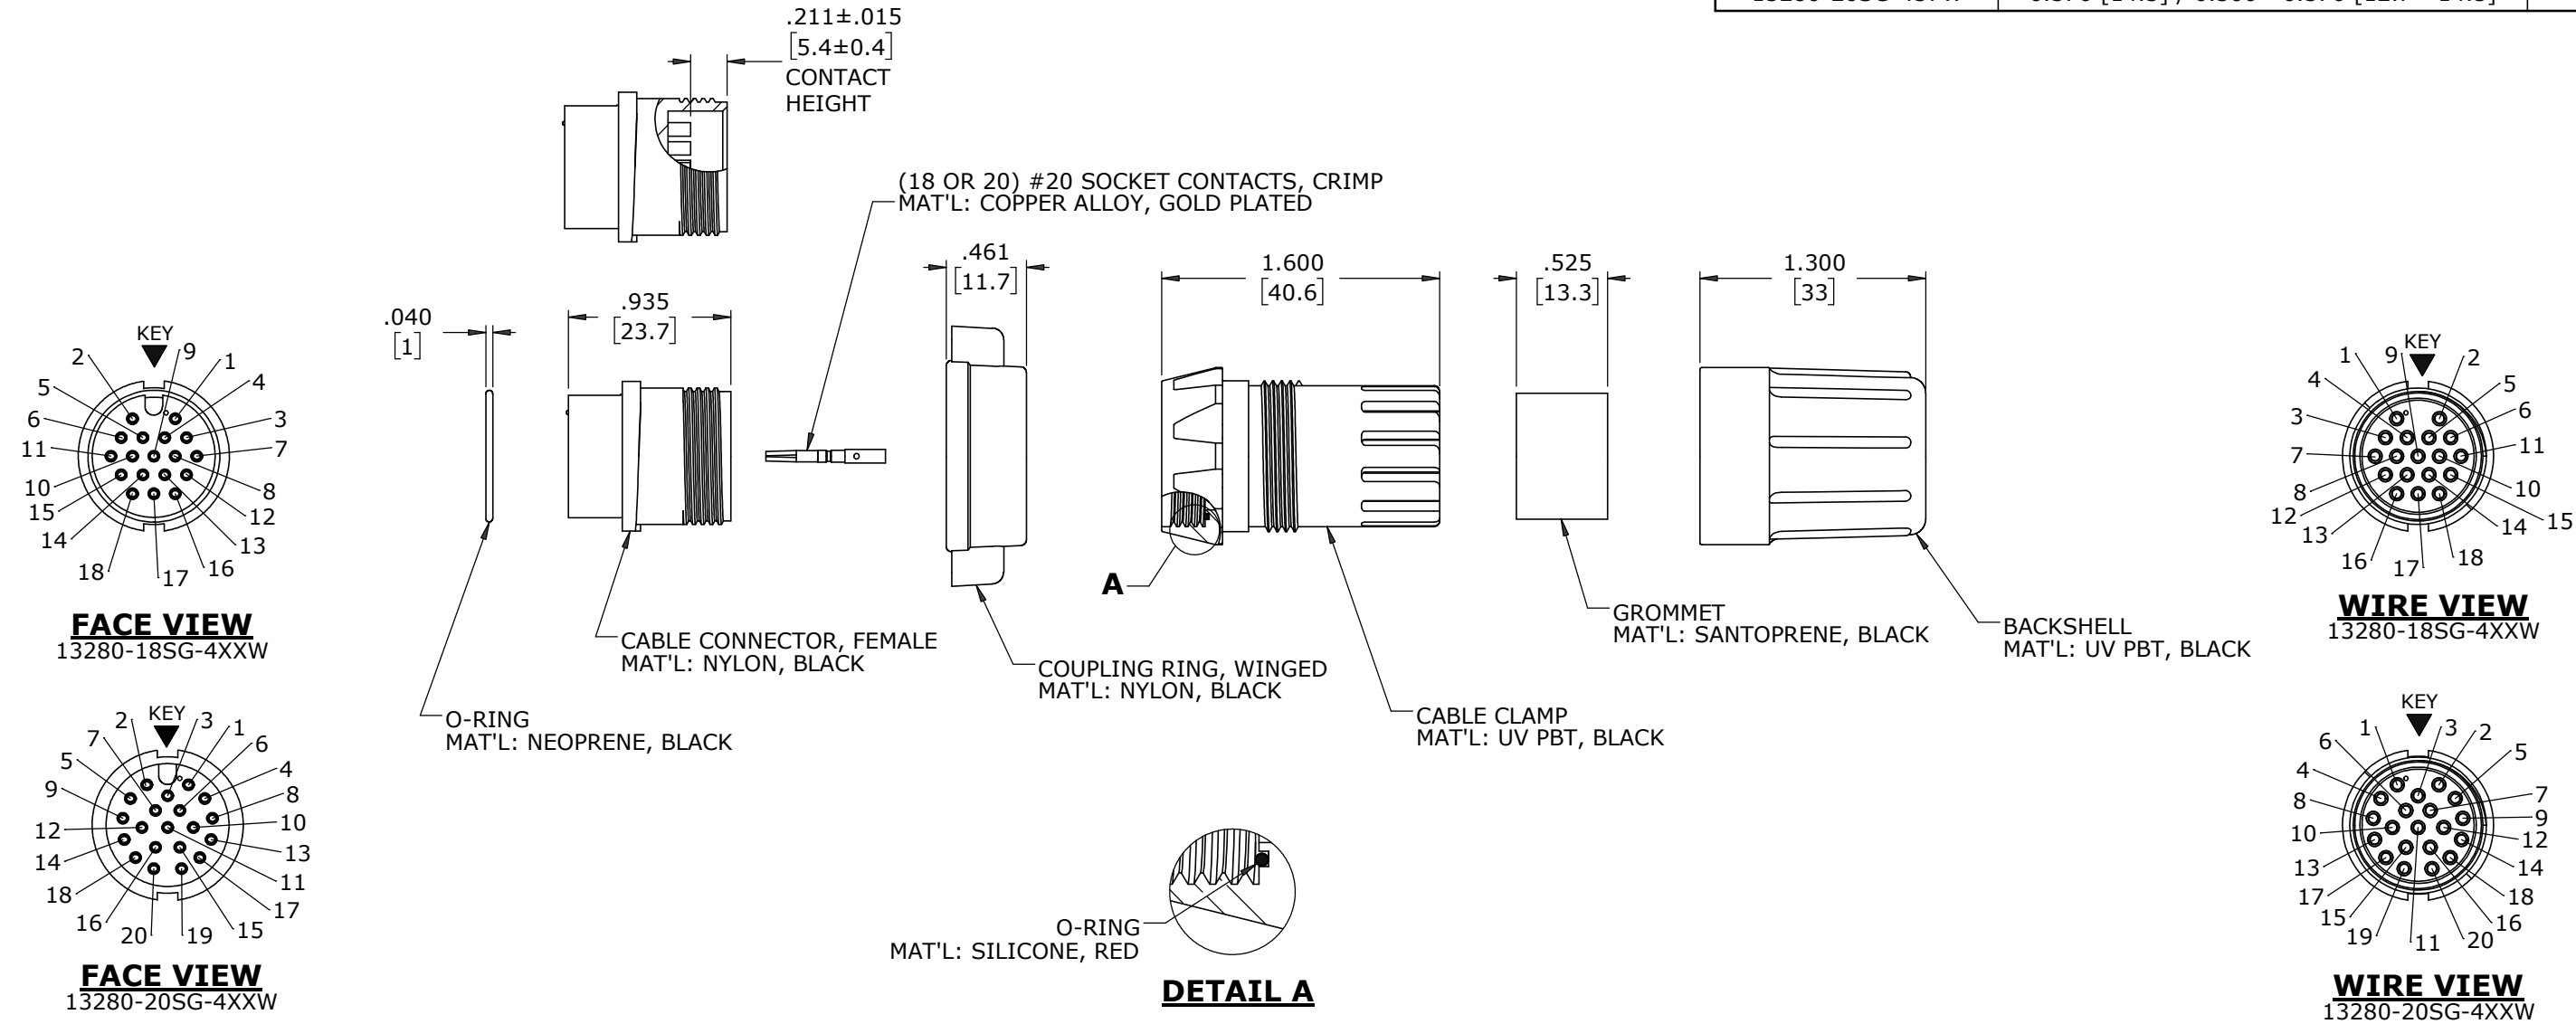

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

A	MA	06-19-24	RELEASED PER PDR 22008-6					
	PNK	12-19-23	PRR# P-22008-6					
REV.	INIT.	DATE	DESCRIPTION					
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK		DATE: 12-19-23			
			CHECKED BY:		conxall 601 E. WILDWOOD VILLA PARK, IL 60181			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:				TITLE: CABLE CONNECTOR ASS'Y (18,20) #20 SOCKET CONTACTS, CRIMP MAXI-CON-X CUSTOMER: STANDARD PRODUCT	
			SCALE NTS					
			SIZE B					
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			SHEET 1 OF 1		PART NUMBER: 13280-XXSG-4XXW			
			FILE: 13280-XXSG-4XXW					
			DIRECTORY: SLW		REV A			

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX