
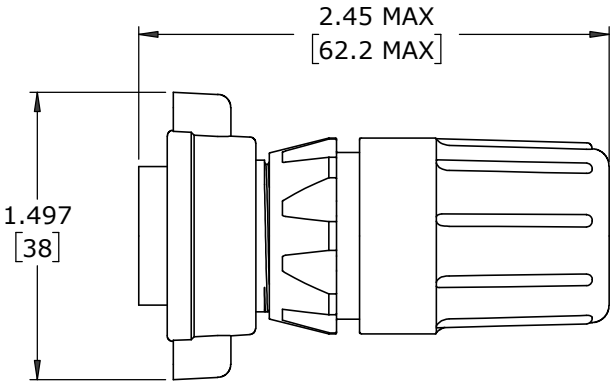



ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
13380-10PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	10 #16
13380-10PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
13380-10PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS SUPPLIED UNASSEMBLED
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE

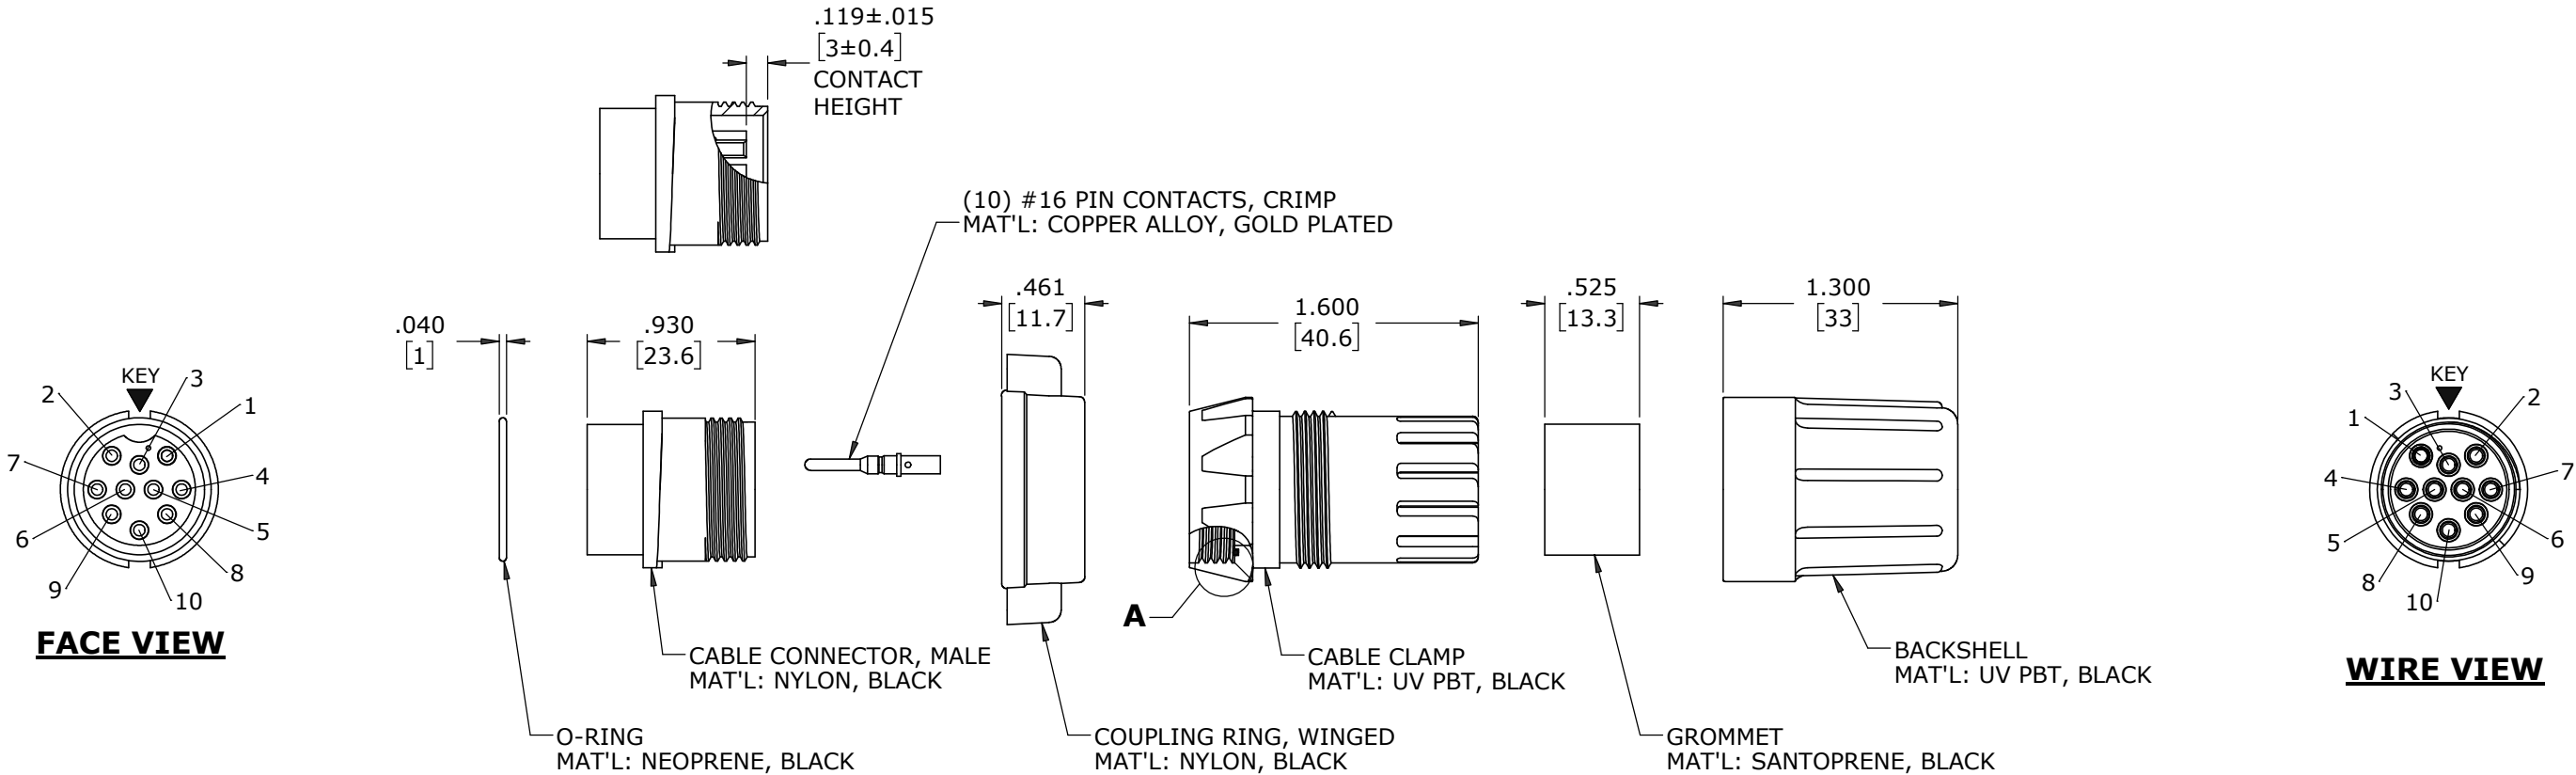

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

A	MA	06-05-24	RELEASED PER PDR 22008-6	
	PNK	12-19-23	PRR# P-22008-6	
REV.	INIT.	DATE	DESCRIPTION	
			ORIG. DRAWN BY: PNK	DATE: 12-19-23
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	
SCALE NTS		SIZE B	SHEET 1 OF 1	TITLE: CABLE CONNECTOR ASS'Y (10) #16 PIN CONTACTS, CRIMP MAXI-CON-X
FILE: 13380-10PG-4XXW		DIRECTORY: SLW	PART NUMBER: 13380-10PG-4XXW	STANDARD PRODUCT
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				REV A