






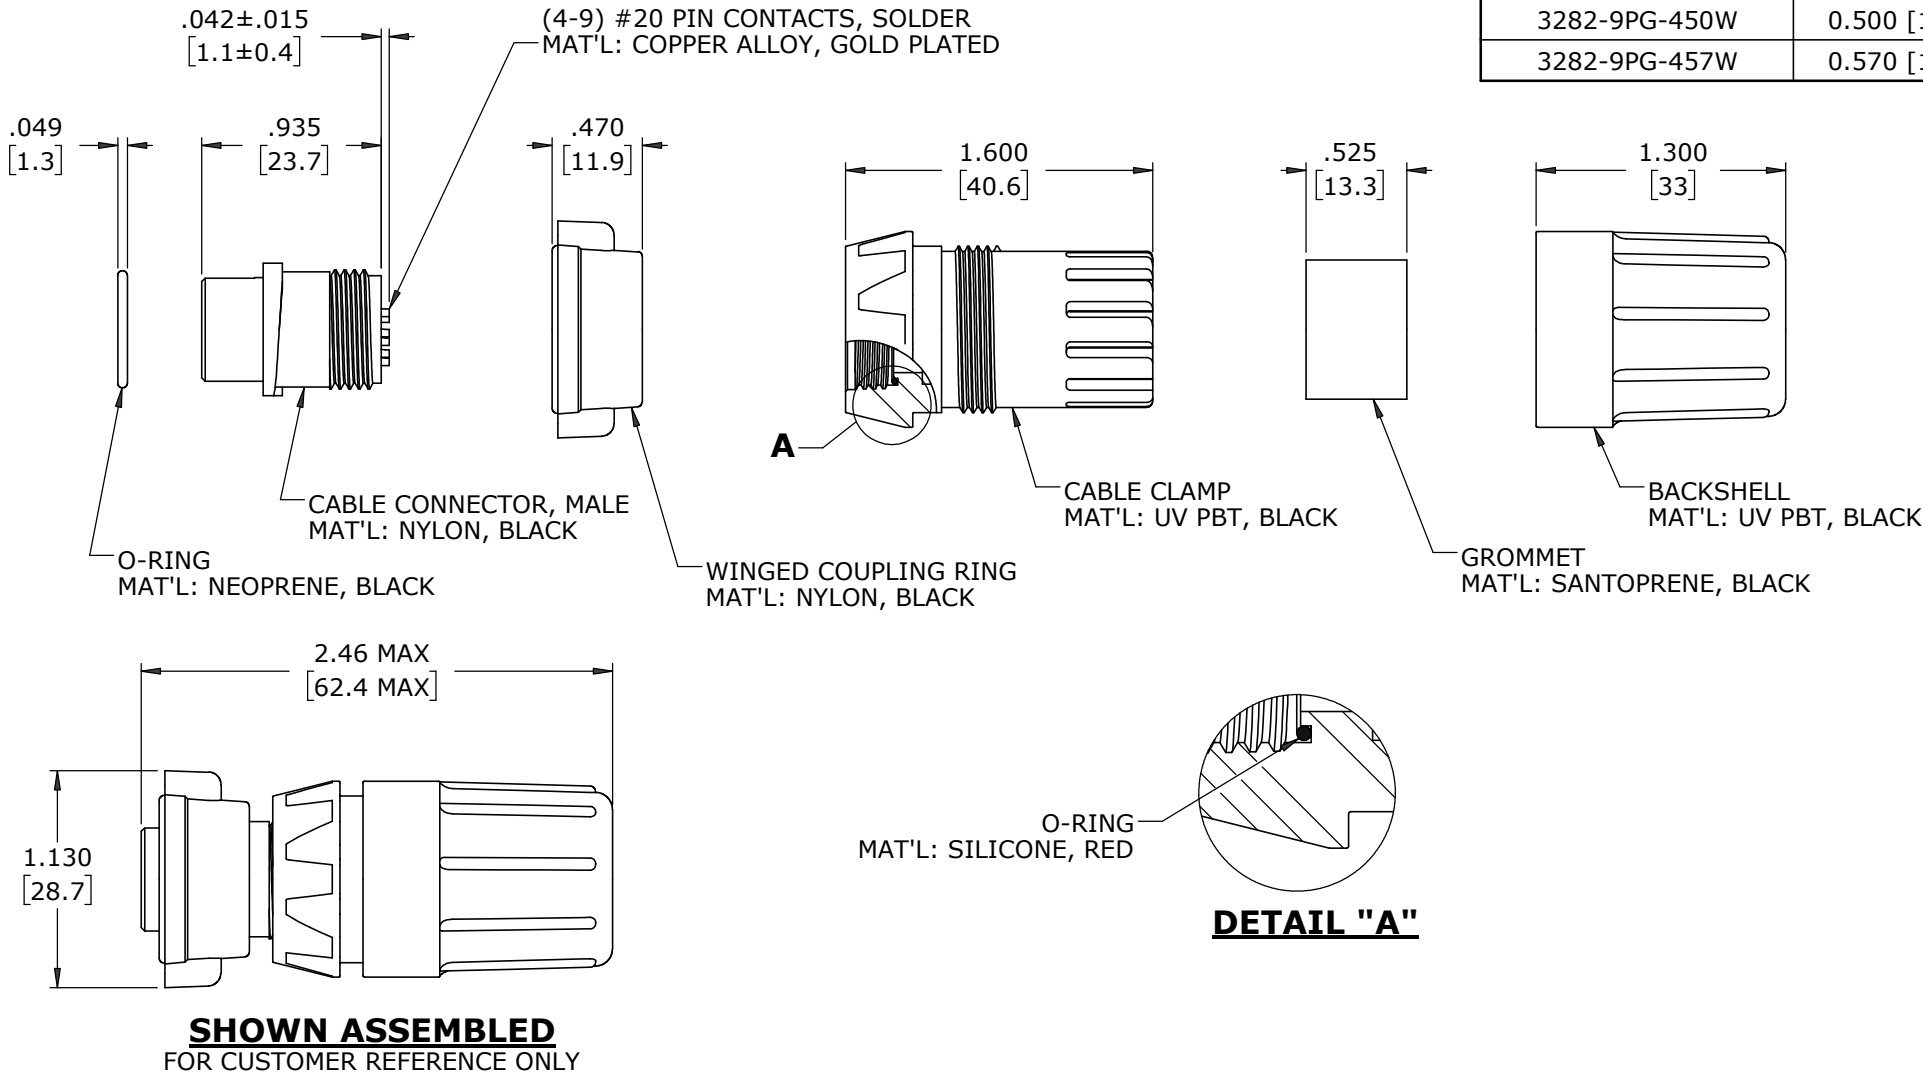







- NOTES:
- 1. ALL PARTS TO BE BULK PACKED.
 - 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 - 3. CONTACTS ASSEMBLED INTO CONNECTOR
 - 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE



ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
3282-4PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
3282-5PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
3282-6PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
3282-6PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-6PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	7 #20
3282-7PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-7PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-7PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	8 #20
3282-8PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-8PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-8PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	9 #20
3282-9PG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-9PG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-9PG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____		DATE: _____	

A	MA	03-26-24	RELEASED PER PDR 22008-3	
	PNK	06-02-23	PRR# P-22008-2	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 06-02-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
			APPROVED BY:	
			SCALE: NTS	
			SIZE: B	
			SHEET: 1 OF 1	
			FILE: 3282-XPG-4XXW	
			DIRECTORY: SLW	
			PART NUMBER: 3282-XPG-4XXW	
			TITLE: CABLE CONNECTOR ASS'Y (4-9) #20 PIN CONTACTS, SOLDER MULTI-CON-X STANDARD PRODUCT	
			REV: A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT