




- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS ASSEMBLED INTO CONNECTOR
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE




FACE VIEW
3282-4SG-4XXW




FACE VIEW
3282-5SG-4XXW




FACE VIEW
3282-6SG-4XXW





FACE VIEW
3282-7SG-4XXW




FACE VIEW
3282-8SG-4XXW




FACE VIEW
3282-9SG-4XXW

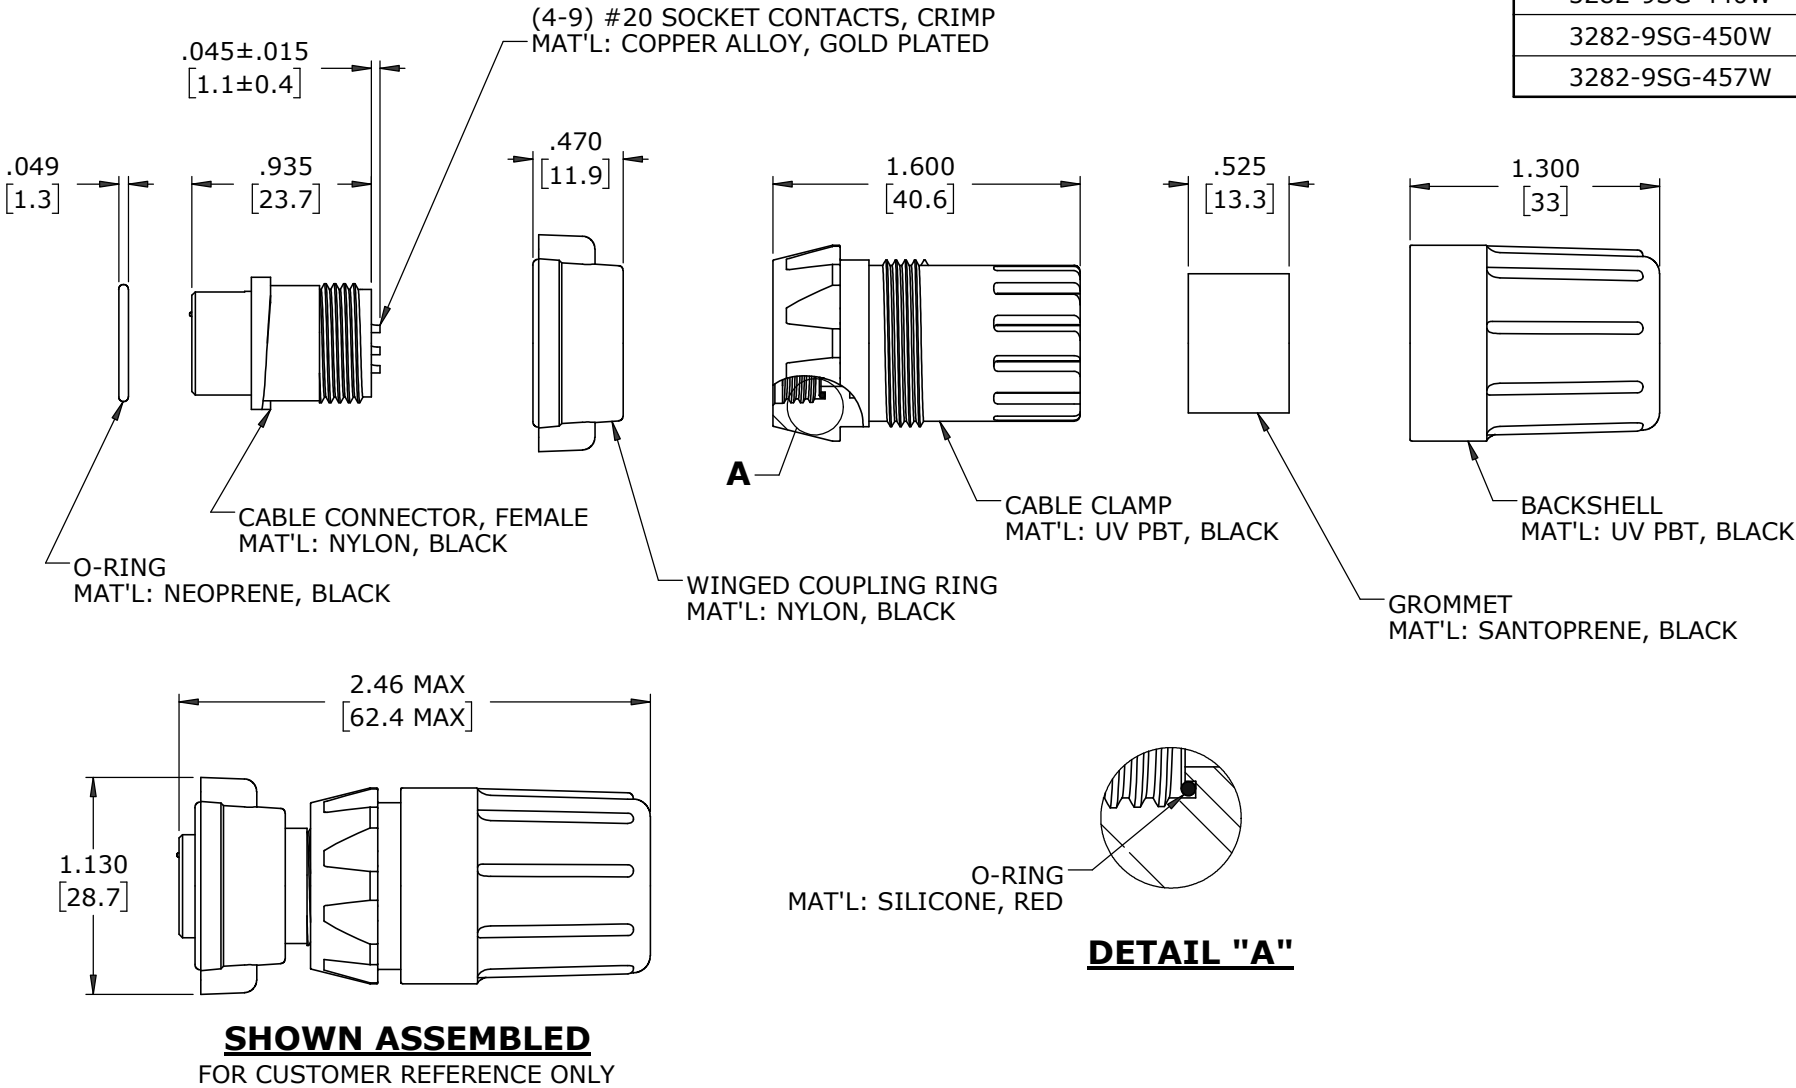


WIRE VIEW
3282-7SG-4XXW




WIRE VIEW
3282-8SG-4XXW




WIRE VIEW
3282-9SG-4XXW



WIRE VIEW
3282-4SG-4XXW



WIRE VIEW
3282-5SG-4XXW



WIRE VIEW
3282-6SG-4XXW

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
3282-4SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
3282-5SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
3282-6SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
3282-6SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-6SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	7 #20
3282-7SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-7SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-7SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	8 #20
3282-8SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-8SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-8SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	9 #20
3282-9SG-440W	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
3282-9SG-450W	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
3282-9SG-457W	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____		DATE: _____	

A	MA	03-26-24	RELEASED PER PDR 22008-3		
	PNK	06-02-23	PRR# P-22008-2		
REV.	INIT.	DATE	DESCRIPTION		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK		DATE: 06-02-23
			CHECKED BY:		 601 E. WILDWOOD VILLA PARK, IL 60181
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		
			SCALE NTS SIZE B SHEET 1 OF 1		CUSTOMER: STANDARD PRODUCT
▷	= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX		FILE: 3282-XSG-4XXW		DIRECTORY: SLW
			PART NUMBER: 3282-XSG-4XXW		REV A

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX