


CUSTOMER PRINT


PART NUMBER: 5182-XPG-4XX

- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS ARE ASSEMBLED INTO CONNECTOR
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE


ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
5182-2PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	2 #12
5182-2PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5182-2PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
5182-3PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	3 #12
5182-3PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5182-3PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
5182-4PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #12
5182-4PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5182-4PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	





FACE VIEW
5182-2PG-4XX




FACE VIEW
5182-3PG-4XX




FACE VIEW
5182-4PG-4XX

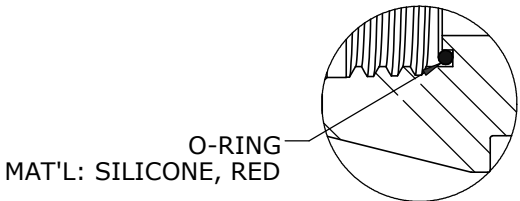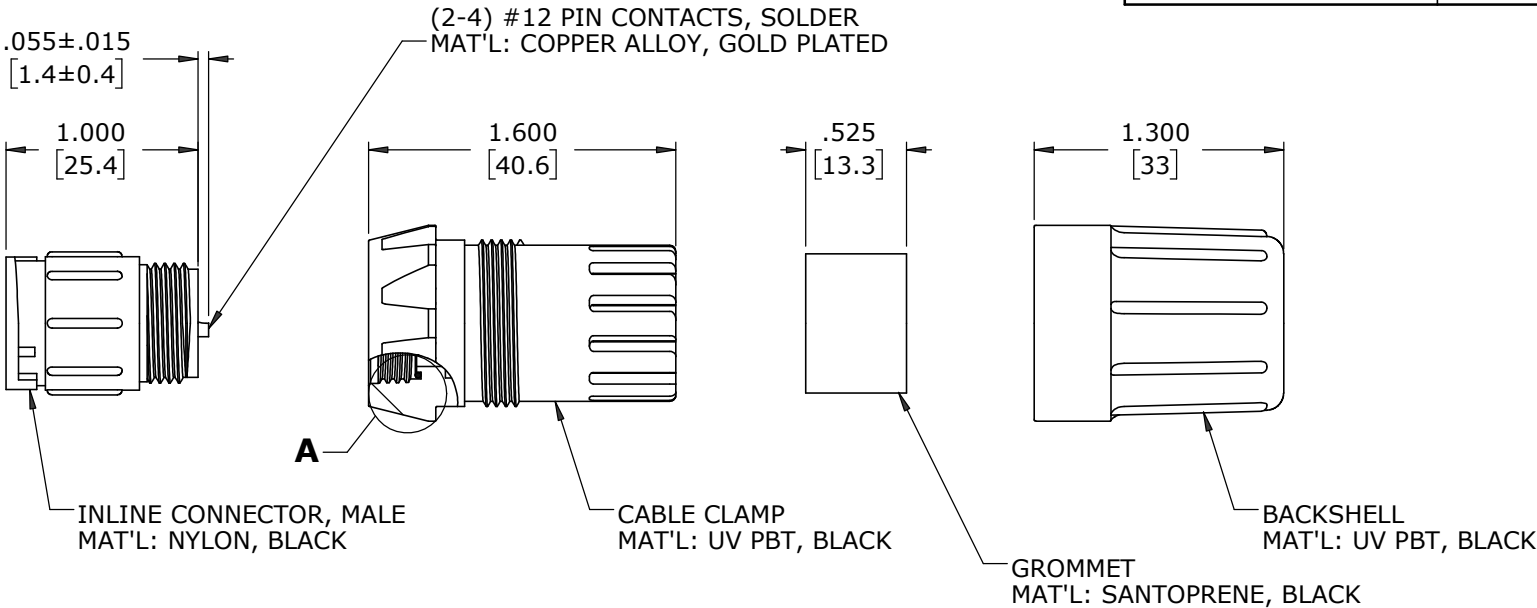


DETAIL A

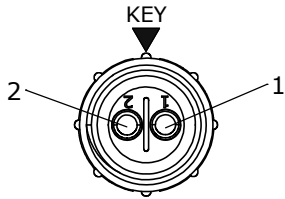


WIRE VIEW
5182-2PG-4XX



WIRE VIEW
5182-3PG-4XX



WIRE VIEW
5182-4PG-4XX

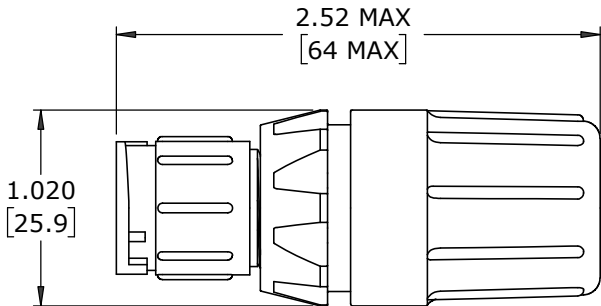

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

A	MA	05-01-24	RELEASED PER PDR 22008-4	
	PNK	05-19-23	PRR# P-22008-4	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 05-19-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
			APPROVED BY:	
			SCALE: NTS	
			SIZE: B	
			SHEET: 1 OF 1	
			FILE: 5182-XPG-4XX	
			DIRECTORY: SLW	
			PART NUMBER: 5182-XPG-4XX	
			TITLE: INLINE CONNECTOR ASS'Y (2-4) #12 PIN CONTACTS, SOLDER MULTI-CON-X STANDARD PRODUCT	
			REV: A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX