
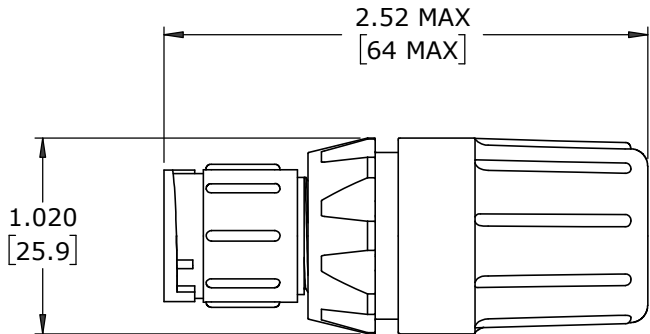








NOTES:








- 1. ALL PARTS TO BE BULK PACKED.
- 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
- 3. CONTACTS SHIPPED UNASSEMBLED
- 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE

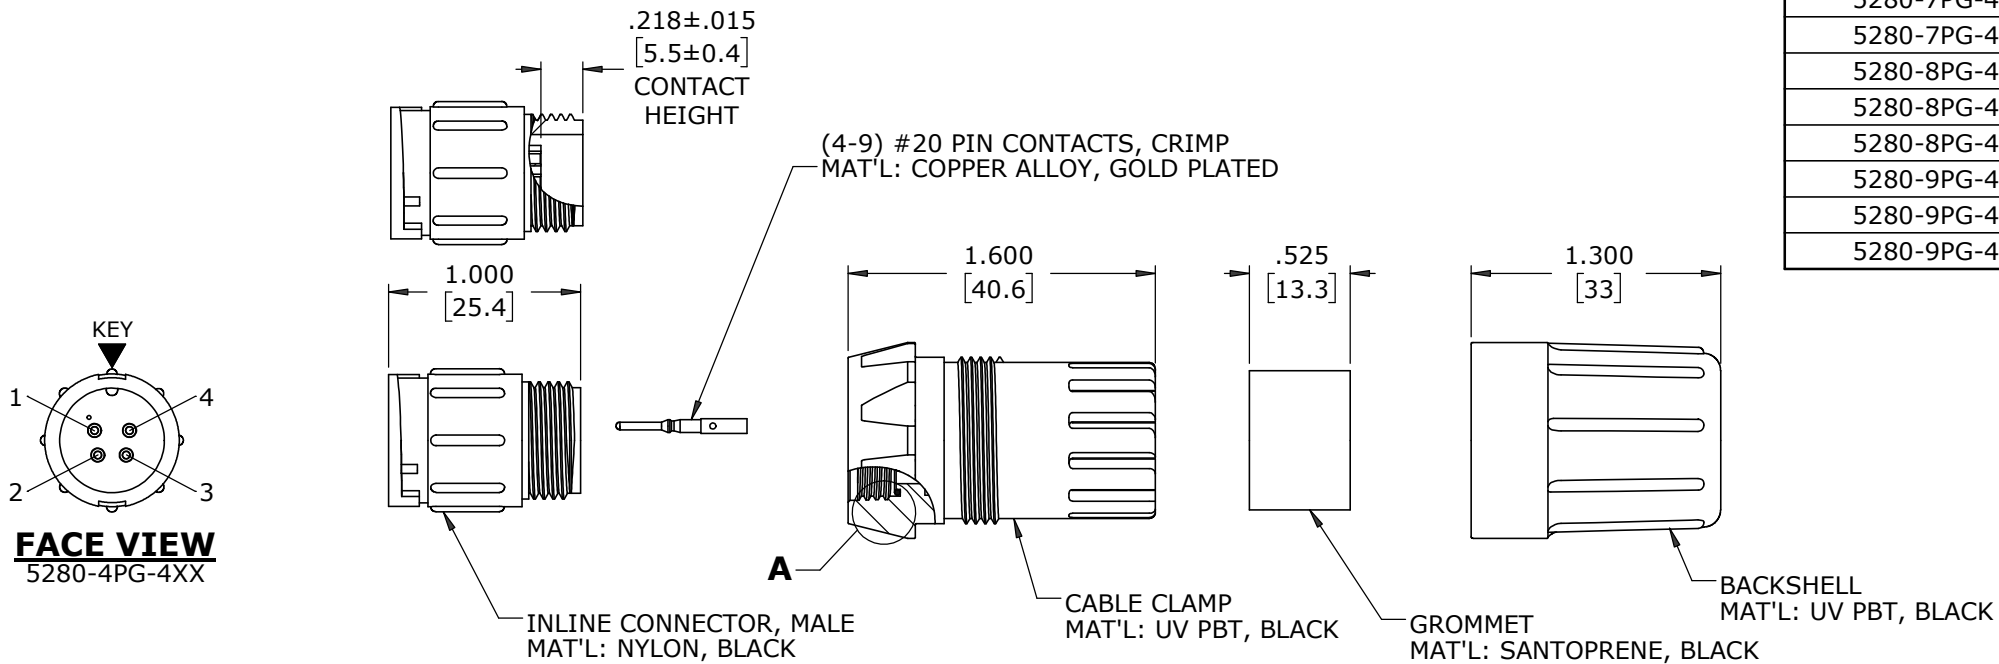

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

DIMENSIONS IN BRACKETS [] ARE METRIC

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
5280-4PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
5280-5PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
5280-6PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
5280-6PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5280-6PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	7 #20
5280-7PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
5280-7PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5280-7PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	8 #20
5280-8PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
5280-8PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5280-8PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	9 #20
5280-9PG-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	
5280-9PG-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
5280-9PG-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	



DETAIL A

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

A	MA	05-08-24	RELEASED PER PDR 22008-5	
	PNK	06-02-23	PRR# P-22008-5	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 06-02-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			APPROVED BY:	
			SCALE NTS	
			SIZE B	
			SHEET 1 OF 1	TITLE: INLINECONNECTOR ASS'Y (4-9) #20 PIN CONTACTS, CRIMP MULTI-CON-X STANDARD PRODUCT
			FILE: 5280-XPG-4XX	
			DIRECTORY: SLW	CUSTOMER: STANDARD PRODUCT
			PART NUMBER: 5280-XPG-4XX	REV A

RoHS COMPLIANT