




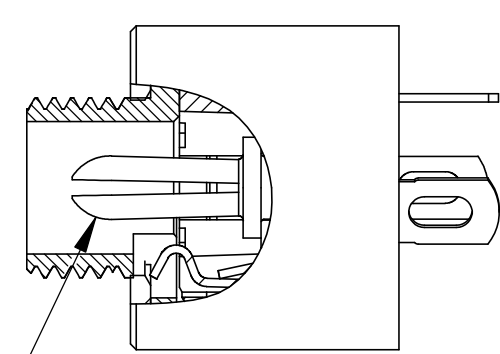


Ø 0.10" (2.5 mm)
CENTER PIN REF

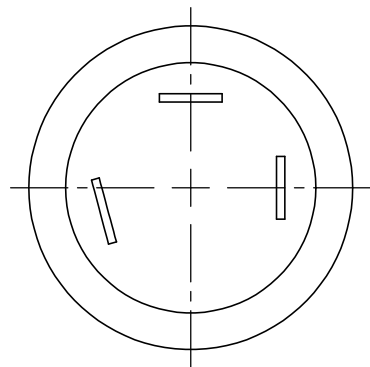


712AHU

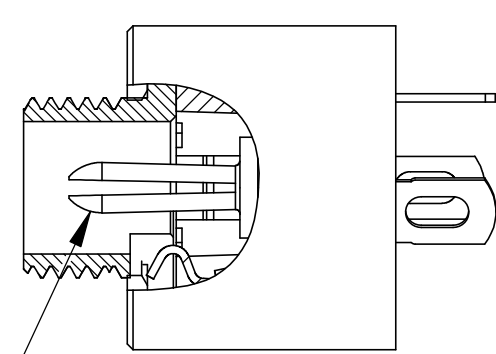


Ø 0.080" (2.0mm)
CENTER PIN REF

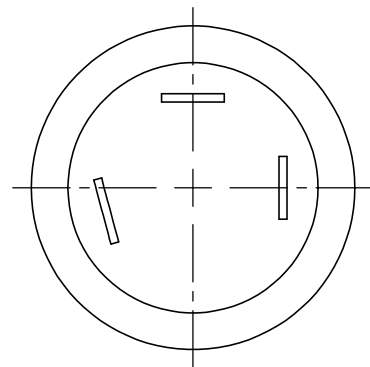





722AHU

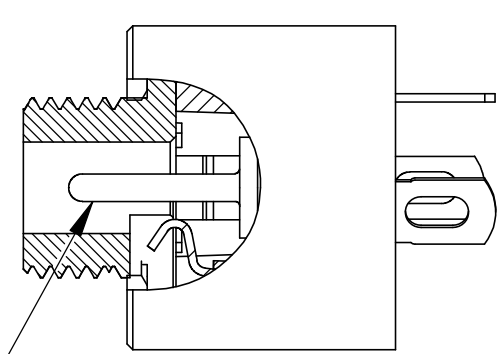

Ø 0.05" (1.3mm)
SOLID CENTER PIN REF


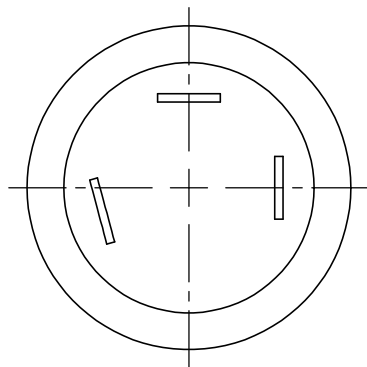


732AHU

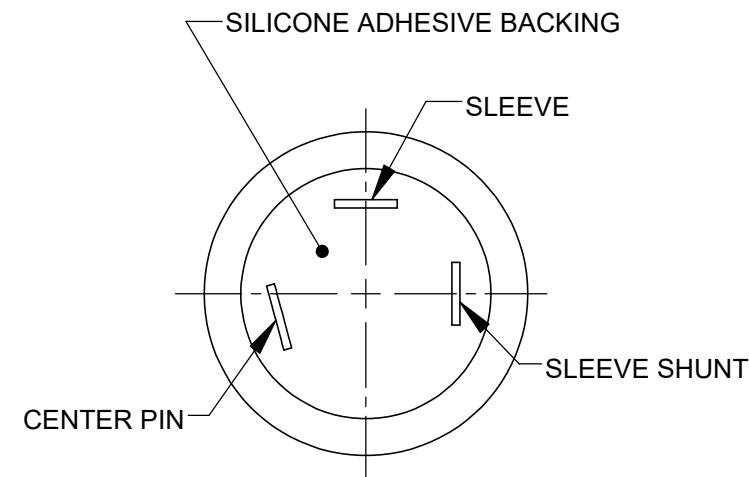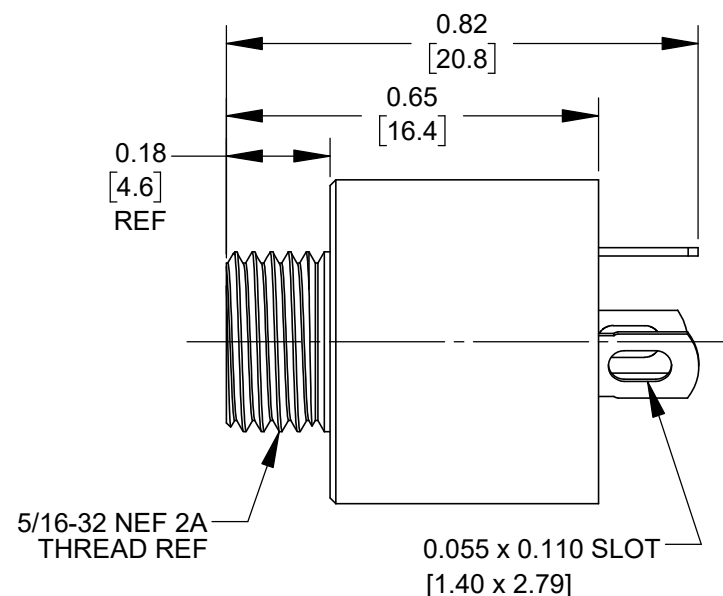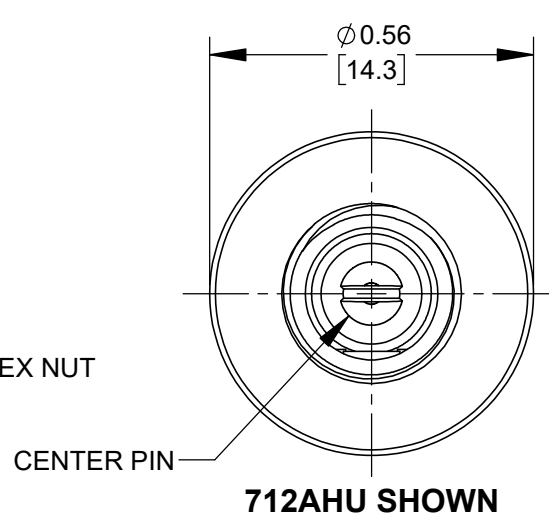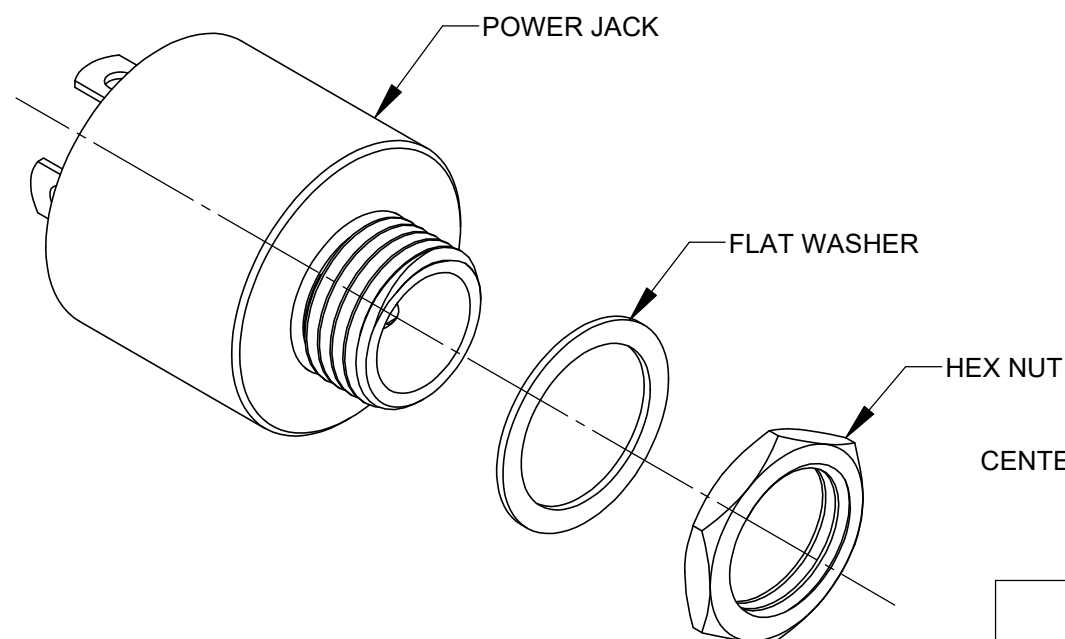

NOTES:

- DIMENSIONS SHOWN FOR REFERENCE ONLY.
- HEX NUT AND FLAT WASHER SUPPLIED UNASSEMBLED.
- MATERIAL:
HOUSING, HEX NUT - COPPER ALLOY, NICKEL PLATED
INSULATOR HOUSING - THERMOPLASTIC, BEIGE
TERMINAL INSULATORS - PHENOLIC
FLAT WASHER - STEEL, NICKEL PLATED
PIN, SPRING, TERMINALS - COPPER ALLOY, SILVER PLATED
SEAL COVER, O-RING - SILICONE, BLACK
POTTING COMPOUND - SILICONE ADHESIVE, LIGHT GRAY
- IT IS RECOMMENDED THAT THE JACK MOUNTING NUT BE TIGHTENED SNUG BY HAND BEFORE APPLYING A FINAL TIGHTENING TORQUE OF 3-4 LB-IN USING HAND TOOLS ONLY. POWER DRIVER OR IMPACT DRIVERS ARE NOT RECOMMENDED.
- THESE PRODUCTS ARE RoHS COMPLIANT

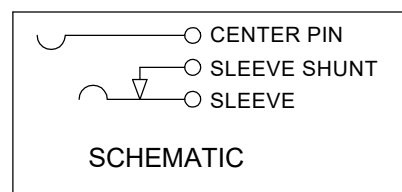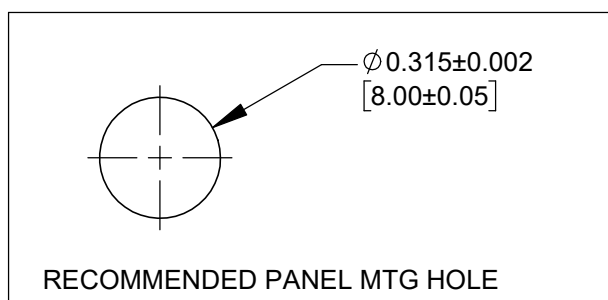

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
A	28689	07/16/24	PC	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED	
1. ALL DIMENSIONS IN INCHES [mm]	
- TWO PLACE DECIMALS ±0.02 [0.5]	
- THREE PLACE DECIMALS ±0.005 [0.13]	
DO NOT SCALE DRAWING	

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.										
SIZE		WIDTH		MULT		LBS/M		TEMPER		
FINISH SPEC No.					MATERIAL SPEC No.					
FIRST USED ON				SCALE 3:1		Switchcraft®				
DATE DRAWN		BY	CHKD		APVD					
5/23/24		PNK	PNK		SRC					
		5/23/24		5/23/24		SHEET 1 OF 1				
NAME POWER JACKS SEALED UNMATED, RoHS					PART No. 712AHU 722AHU 732AHU				REV A	