



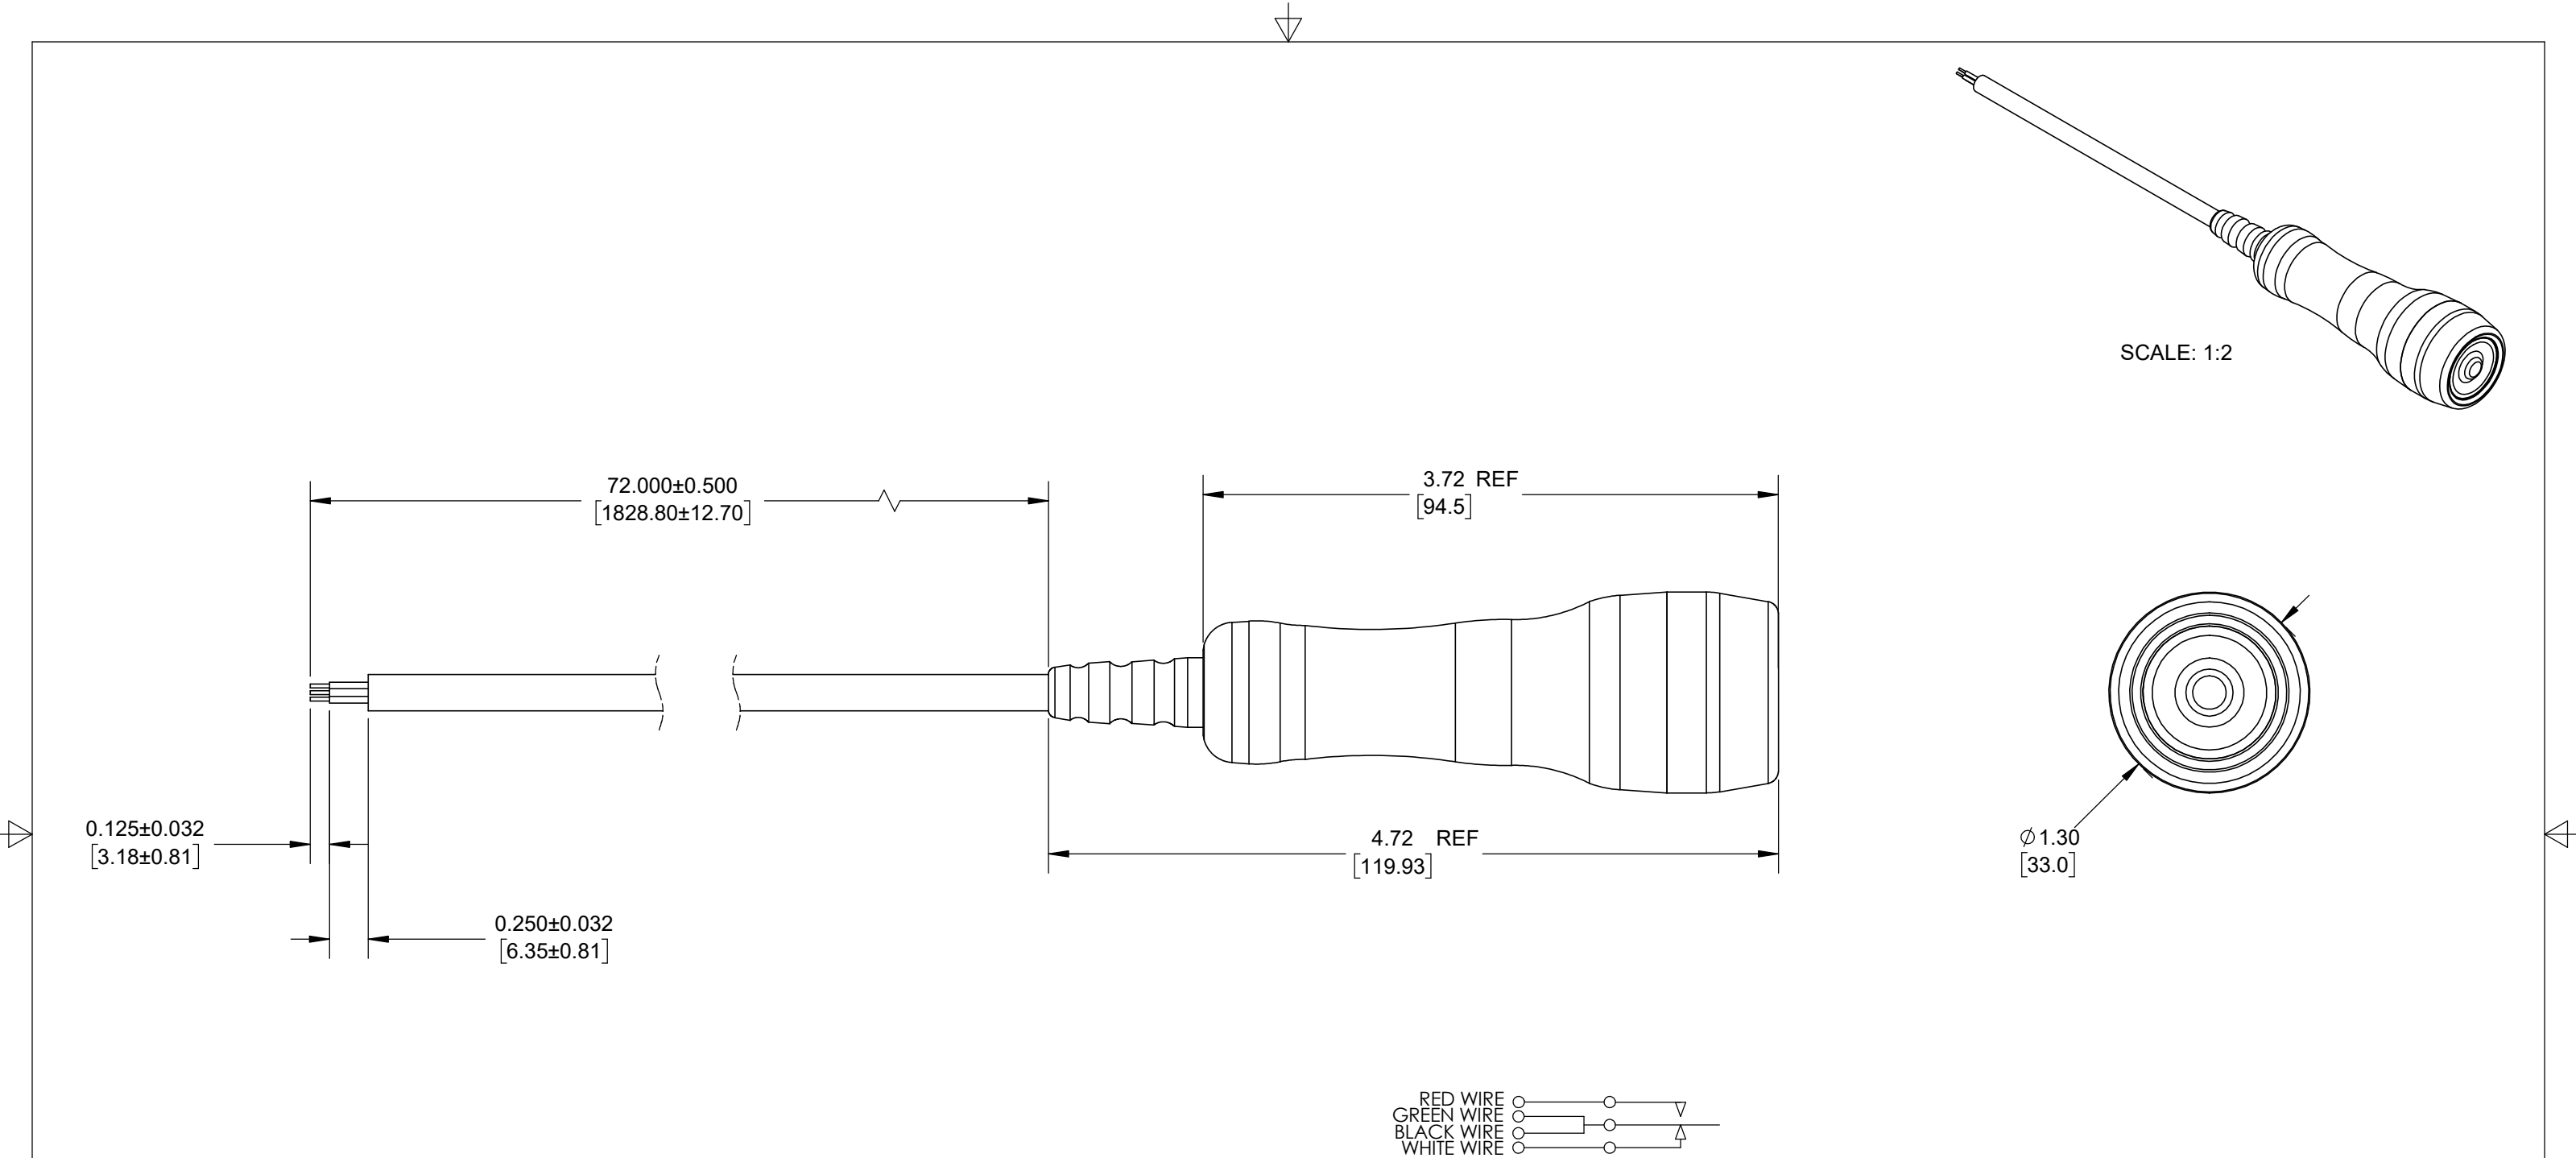

NOTES:

1. SPECIFICATIONS:
SWITCH: SINGLE POLE SUBMINIATURE SNAP SWITCH, 5 A, 125/250 VAC
OPERATING LIFE: 100,000 CYCLES
ACTUATING FORCE: LESS THAN 3 LB
IP68
2. MATERIALS:
HOUSING: GRAY THERMOPLASTIC
ACTUATING BUTTON: GRAY THERMOPLASTIC ALLOY
TERMINALS: SILVER PLATED
STRAIN RELIEF: NATURAL COLORED ELASTOMER
CABLE: 4 CONDUCTOR, 22 AWG, GRAY PVC JACKET
3. THIS PRODUCT IS RoHS COMPLIANT.



SCHEMATIC

CUSTOMER DRAWING

0G	UPDATES PER T.K	5-11-2026	NL		UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES [mm] - TWO PLACE DECIMALS ±0.02 [0.5] - THREE PLACE DECIMALS ±0.005 [0.13]	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
0F	NEW SWITCH AND CABLE	4-7-2026	NL			SIZE *	WIDTH *		MULT *	LBS/M *	TEMPER *				
0E	P-20003-11 MATCH MFG DRAW REV	12-10-2024	SRC	SRC		FINISH *				MATERIAL *					
0D	P-20003-5 MATCH MFG DRAW REV	12-7-2022	SRC	SRC		SPEC No. *				SPEC No. *					
0C	P-20003-3	10-27-2020	SRC	SRC		FIRST USED ON *			SCALE 1:1		Switchcraft®				
0B	P-20003-2	10-26-2020	SRC	SRC		DATE DRAWN	BY	CHKD	APVD						
0A	P-20003-1	10-26-2020	SRC	SRC		10-26-2020	SRC	10-26-2020	12-10-2024						
REV	ECO NUMBER	DATE	BY	APVD		NAME PENDANT CABLE						PART No.		REV	
REVISIONS						DO NOT SCALE DRAWING	SWITCH ASSEMBLY, RoHS						922K		0G