

CUSTOMER PRINT

PART NUMBER: CA16280XSPXXX90

- NOTES:
1. FINISHED CABLE ASSEMBLY TO BE COILED
 2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
 3. ELECTRICAL TEST: 100% CONTINUITY
 4. ALL DIMENSIONS ARE REFERENCE ONLY EXCEPT WHEN NOTED WITH TOLERANCE

ASS'Y P/N	NO. OF POS.
CA162802SPXXX90	2
CA162803SPXXX90	3
CA16280XSPXXX90	


CABLE LENGTH IN "INCHES"

NO OF POSITIONS

ASS'Y P/N	"X" DIM.
CA162802SP03990	3 FT. 3 1/2 IN. ± 2 IN. [1M ±50.8mm]
CA162803SP03990	
CA162802SP07990	6 FT. 7 IN. ± 2 IN. [2M ±50.8mm]
CA162803SP07990	
CA162802SP19790	16 FT. 5 IN. ± 4 IN. [5M ±101.6mm]
CA162803SP19790	
CA162802SP39490	32 FT. 9 3/4 IN. ± 8 IN. [10M ±203.2mm]
CA162803SP39490	
CA16280XSPXXX90	


CABLE LENGTH IN "INCHES"

NO OF POSITIONS

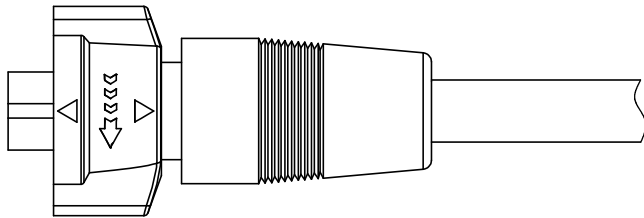

TOP VIEW


O-RING
MAT'L: SILICONE, RED

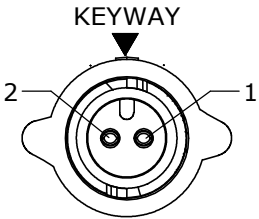

END "A"

FACE VIEW


CA162802SPXXX90




END "A"

FACE VIEW

CA162803SPXXX90

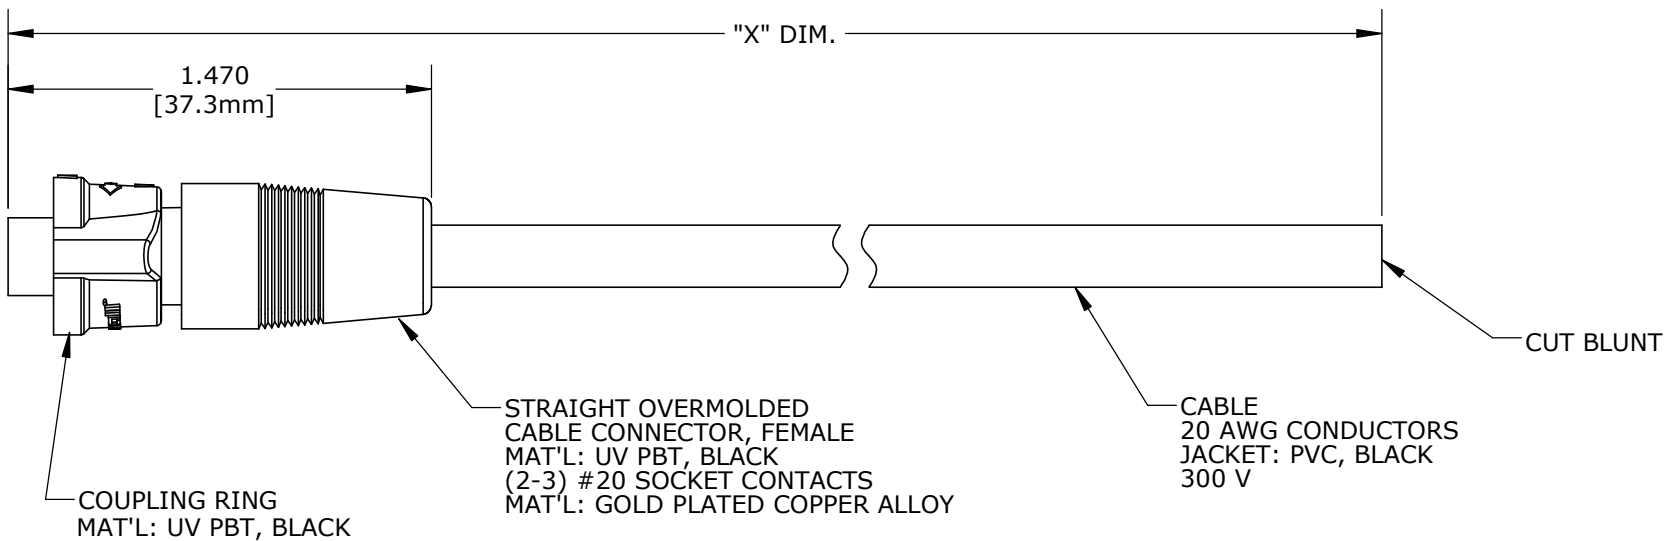

ARROW AND KEYWAY ALIGNED

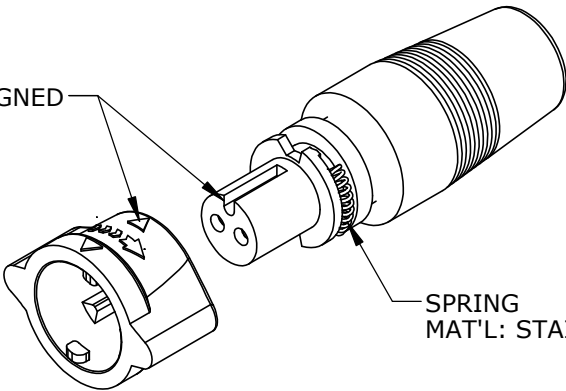

SPRING
MAT'L: STAINLESS STEEL

DIMENSIONS IN BRACKET [] ARE METRIC.


CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

RoHS COMPLIANT

A	AN	06-01-21	DRAWING CREATED PER DOR 21-109360DS		
REV.	INIT.	DATE	DESCRIPTION		
	AN	06-01-21	ORIG. DRAWN BY: AN CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			APPROVED BY:	TITLE: CABLE ASSEMBLY (2-3) #20 SOCKET CONTACTS INSTA-CLICK™ MICRO-CON-X STANDARD PRODUCT	
			SCALE: NTS SIZE: B SHEET: 1 OF 1	CUSTOMER: CA16280XSPXXX90	
			FILE: CA16280XSPXXX90 DIRECTORY: SLW	PART NUMBER: CA16280XSPXXX90	
					REV A