

CUSTOMER PRINT


PART NUMBER: CARA6A808PPXXX90

NOTES:

1. FINISHED PRODUCT TO BE COILED
2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CARA6A808PP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CARA6A808PP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CARA6A808PP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CARA6A808PP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CARA6A808PPXXX90	

CABLE CUT LENGTH IN "INCHES"

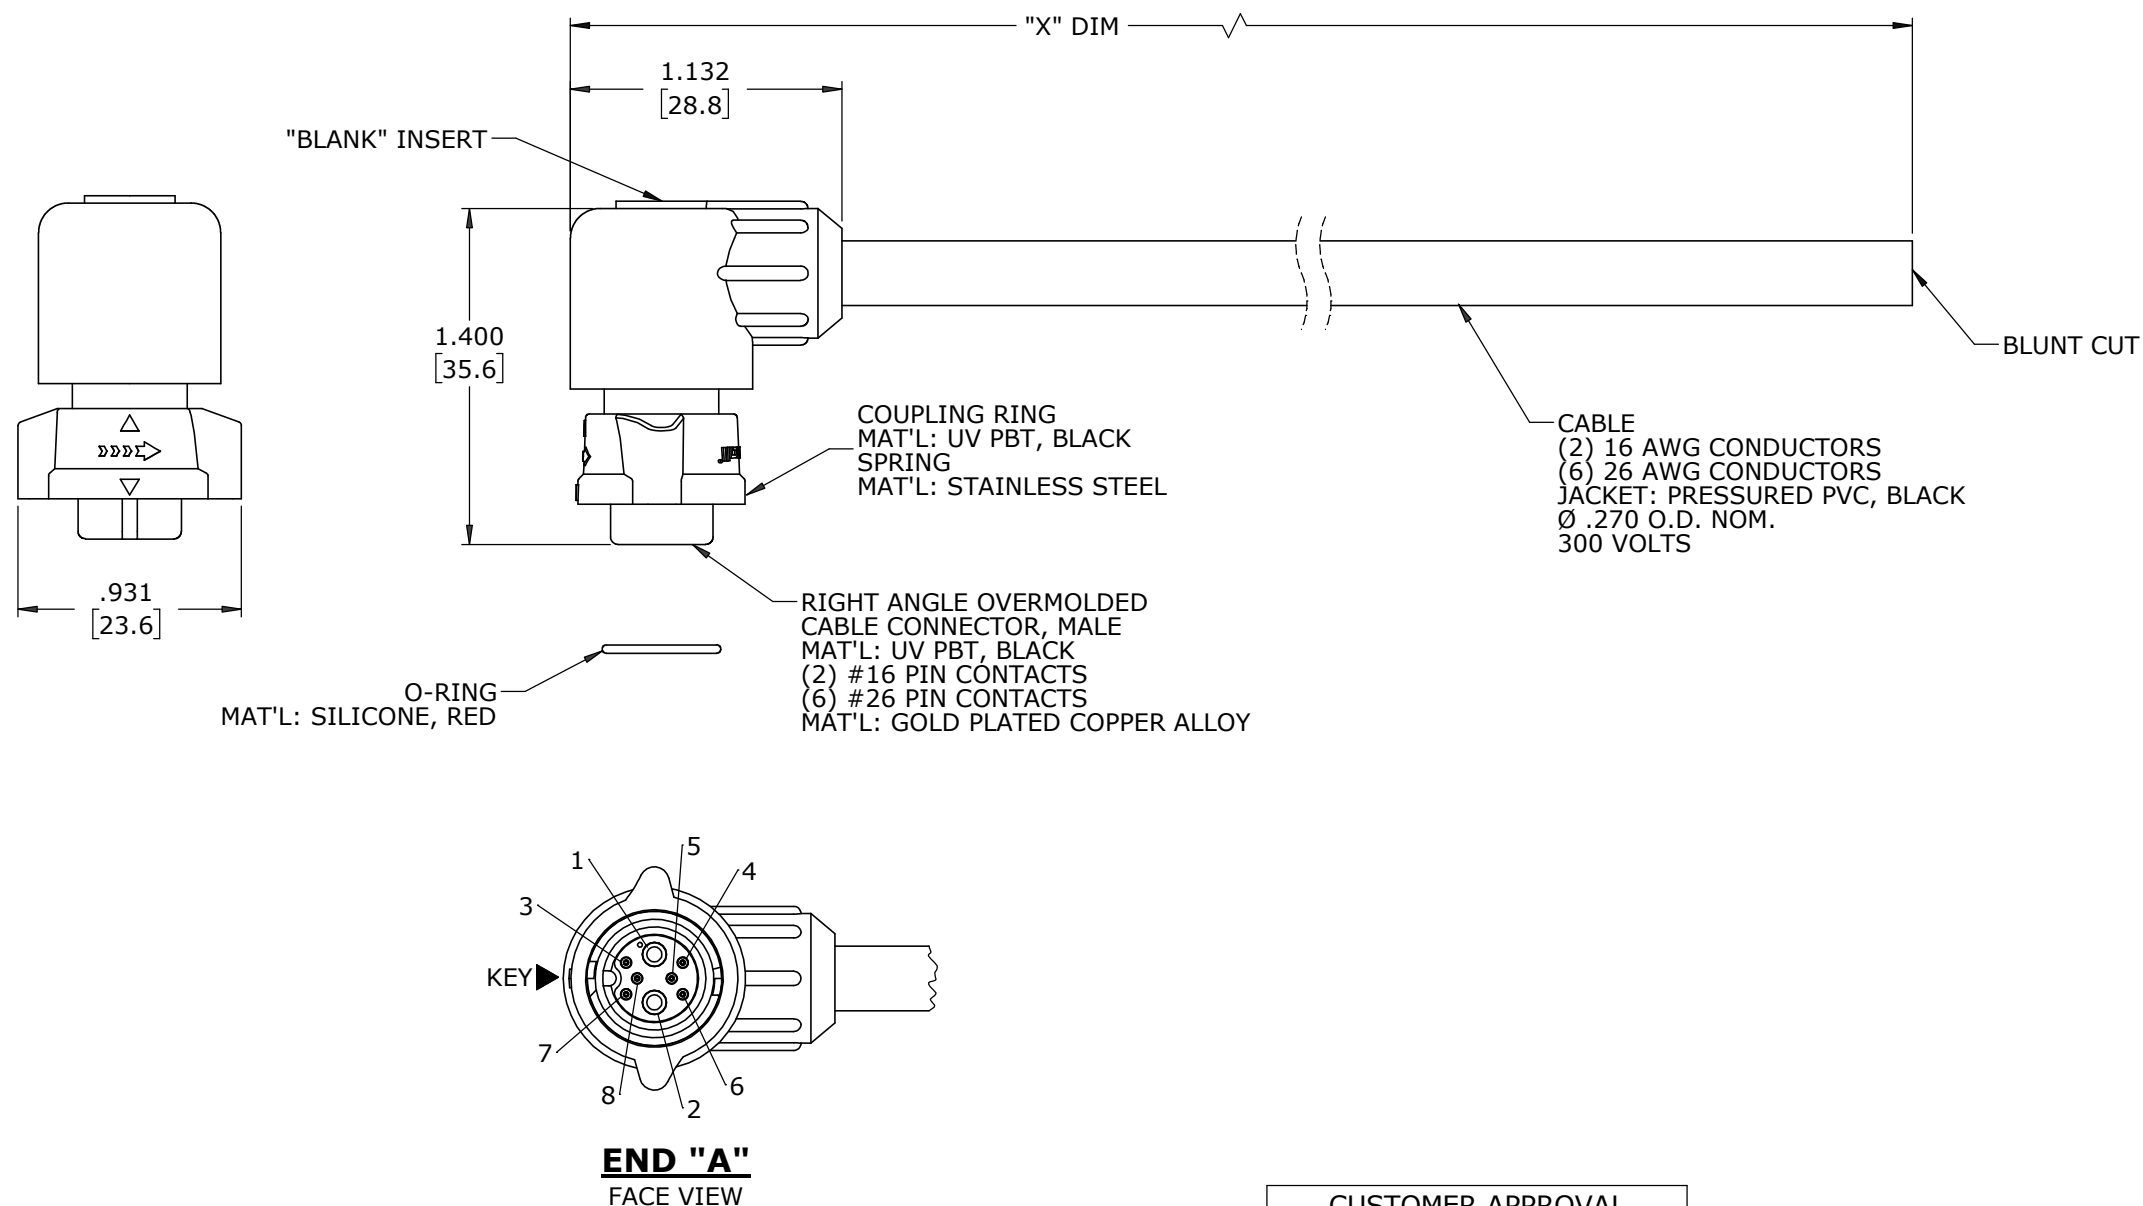

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

WIRE COLOR CODE							
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS. 8
BLK	WHT	BRN	RED	YEL	GRN	GRY	BLU
16 AWG	16 AWG	26 AWG	26 AWG	26 AWG	26 AWG	26 AWG	26 AWG

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	08-12-21	DRAWING CREATED PER DOR 21-109361DS-1				
REV.	INIT.	DATE	DESCRIPTION				
	MA	08-12-21	<small>ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.</small>				
APPROVED BY:			<small>ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.</small>				
<small>SCALE: NTS</small>			<small>SIZE: B</small>		<small>SHEET: 1 OF 1</small>		<small>TITLE: CABLE ASSEMBLY, RA 2#16/6#26 PIN CONTACTS INSTA-CLICK™ MINI-CON-X MIX SIG BULLET</small>
<small>FILE: CARA6A808PPXXX90</small>			<small>DIRECTORY: SLW</small>		<small>PART NUMBER: CARA6A808PPXXX90</small>		<small>REV: A</small>