


CUSTOMER PRINT

CARA6A808PXXX90

PART NUMBER:

- FINISHED PRODUCT TO BE COILED
 OVERMOLD BOOT MATERIAL: PVC, BLACK
 ELECTRICAL TEST: 100% CONTINUITY
 ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

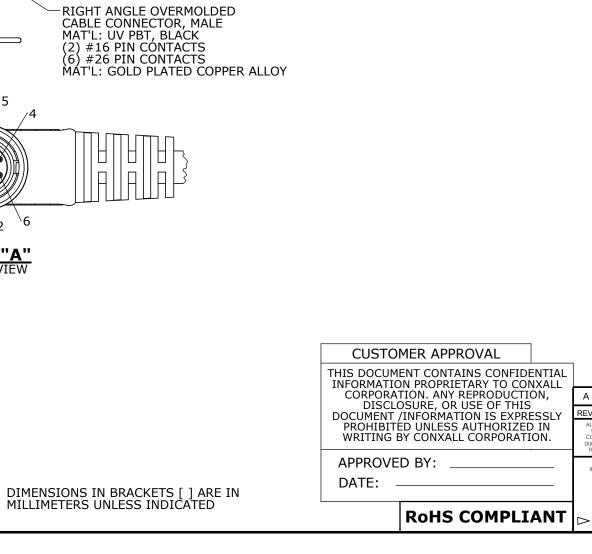

"X" DIM

1.895 [48.1]

(conxall

[\]6 12

END "A" FACE VIEW

-

1.510 [38.4]

KEY

O-RING⁻ MAT'L: SILICONE, RED

Н

H

Π

A


П


COUPLING RING -MAT'L: UV PBT, BLACK

WIRE COLOR CODE								
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6	POS. 7	POS .8	
BLK	WHT	BRN	RED	YEL	GRN	GRY	BLU	
16 AWG	16 AWG	26 AWG						

ASS'Y P/N	"X" DIM			
CARA6A808P03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]			
CARA6A808P07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]			
CARA6A808P19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]			
CARA6A808P39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]			
CARA6A808P <u>XXX</u> 90				

CABLE CUT LENGTH IN "INCHES"





CABLE

A	MA	07-13-21	DRAWIN	DRAWING CREATED PER DOR 21-109361DS							
EV.	INIT.	DATE	DESCRIP	TION							
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: DATE: MA 07-13-21								
			CHECKED BY:			GONZSU					
ALL UNITS ARE IN FEET. INCHES, FRACTION OF INCHES AND DECIMALS.						601 E. WILDWOOD VILLA PARK, IL 60181					
			APPROVED BY:			TITLE: CABLE ASSEMBLY, RA 2#16/6#26 PIN CONTACTS					
			scale NTS	size B	sheet 1 OF 1	MIN-CON-X MIXED SIGNAL FLEX OM customer: STANDARD PRODUCT					
			FILE: CARA6A808PXXX90		DIRECTORY: 0 SLW	PART NUMBER: CARA6A808PXXX90	REV A				