


CENTER PIN
SLEEVE SHUNT
SLEEVE
SCHEMATIC

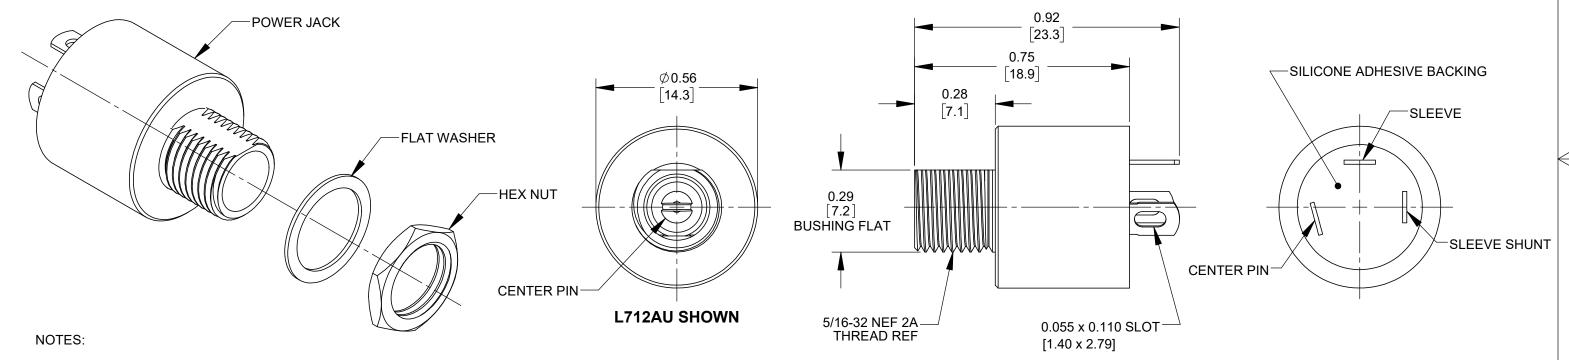

1. DIMENSIONS SHOWN FOR REFERENCE ONLY.

 \rightarrow

- 2. HEX NUT AND FLAT WASHER SUPPLIED UNASSEMBLED.
- 3. MATERIAL:
 HOUSING, HEX NUT COPPER ALLOY, NICKEL PLATED
 INSULATOR HOUSING THERMOPLASTIC, BLACK
 TERMINAL INSULATORS PHENOLIC
 FLAT WASHER STEEL, NICKEL PLATED
 PIN, SPRING, TERMINALS COPPER ALLOY, SILVER PLATED
 SEAL COVER, O-RING SILICONE, BLACK
 POTTING COMPOUND SILICONE ADHESIVE, LIGHT GRAY
- 4. IT IS RECOMMENDED THAT THE JACK MOUNTING NUT BE TIGHTENED SNUG BY HAND BEFORE APPLYING A FINAL TIGHTENING TORQUE OF 3-4 LB-IN USING HAND TOOLS ONLY. POWER DRIVER OR IMPACT DRIVERS ARE NOT RECOMMENDED.
- 5. THESE PRODUCTS ARE RoHS COMPLIANT

CUSTOMER DRAWING

_																
										OPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED FIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
						UNLESS OTHERWISE SPECIFIED	SIZE	W	IDTH MULT			LBS/M		TEMPER		
						1. ALL DIMENSIONS IN INCHES [mm]	FINISH				MATERIAL					
						- TWO PLACE DECIMALS ±0.02 [0.5]	SPEC No.				SPEC No.					
İ						- THREE PLACE DECIMALS ±0.005 [0.13]	FIRST USED ON		١	SCALE 3:1					n GD®	¨
							DATE DRAWN	BY	CHKD	APVD						
H		20000	07/40/04				5/23/24	PNK	PNK	SRC						
-	Α	28689	07/16/24	PC	TJK		3/23/24		5/23/24	5/23/24		SHEET	1	OF	1	
	REV	ECO NUMBER	DATE	BY	APVD		NAME POWER JACKS			3	PART No				RI	EV
	REVISIONS					DO NOT SCALE DRAWING	SEALED UNMATED, RoHS				L712AU L722AU A					