
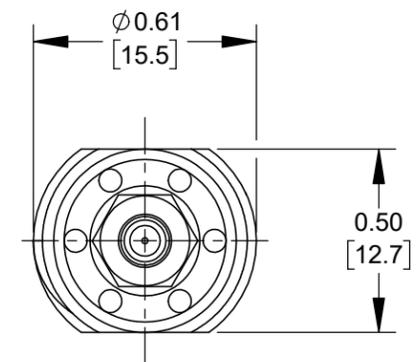
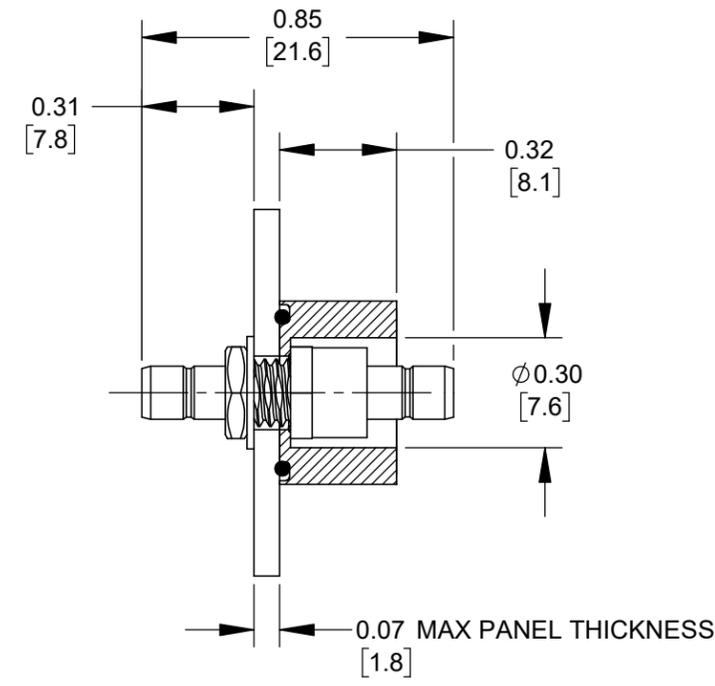


**NOTES:**

- COMPONENTS SUPPLIED UNASSEMBLED.
- ASSEMBLE AND INSTALL AS SHOWN.  
PANEL MOUNTING TORQUE: 5 - 6 IN-LBS.
- MATERIAL AND FINISH:  
CENTER CONTACT - BRASS, 50 MICRO-INCHES MIN. GOLD  
BODY & HARDWARE - BRASS, 3 MICRO-INCHES MIN. GOLD  
INSULATOR - PTFE, NATURAL  
O-RING - SILICONE, BLACK
- ELECTRICAL SPECIFICATIONS:  
IMPEDANCE: 50 OHM  
VSWR: 1.25 MAX @ DC-18 GHZ  
DIELECTRIC WITHSTAND VOLTAGE: 1000 VRMS  
CENTER CONTACT RESISTANCE: 6 mOMH MAX  
OUTER CONTACT RESISTANCE: 2.5 mOHM MAX  
INSULATION RESISTANCE: 1000 mOHM
- THIS PRODUCT IS RoHS COMPLIANT.

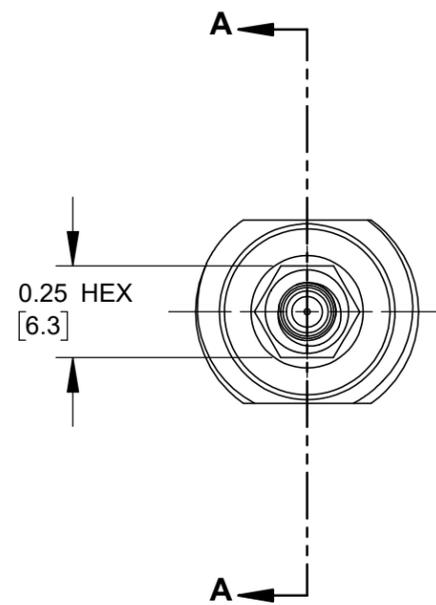

**CUSTOMER DRAWING**

REV	ECO NUMBER	DATE	BY	APVD
A	28773	10-23-25	PC	TJK
REVISIONS				

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES [mm]  
 - TWO PLACE DECIMALS ±0.02 [0.5]  
 - THREE PLACE DECIMALS ±0.005 [0.13]

**DO NOT SCALE DRAWING**

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE		WIDTH		MULT		LBS/M		TEMPER	
FINISH SPEC No.						MATERIAL SPEC No.			
FIRST USED ON SEALED SMB				SCALE 2:1		<b>Switchcraft</b> <sup>®</sup>			
DATE DRAWN	BY	CHKD	APVD						
2-26-2024	SRC	SRC	SRC	2-26-2024	2-26-2024	SHEET 1 OF 1			
NAME SEALED SMB PANEL FEED-THRU						PART No. RCPSMBT		REV A	