

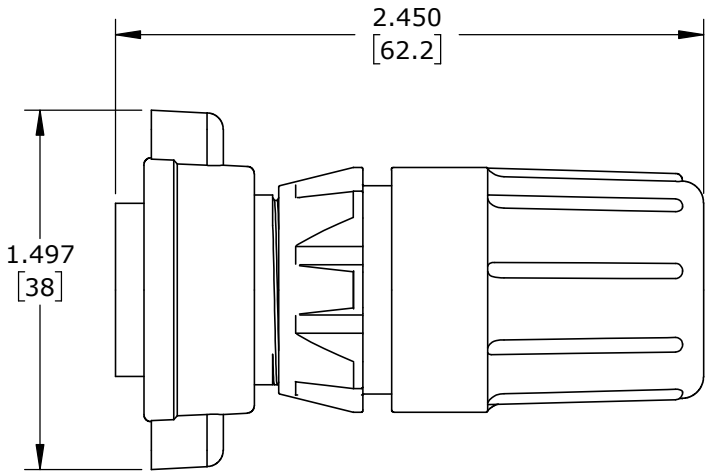
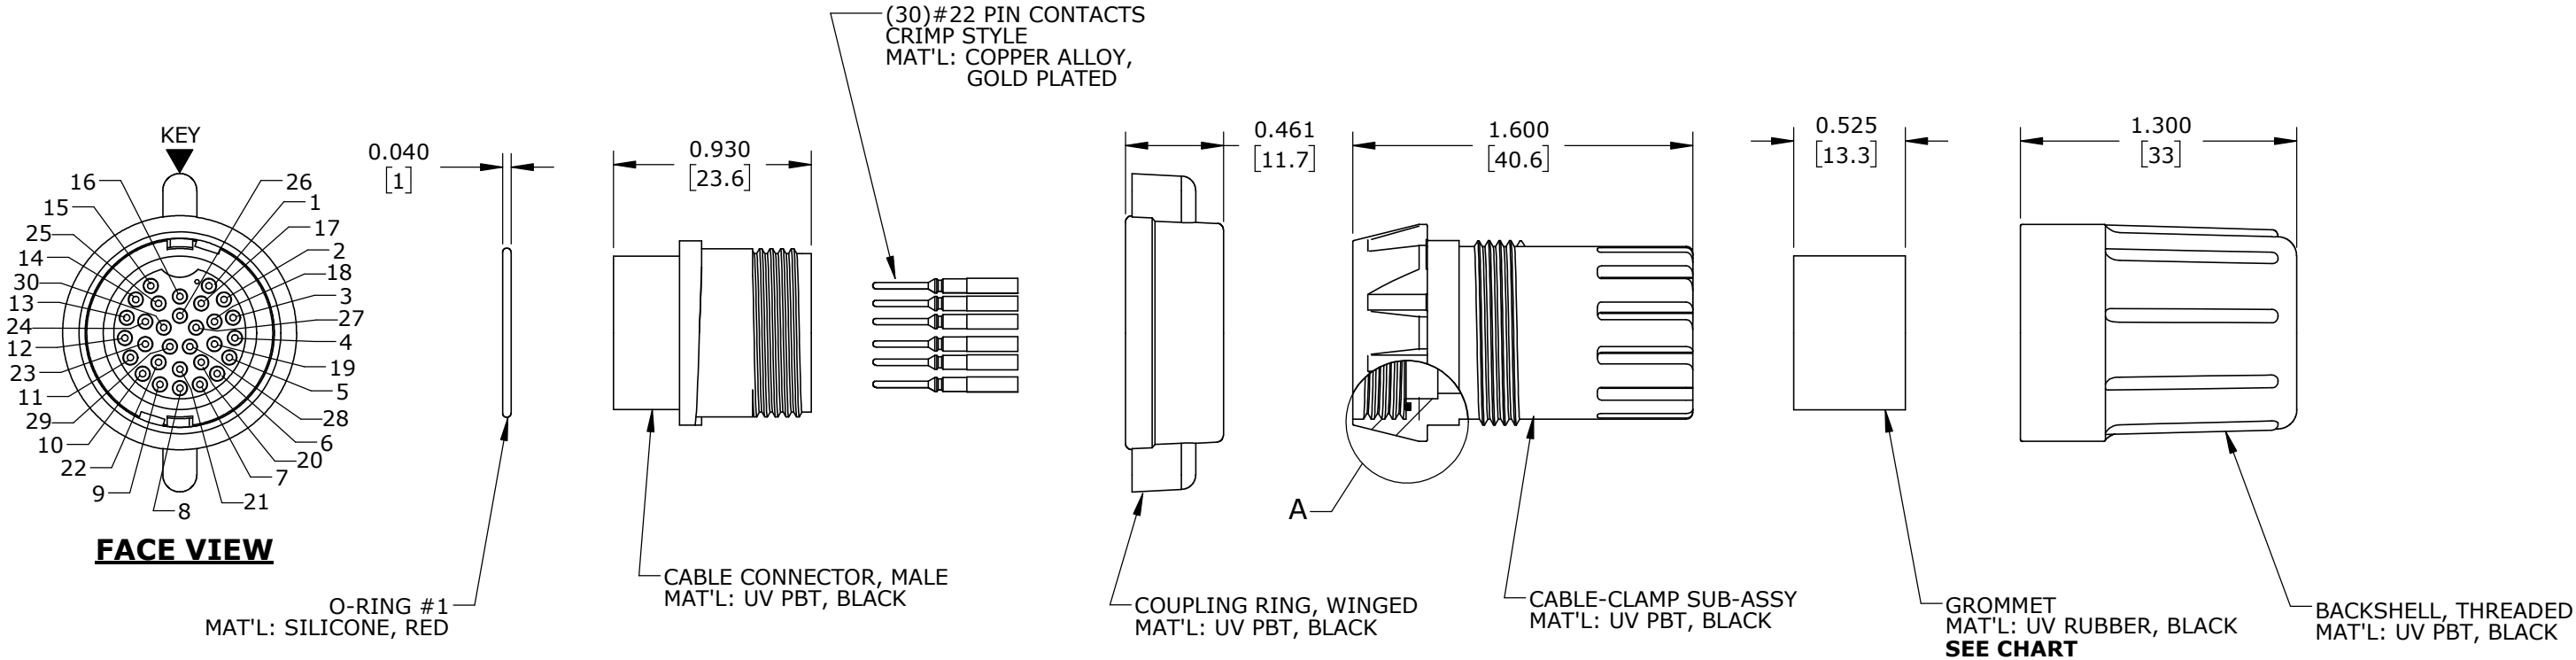


- NOTES:
- 1. ALL PARTS TO BE BULK PACKED.
 - 2. RED SILICONE O-RING (#2) IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 - 3. CONTACTS SUPPLIED UNASSEMBLED
 - 4. DIMENSIONS ARE REFERENCE ONLY

ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W13880-30PG-440W	0.400 [10.2] / .320-.400 [8.1-10.2]
W13880-30PG-450W	0.500 [12.7] / .400-.500 [10.2-12.7]
W13880-30PG-457W	0.570 [14.5] / .500-.570 [12.7-14.5]

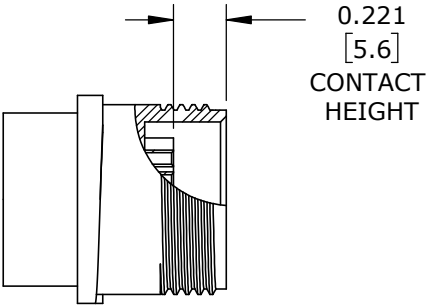

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY



DETAIL A

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT / INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

A	AN	02-11-26	DRAWING RELEASED PER PDR P-22007-2 & P-22007-6 DRAWING NUMBER WAS W13880-30PG-4XX			
	JWM	09-27-25	INITIAL RELEASE PER PDR-22007			
REV.	INIT.	DATE	DESCRIPTION			
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB		DATE: 08-30-23	
			CHECKED BY:		 601 E. WILDWOOD VILLA PARK, IL 60181	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:			
			SCALE NTS		SIZE B	SHEET 1 OF 1
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			FILE: W13880-30PG-4XXW		PART NUMBER: W13880-30PG-4XXW	
			DIRECTORY: SLW		REV A	