


- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING (#2) IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS SUPPLIED UNASSEMBLED
 4. DIMENSIONS ARE REFERENCE ONLY

ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W13880-30SG-440W	0.400 [10.2] /.320-.400 [8.1-10.2]
W13880-30SG-450W	0.500 [12.7] /.400-.500 [10.2-12.7]
W13880-30SG-457W	0.570 [14.5] /.500-.570 [12.7-14.5]

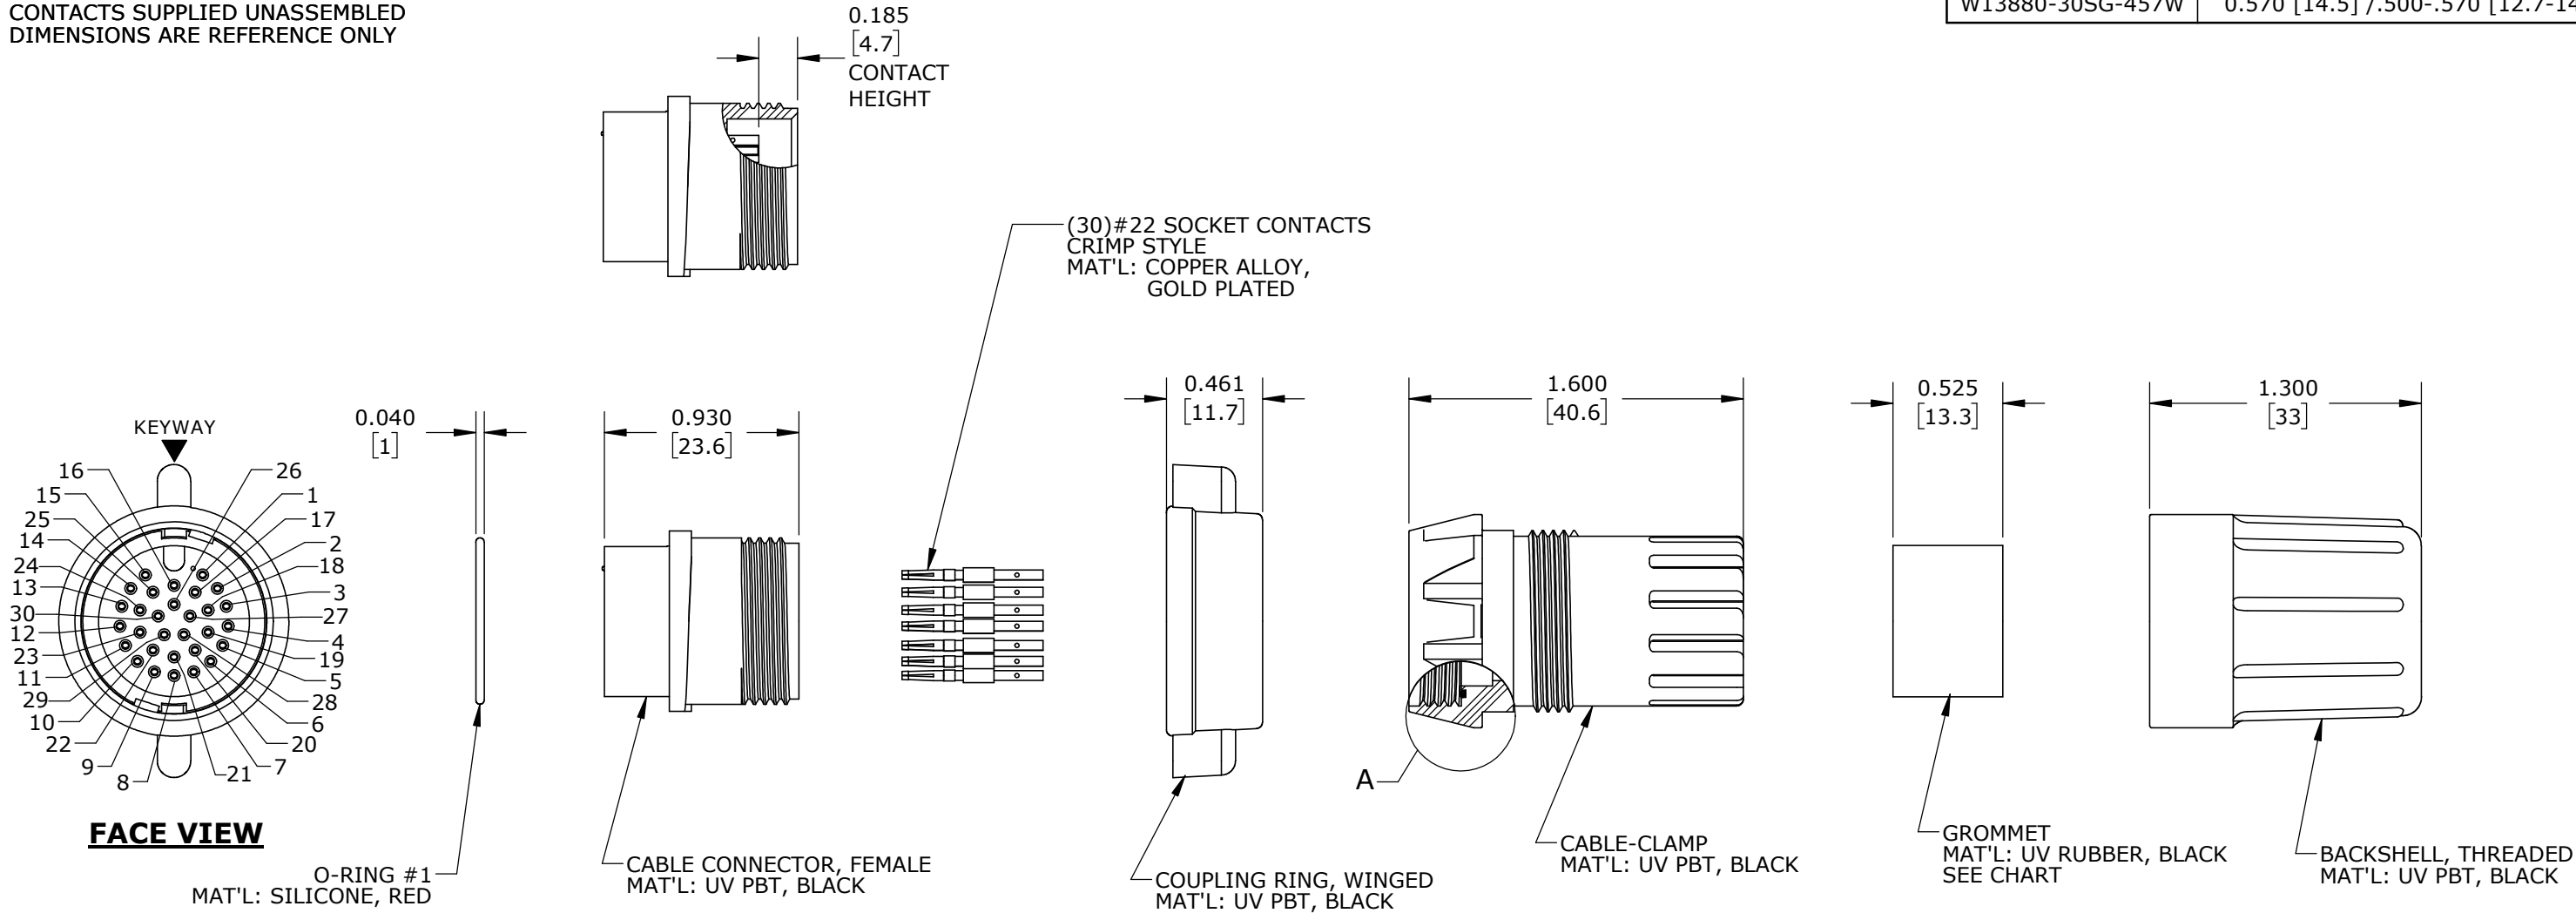

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____		DATE: _____	

A	AN	02-11-26	DRAWING RELEASED PER PDR P-22007-2 & P-22007-6 DRAWING NUMBER WAS W13880-30SG-4XX	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV:	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB	DATE: 08-30-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
			APPROVED BY:	
SCALE NTS		SIZE B	SHEET 1 OF 1	TITLE: CABLE END CONNECTOR KIT (30) #22 SKT CONTACTS, CRIMP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT
FILE: W13880-30SG-4XXW		DIRECTORY: SLW	PART NUMBER: W13880-30SG-4XXW	
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				REV A