


ASSY P/N	CABLE O.D.
W13882-30PG-331	.31-.38 [7.9-9.7]

- NOTES:**
- ALL PARTS TO BE BULK PACKED.
 - SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
 - ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

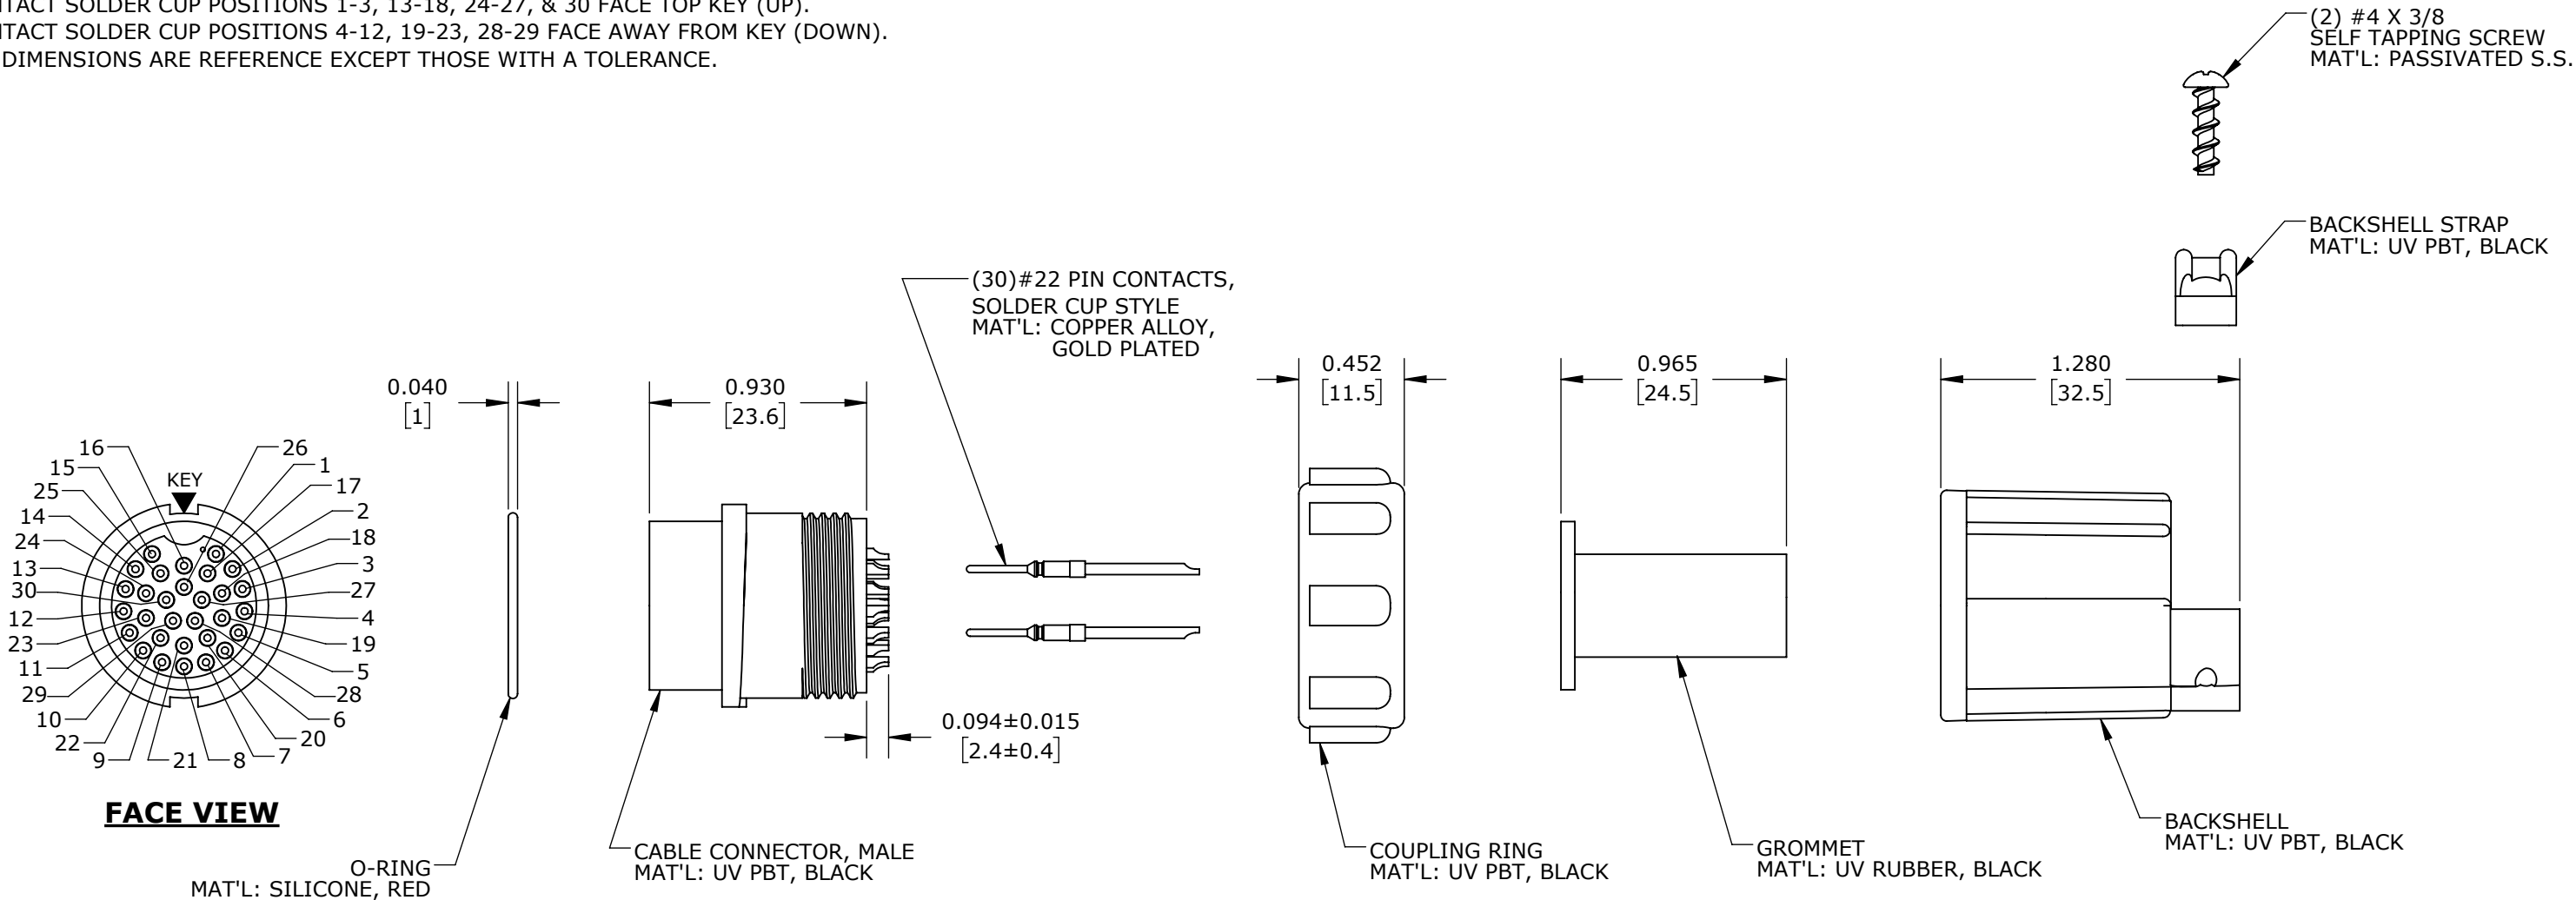

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

WIRE FACE

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

REV.	INIT.	DATE	DESCRIPTION
A	AN	12-01-25	DRAWING RELEASED PER PDR P-22007-2 & P-22007-6
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007
ORIG. DRAWN BY: ONB			DATE: 05/31/23
CHECKED BY:			
APPROVED BY:			
SCALE: NTS			SIZE: B
SHEET: 1 OF 1			
FILE: W13882-30PG-331			DIRECTORY: SLW
PART NUMBER: W13882-30PG-331			REV: A

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT



ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.



TITLE: CABLE END CONNECTOR KIT
(30) #22 PIN CONTACTS, SOLDER CUP
MAXI-CON-X, WEATHER RESISTANT
CUSTOMER: STANDARD PRODUCT