



NOTES:

1. ALL PARTS TO BE BULK PACKED.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
3. RED SILICONE O-RING (#2) IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W13882-30PG-440W	0.400 [10.2] / .320-.400 [8.1-10.2]
W13882-30PG-450W	0.500 [12.7] / .400-.500 [10.2-12.7]
W13882-30PG-457W	0.570 [14.5] / .500-.570 [12.7-14.5]

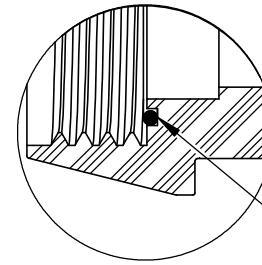

O-RING #2
MAT'L: SILICONE, RED

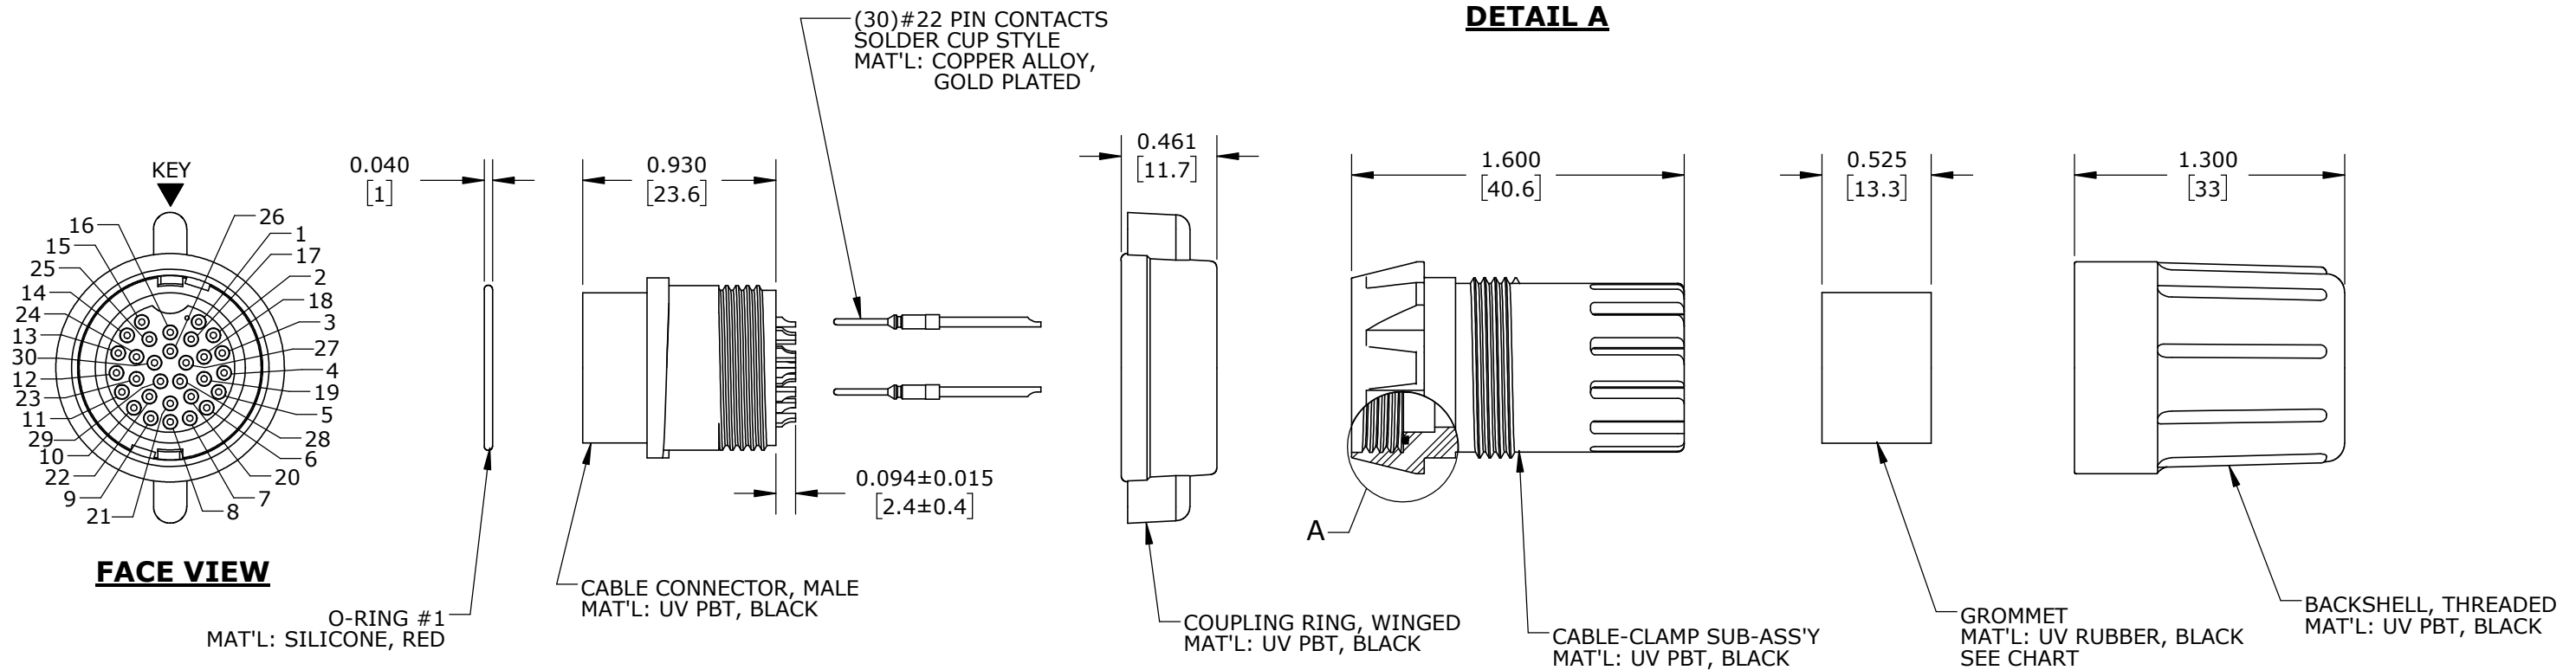DETAIL A

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

WIRE VIEW**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

A	AN	01-30-26	DRAWING RELEASED PER PDR P-22007-2 & P-22007-6 DRAWING NUMBER WAS W13882-30PG-4XX			
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007			
REV.	INIT.	DATE	DESCRIPTION			
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			ORIG. DRAWN BY: DATE:		conxall 601 E. WILDWOOD VILLA PARK, IL 60181	
			ONB 05/31/23			
CHECKED BY:		TITLE: CABLE END CONNECTOR KIT (30) #22 PIN CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT CUSTOMER: W13882-30PG-4XXW				
APPROVED BY:						
SCALE	SIZE			SHEET		
NTS	B			1 OF 1		
▷	= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX		FILE:	DIRECTORY:	PART NUMBER:	REV A
			W13882-30PG-4XXW	SLW	W13882-30PG-4XXW	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT



CRITICAL CHARACTERISTIC
FLAG PER SPEC. XXXX