
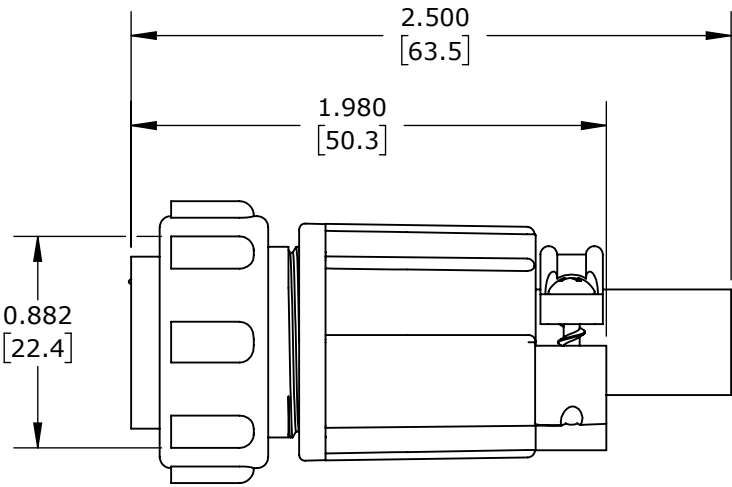
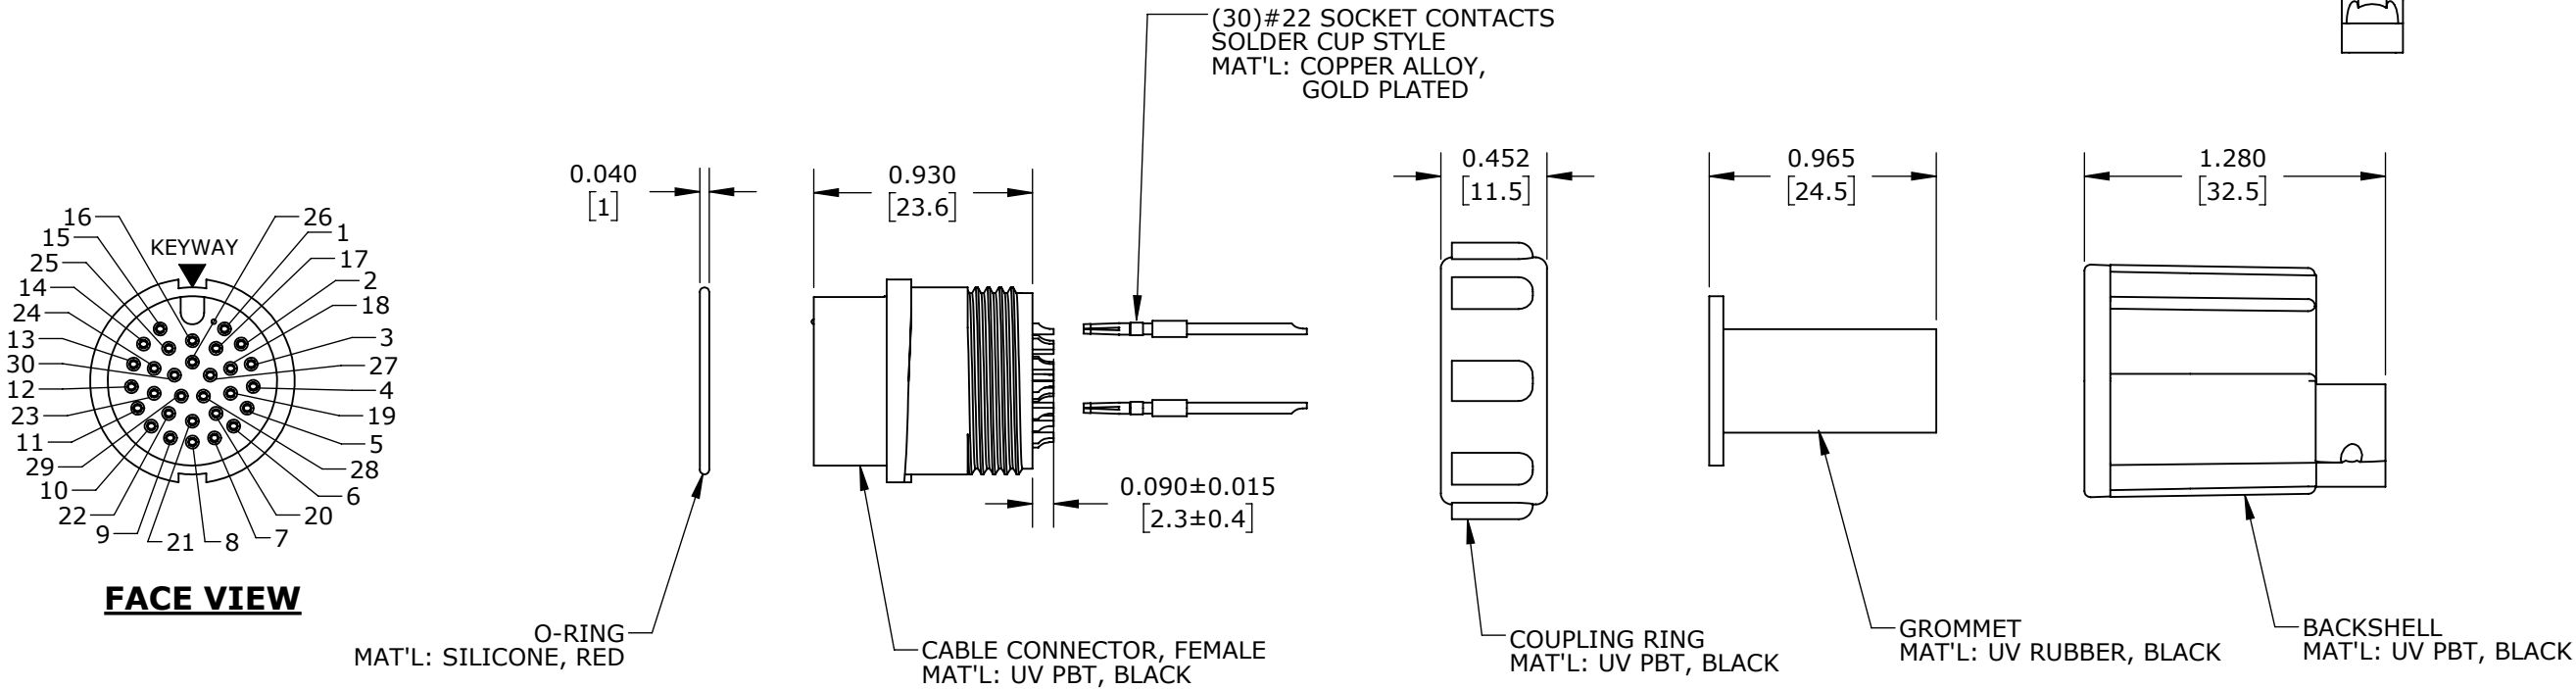



ASSY P/N	FOR CABLE O.D.
W13882-30SG-331	.31-.38 [7.9-9.7]

NOTES:

- ALL PARTS TO BE BULK PACKED.
- SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
- ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

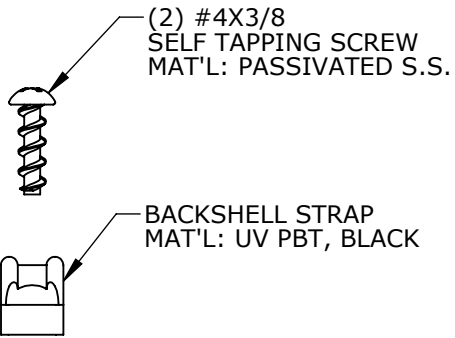

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

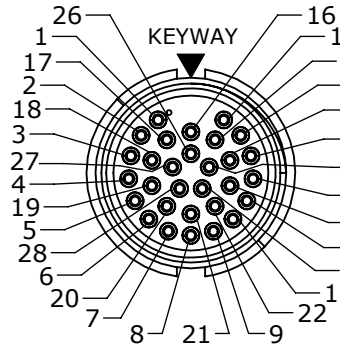

WIRE FACE

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

A	AN	12-01-25	DRAWING RELEASED PER P-22007-2 & P-22007-6	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV.	INIT.	DATE	DESCRIPTION	
AB			ORIG. DRAWN BY: DATE: 08-30-23	
			CHECKED BY:	
			APPROVED BY:	
			TITLE: CABLE END CONNECTOR KIT (30) #22 SKT CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT	
			CUSTOMER: STANDARD PRODUCT	
			PART NUMBER: W13882-30SG-331	
			REV A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.

ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.

