




- NOTES:**
1. ALL PARTS TO BE BULK PACKED.
 2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
 3. RED SILICONE O-RING (#2) IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W13882-30SG-440W	0.400 [10.2] / .320-.400 [8.1-10.2]
W13882-30SG-450W	0.500 [12.7] / .400-.500 [10.2-12.7]
W13882-30SG-457W	0.570 [14.5] / .500-.570 [12.7-14.5]




O-RING #2
MAT'L: SILICONE, RED

DETAIL A

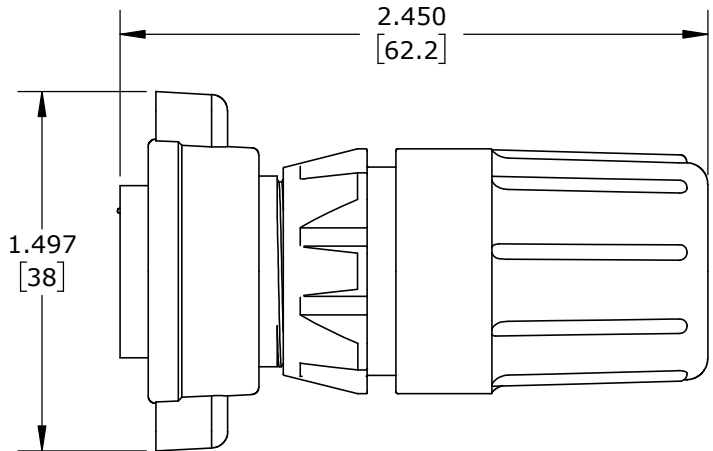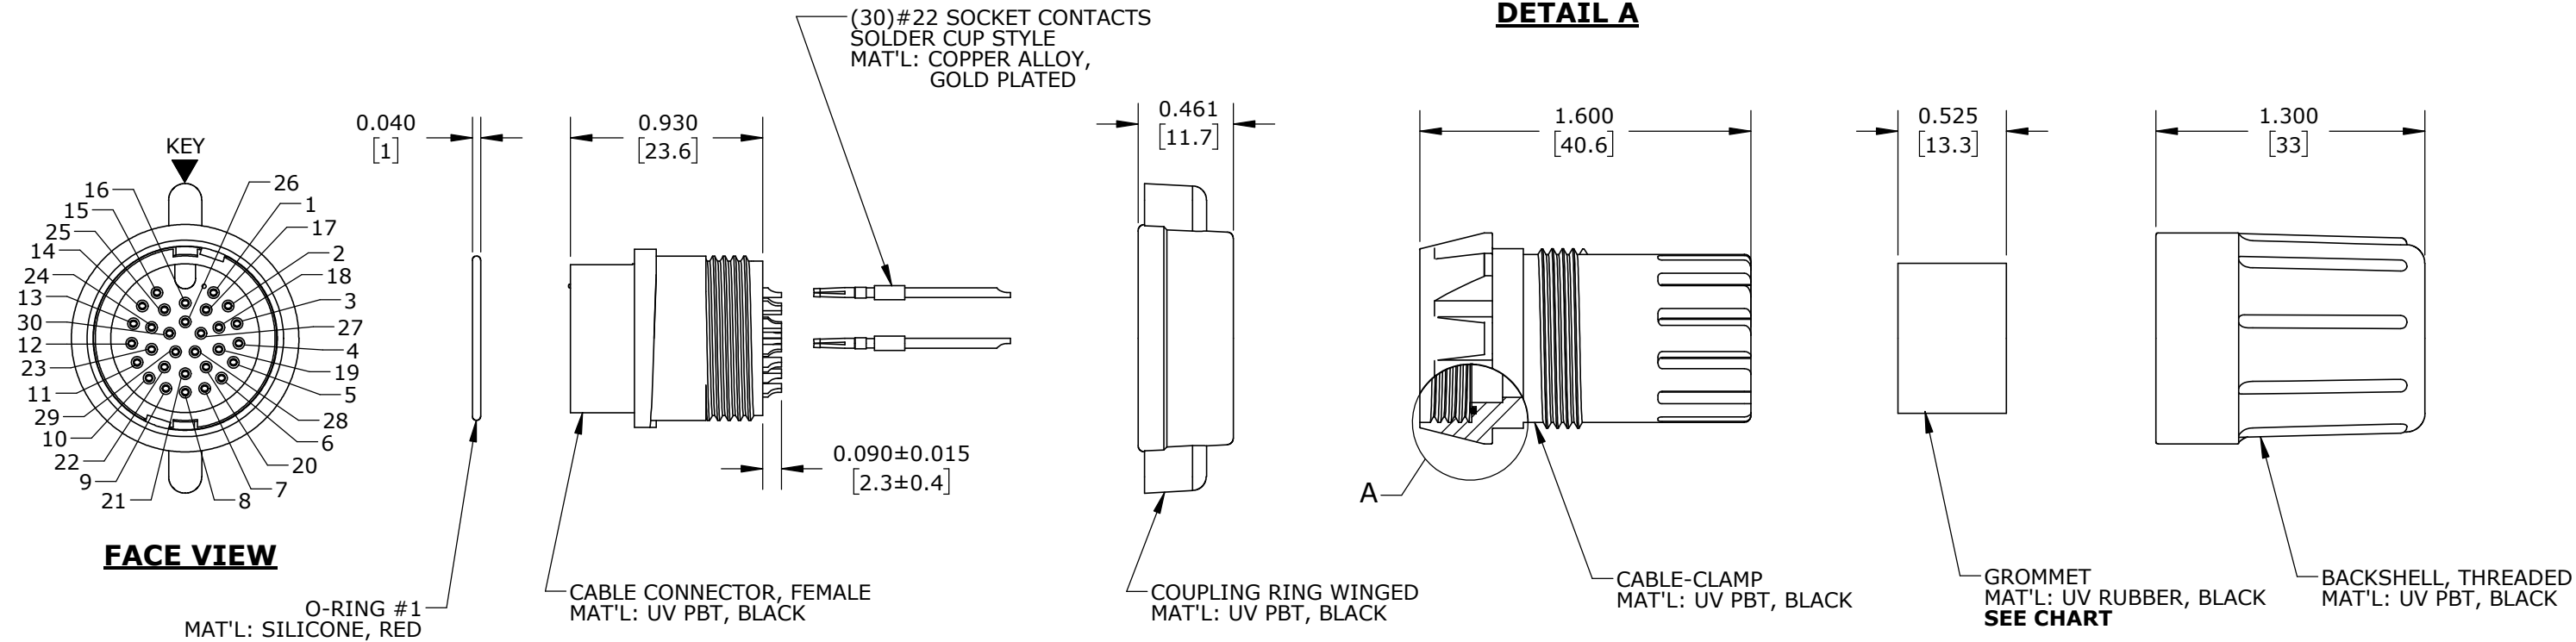

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

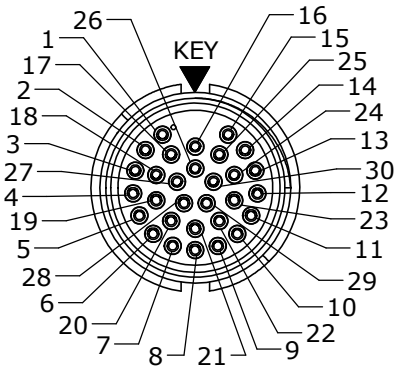

WIRE VIEW

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

A	AN	02-11-26	DRAWING RELEASED PER P-22007-2 & P-22007-6 DRAWING NUMBER WAS W13882-30SG-4XX	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV.	INIT.	DATE	DESCRIPTION	
AB		08-30-23	ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. CONXALL 601 E. WILDWOOD VILLA PARK, IL 60181	
APPROVED BY:			TITLE: CABLE END CONNECTOR KIT (30) #22 SKT CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT	
SCALE NTS	SIZE B	SHEET 1 OF 1	CUSTOMER:	
FILE: W13882-30SG-4XXW	DIRECTORY: SLW	PART NUMBER: W13882-30SG-4XXW	REV A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

