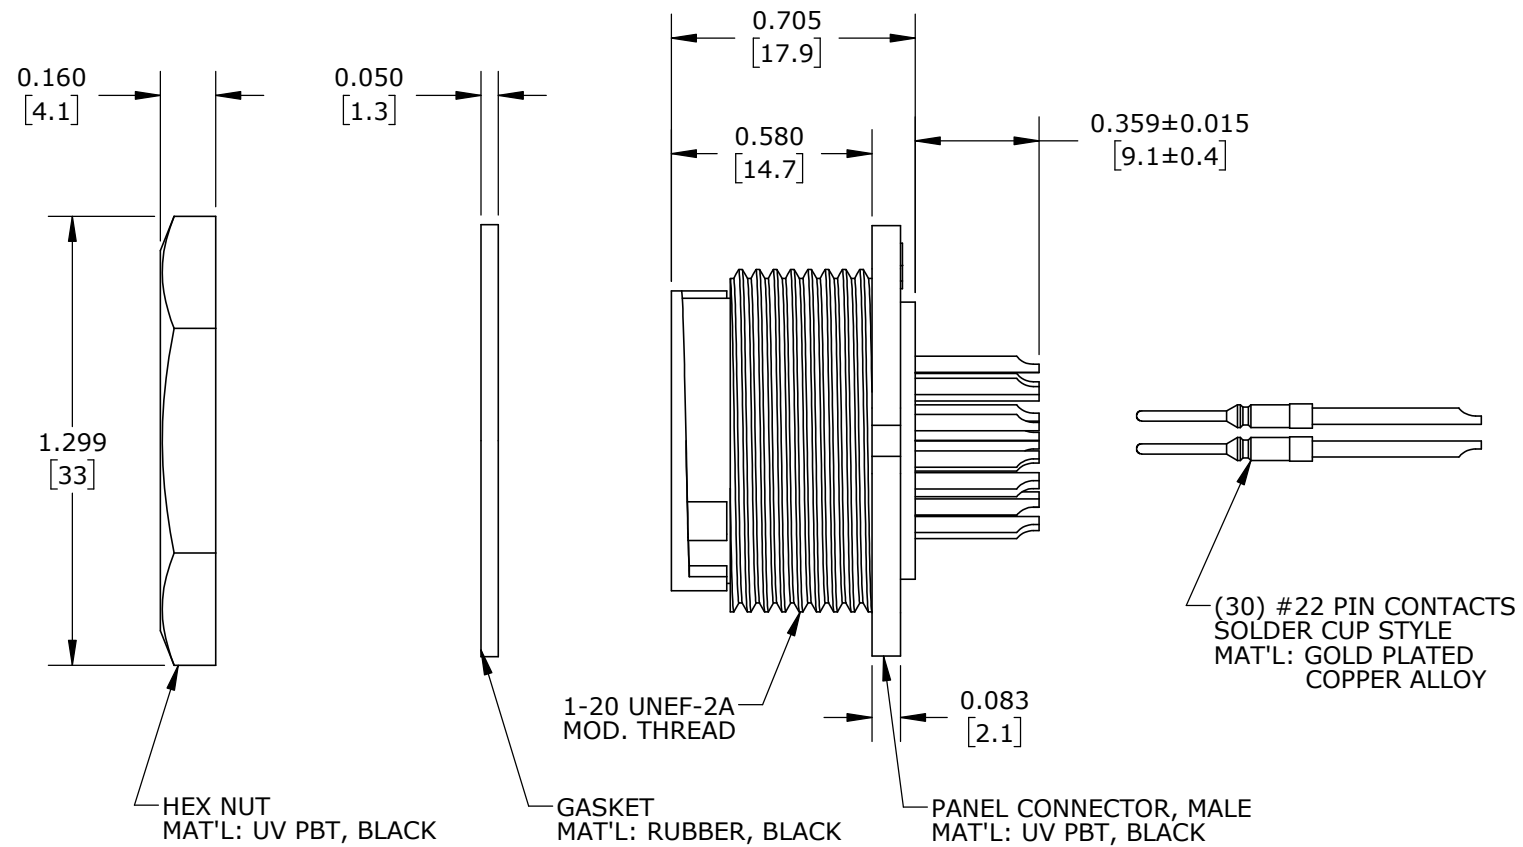
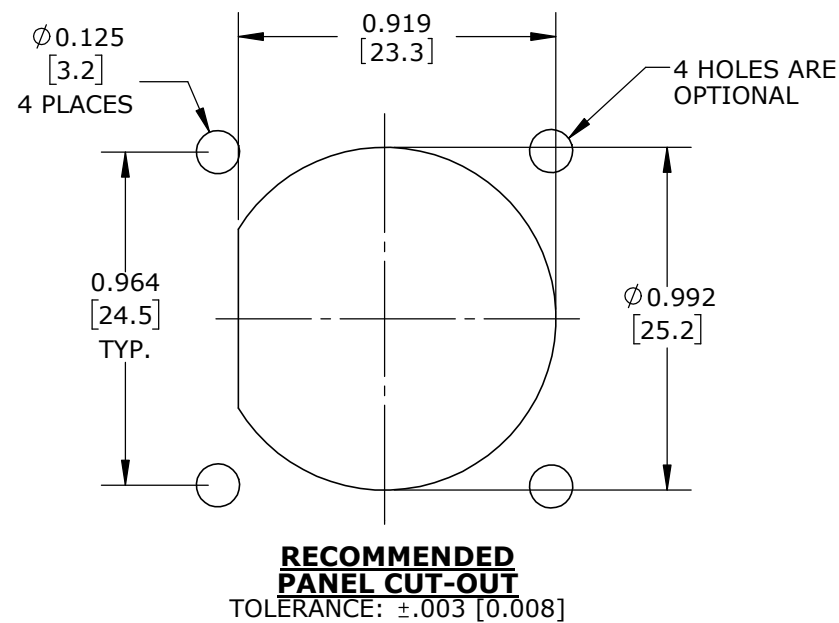
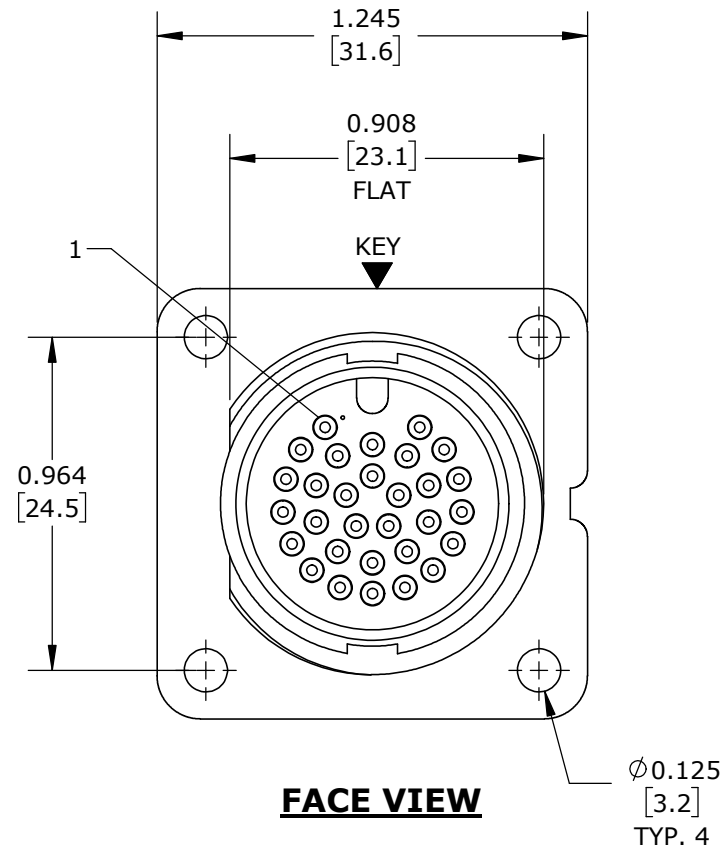


NOTES:

1. ALL PARTS TO BE BOXED.
HEX NUTS AND GASKETS MAY BE PACKAGED SEPARATELY.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
3. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

**CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

A	AN	02-02-26	DRAWING RELEASED PER PDR P-22007-3 & P-22007-6	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV.	INIT.	DATE	DESCRIPTION	
AB		08-30-23	ORIG. DRAWN BY: DATE: 08-30-23	
			CHECKED BY:	
			APPROVED BY:	
			TITLE: PANEL CONNECTOR KIT (30) #22 PIN CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT	
			CUSTOMER: STANDARD PRODUCT	
			PART NUMBER: W14882-30PG-300	
			REV A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT= CRITICAL CHARACTERISTIC
FLAG PER SPEC. XXXX