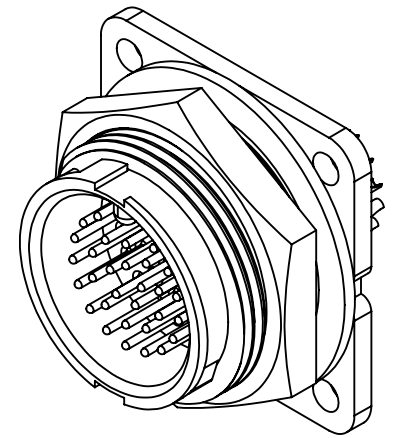
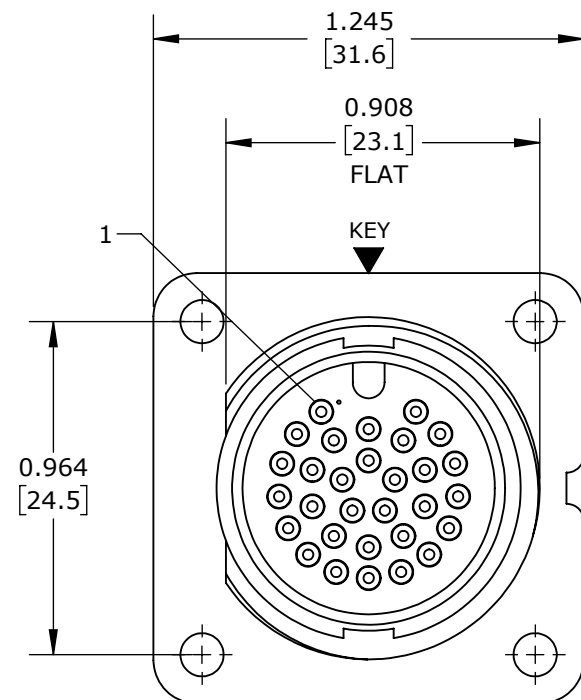
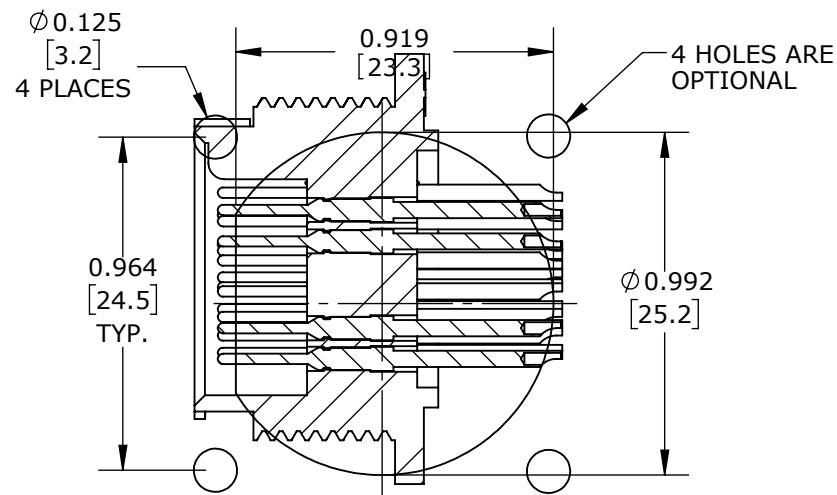
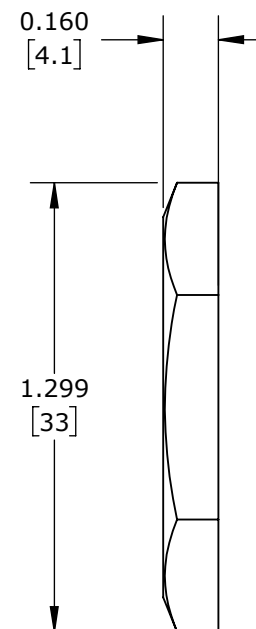
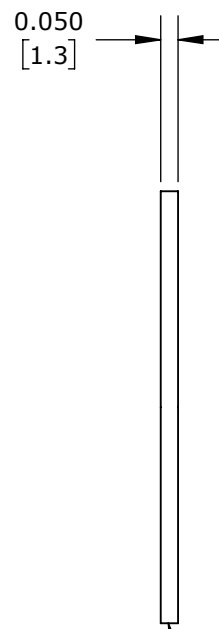
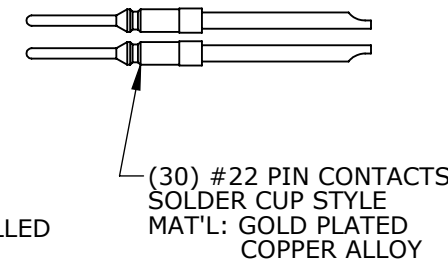
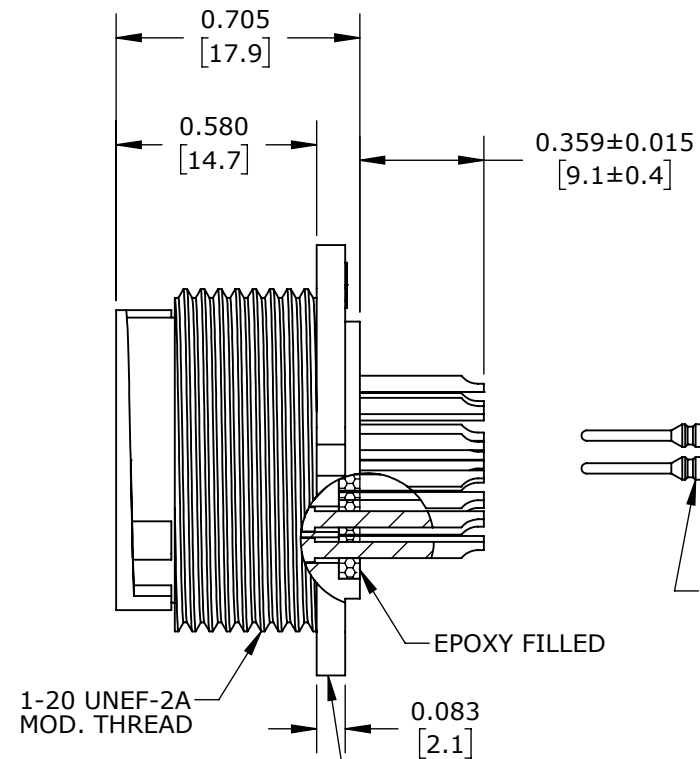
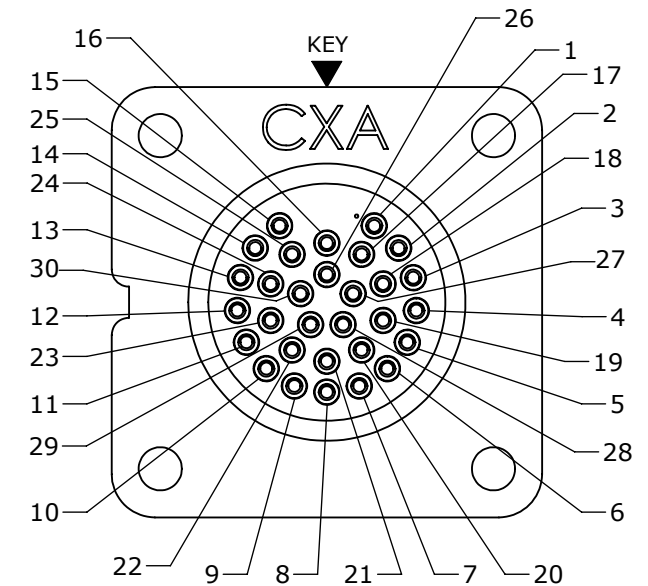


NOTES:

1. ALL PARTS TO BE BOXED.
HEX NUTS AND GASKETS MAY BE PACKAGED SEPARATELY.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
3. BACK SIDE OF PANEL CONNECTOR IS APPLIED WITH BLACK EPOXY.
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

**ASSEMBLED VIEW****FACE VIEW****RECOMMENDED
PANEL CUT-OUT**
TOLERANCE: ± 0.003 [0.008]HEX NUT
MAT'L: UV PBT, BLACKGASKET
MAT'L: RUBBER, BLACK(30) #22 PIN CONTACTS
SOLDER CUP STYLE
MAT'L: GOLD PLATED
COPPER ALLOY**WIRE VIEW****CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

REV.	INIT.	DATE	DESCRIPTION	
			DRAWING RELEASED PER PDR P-22007-3 & P-22007-6	
A	AN	02-02-26	INITIAL RELEASE PER PDR-22007	
	JWM	09-22-25		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB	DATE: 08-30-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	
			APPROVED BY:	
			SCALE: NTS	SIZE: B
			SHEET: 1 OF 1	
			FILE: W14882-30PG-3ES	DIRECTORY: SLW
			PART NUMBER: W14882-30PG-3ES	REV: A

conxall
601 E. WILDWOOD VILLA PARK, IL 60181TITLE: PANEL CONNECTOR KIT
(30) #22 PIN CONTACTS, SOLDER CUP
MAXI-CON-X, WEATHER RESISTANT
STANDARD PRODUCT
CUSTOMER: STANDARD PRODUCT

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT- CRITICAL CHARACTERISTIC
FLAG PER SPEC, XXXX