
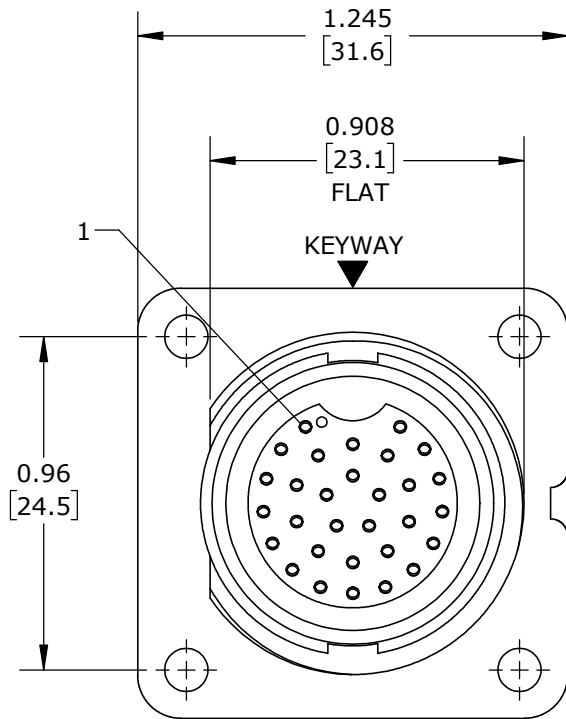
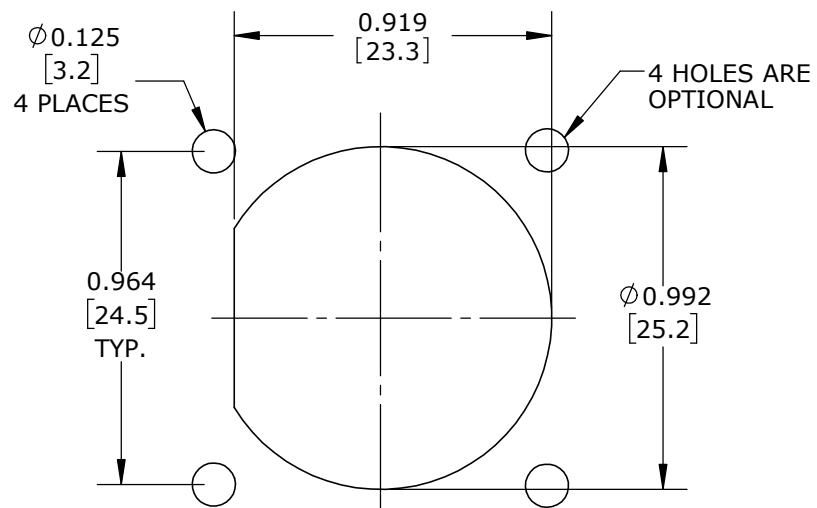


NOTES:


1. ALL PARTS TO BE BOXED.
HEX NUTS AND GASKETS MAY BE PACKAGED SEPARATELY.
2. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
3. BACK END OF PANEL CONNECTOR IS FILLED WITH BLACK EPOXY.
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

**FACE VIEW**


**RECOMMENDED
PANEL CUT-OUT**
TOLERANCE: ± 0.003 [0.008]

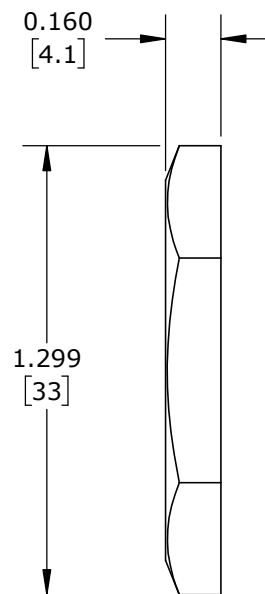

HEX NUT
MAT'L: UV PBT, BLACK

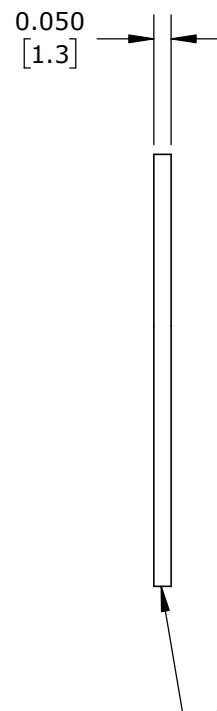

GASKET
MAT'L: RUBBER, BLACK


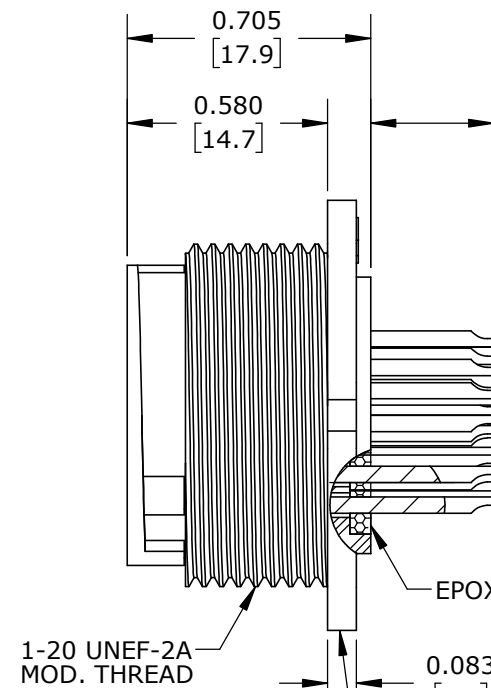


PANEL CONNECTOR, FEMALE
MAT'L: UV PBT, BLACK

0.355 $\pm$ 0.015
[9 $\pm$ 0.4]

EPOXY FILLED

(30) #22 SOCKET CONTACTS
SOLDER CUP STYLE
MAT'L: GOLD PLATED
COPPER ALLOY

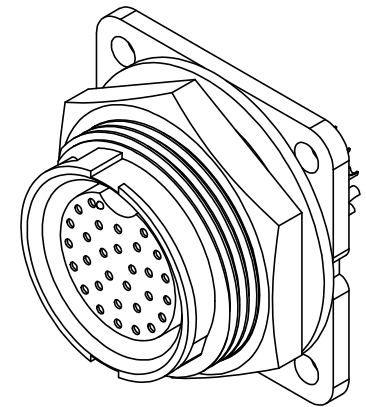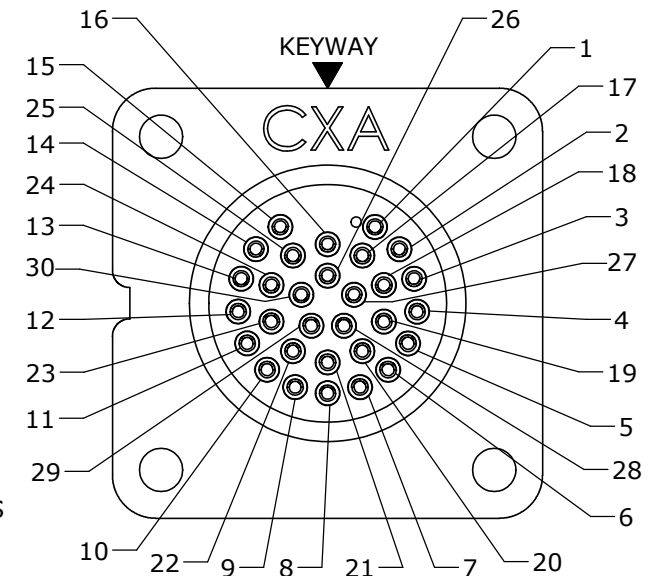**ASSEMBLED VIEW****WIRE VIEW****CUSTOMER APPROVAL**

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

A	AN	02-02-26	DRAWING RELEASED PER PDR P-22007-3 & P-22007-6	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV:	INIT.	DATE	DESCRIPTION	
	AB		ORIG. DRAWN BY: DATE: 08-31-23	 601 E. WILDWOOD VILLA PARK, IL 60181
			CHECKED BY:	
			APPROVED BY:	TITLE: PANEL CONNECTOR KIT (30) #22 SKT CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT
			SCALE: NTS SIZE: B SHEET: 1 OF 1	CUSTOMER: STANDARD PRODUCT
			FILE: W14882-30SG-3ES DIRECTORY: SLW	
			PART NUMBER: W14882-30SG-3ES	REV A

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT



= CRITICAL CHARACTERISTIC
FLAG PER SPEC. XXXX