
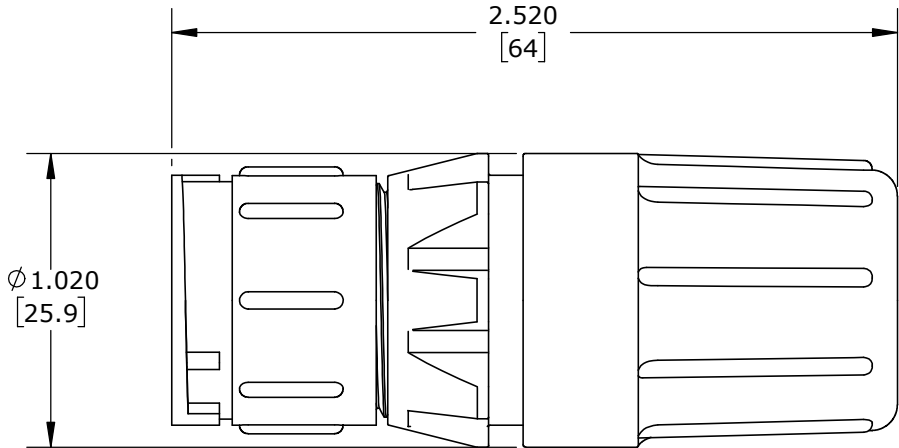


- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS SUPPLIED UNASSEMBLED
 4. DIMENSIONS ARE REFERENCE ONLY

ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W15880-30PG-440	GROMMET ID .400 [10.2] FOR CABLE OD .320 - .400 [8.1 - 10.2]
W15880-30PG-450	GROMMET ID .500 [12.7] FOR CABLE OD .400 - .500 [10.2 - 12.7]
W15880-30PG-457	GROMMET ID .570 [14.5] FOR CABLE OD .500 - .570 [12.7 - 14.5]

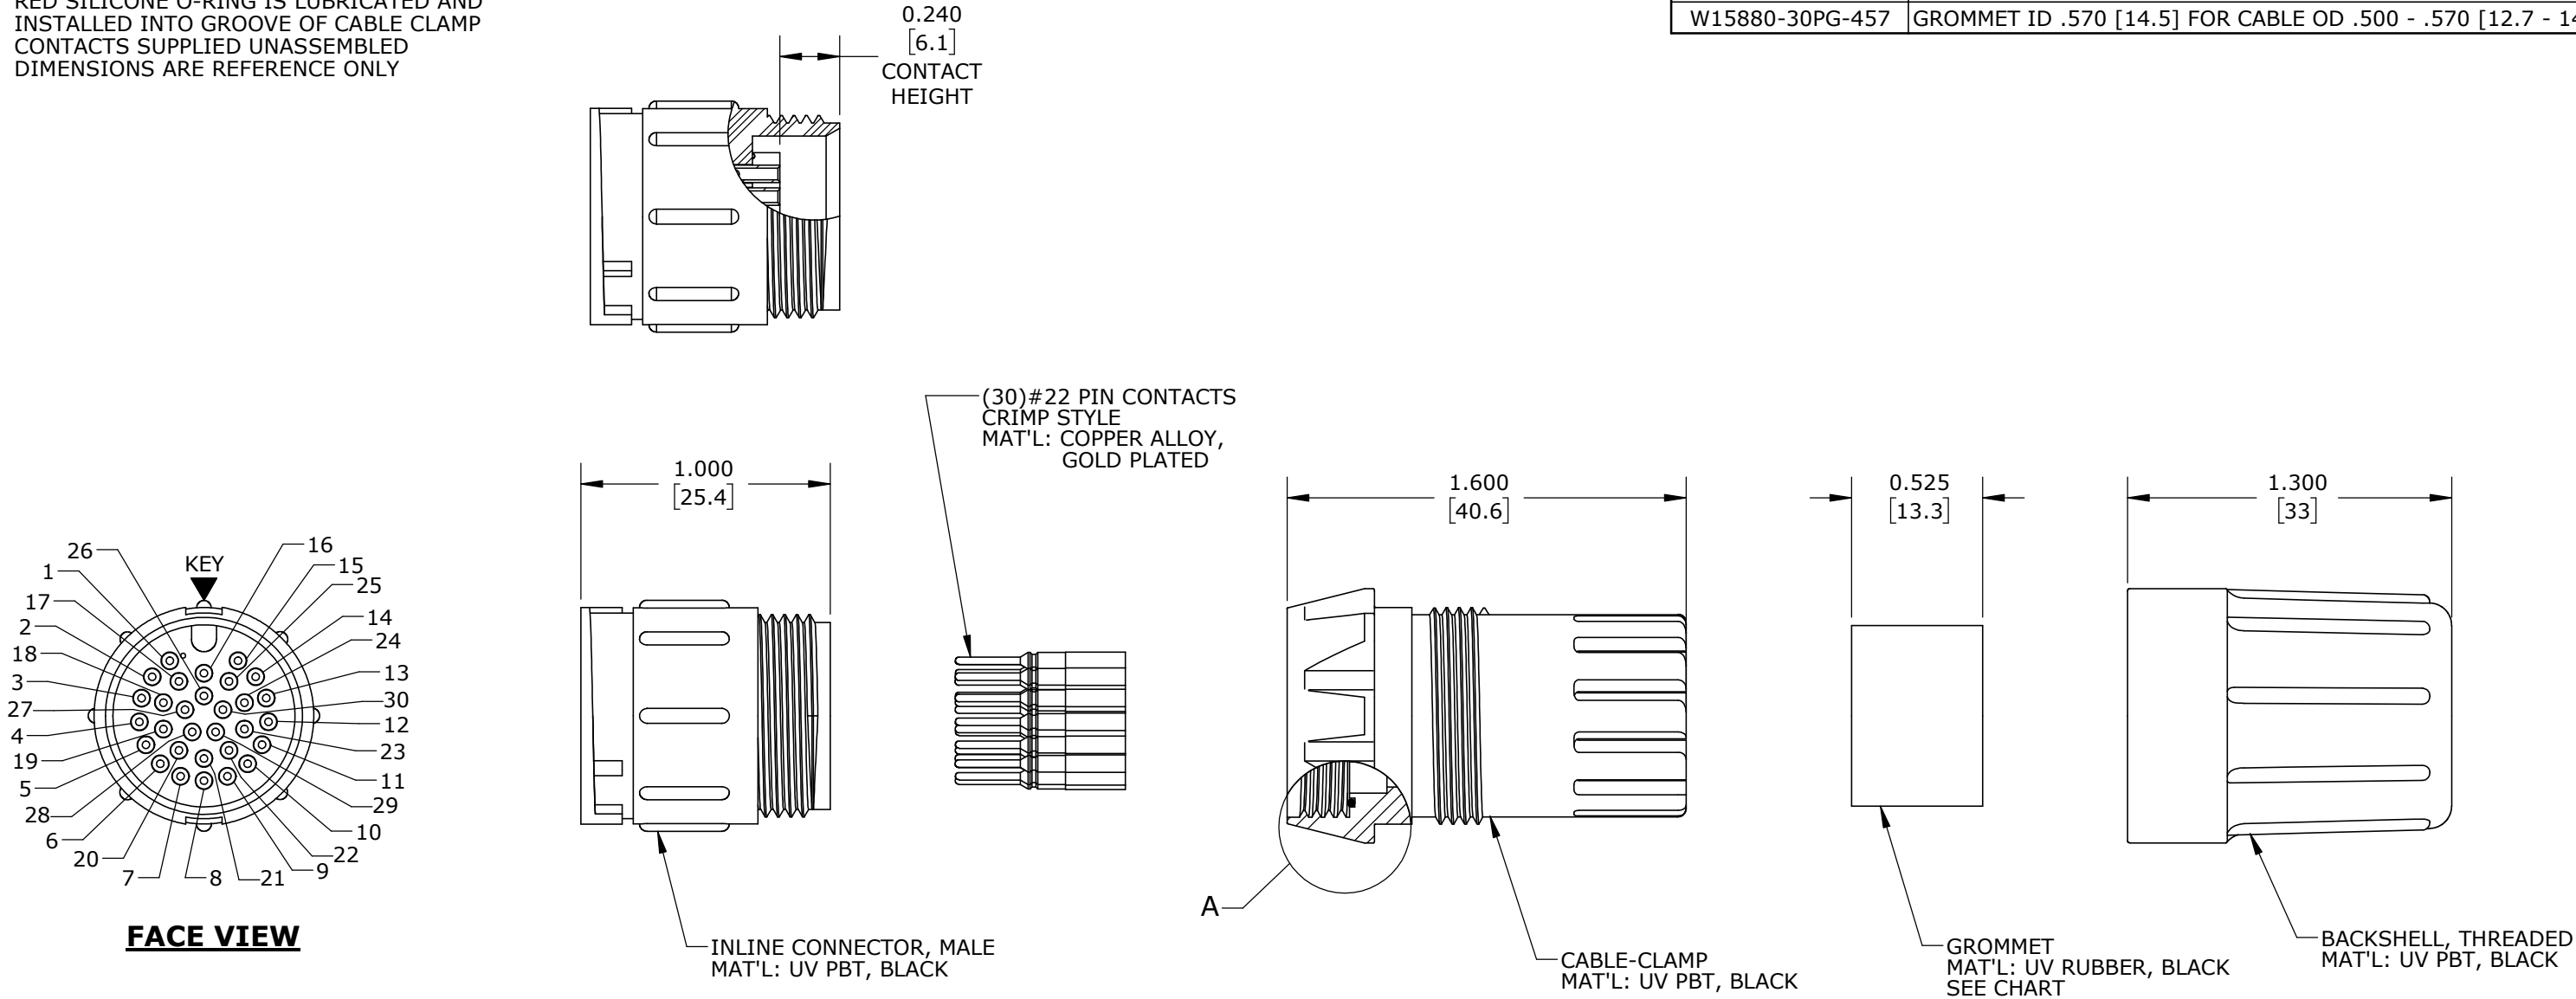

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____		DATE: _____	

A	AN	02-02-26	DRAWING RELEASED PER PDR P-22007-4 & P-22007-6			
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007			
REV.	INIT.	DATE	DESCRIPTION			
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: DATE:		 601 E. WILDWOOD VILLA PARK, IL 60181	
			AB 09-01-23			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:			
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX	APPROVED BY:		TITLE: CABLE TO CABLE CONNECTOR KIT (30) #22 PIN CONTACTS, CRIMP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT		REV A	
						CUSTOMER:
	SCALE	SIZE	SHEET	PART NUMBER: W15880-30PG-4XX		
	NTS	B	1 OF 1			
FILE: W15880-30PG-4XX		DIRECTORY: SLW				

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT



= CRITICAL CHARACTERISTIC
FLAG PER SPEC. XXXX