



ASSY P/N	FOR CABLE O.D.
W15882-30PG-331	.31-.38 [7.9-9.7]

NOTES:


- ALL PARTS TO BE BULK PACKED.
- SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
- ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

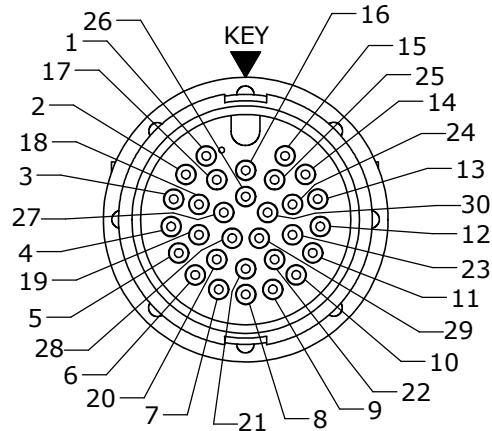


FACE VIEW

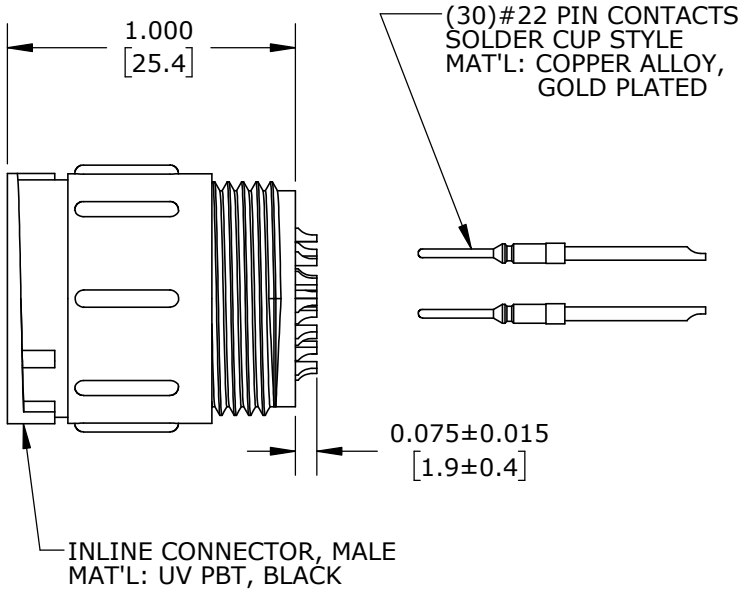



INLINE CONNECTOR, MALE
MAT'L: UV PBT, BLACK




GROMMET
MAT'L: UV RUBBER, BLACK

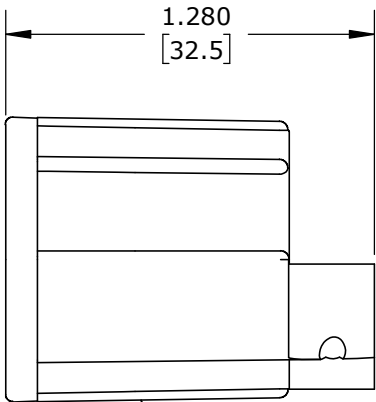

BACKSHELL
MAT'L: UV PBT, BLACK

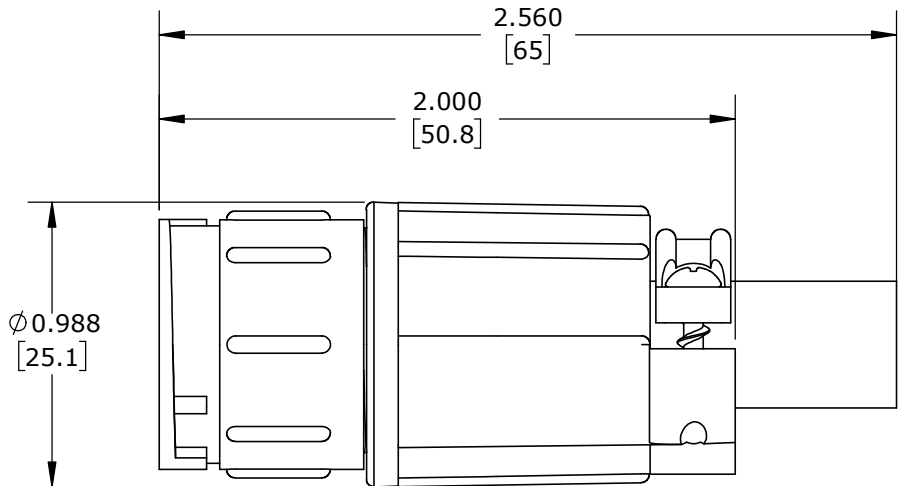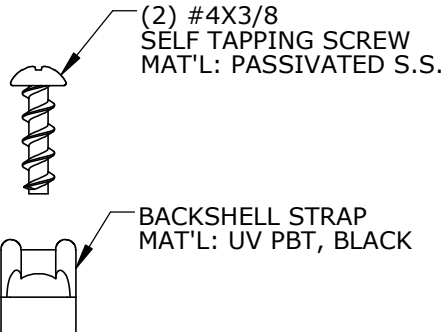

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

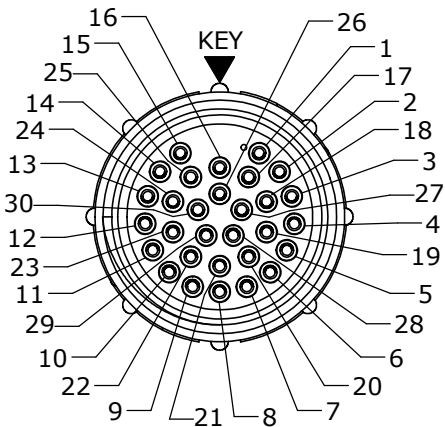

WIRE VIEW

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY:	_____
DATE:	_____

A	AN	12-11-25	DRAWING RELEASED PER PDR P-22007-4 & P-22007-6					
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007					
REV.	INIT.	DATE	DESCRIPTION					
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: AB		DATE: 09-01-23		 601 E. WILDWOOD VILLA PARK, IL 60181	
			CHECKED BY:					
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:		TITLE: CABLE TO CABLE CONNECTOR KIT (30) #22 PIN CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT CUSTOMER: STANDARD PRODUCT			
▷ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			SCALE NTS	SIZE B	SHEET 1 OF 1		PART NUMBER: W15882-30PG-331	
			FILE: W15882-30PG-331		DIRECTORY: SLW			
							REV A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT



= CRITICAL CHARACTERISTIC
FLAG PER SPEC. XXXX