



- NOTES:**
- 1. ALL PARTS TO BE BULK PACKED.
 - 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 - 3. SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
 - 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.



ASSY P/N	GROMMET I.D. / CABLE O.D. RANGE
W15880-30PG-440	GROMMET ID .400 [10.2] FOR CABLE OD .320 - .400 [8.1 - 10.2]
W15880-30PG-450	GROMMET ID .500 [12.7] FOR CABLE OD .400 - .500 [10.2 - 12.7]
W15880-30PG-457	GROMMET ID .570 [14.5] FOR CABLE OD .500 - .570 [12.7 - 14.5]

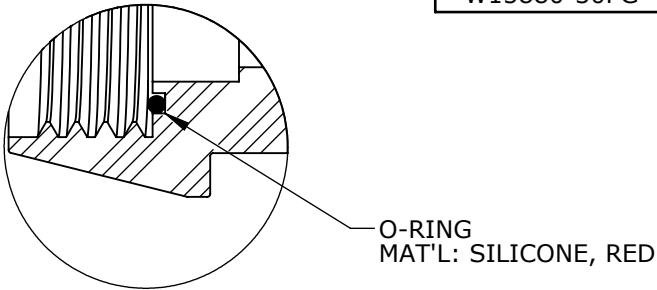


DETAIL A

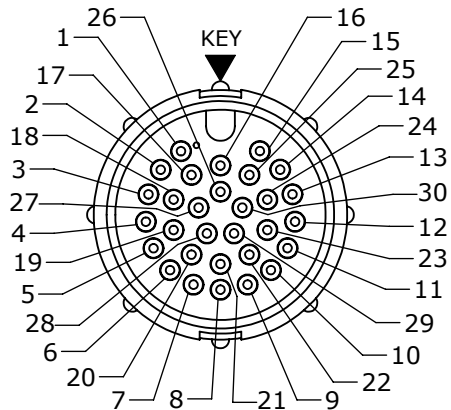

FACE VIEW

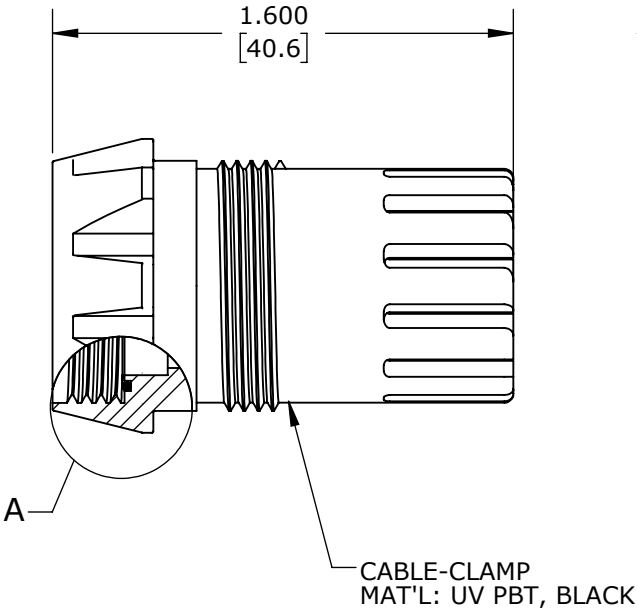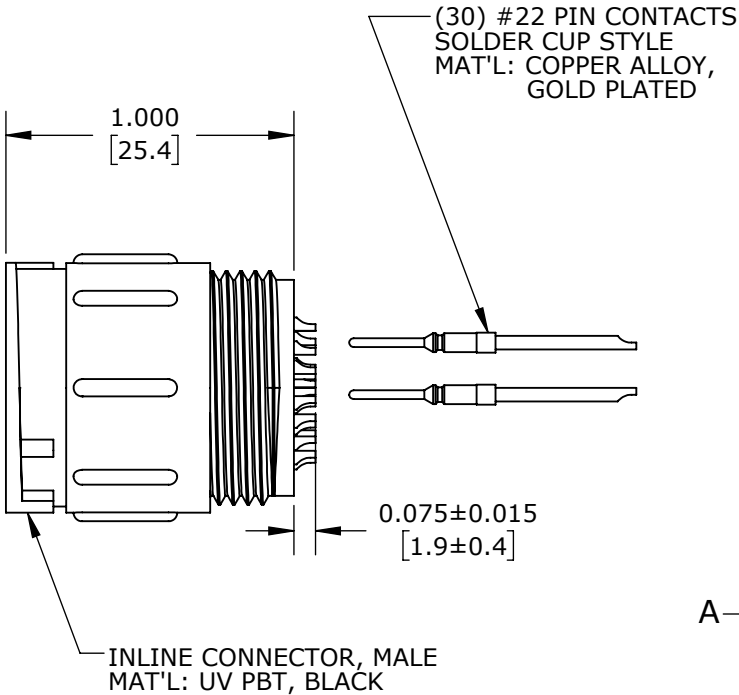

WIRE VIEW

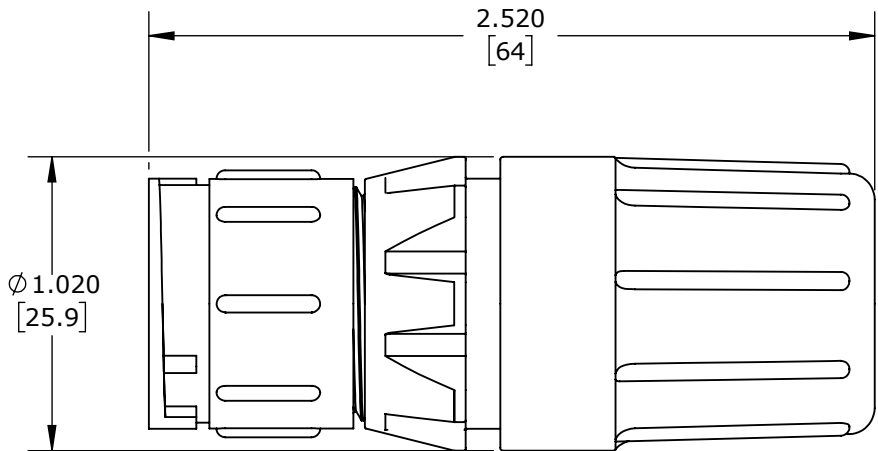

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

A	AN	02-03-26	DRAWING RELEASED PER DR P-22007-4 & P-22007-6	
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007	
REV.	INIT.	DATE	DESCRIPTION	
AB		09-01-23	ORIG. DRAWN BY: DATE: 09-01-23	
			CHECKED BY:	
			APPROVED BY:	
			TITLE: CABLE TO CABLE CONNECTOR KIT (30) #22 PIN CONTACTS, SOLDER CUP MAXI-CON-X, WEATHER RESISTANT STANDARD PRODUCT	
			CUSTOMER: STANDARD PRODUCT	
			PART NUMBER: W15882-30PG-4XX	
			REV A	

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ - CRITICAL CHARACTERISTIC FLAG PER SPEC, XXXX