


ASSY P/N	FOR CABLE O.D.
W15882-30SG-331	.31-.38 [7.9-9.7]

- NOTES:**
- ALL PARTS TO BE BULK PACKED.
 - SOLDER CONTACTS ARE PRESSED INTO CONNECTOR.
CONTACT SOLDER CUP POSITIONS 1-3, 13-18, 24-27, & 30 FACE TOP KEY (UP).
CONTACT SOLDER CUP POSITIONS 4-12, 19-23, 28-29 FACE AWAY FROM KEY (DOWN).
 - ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE.

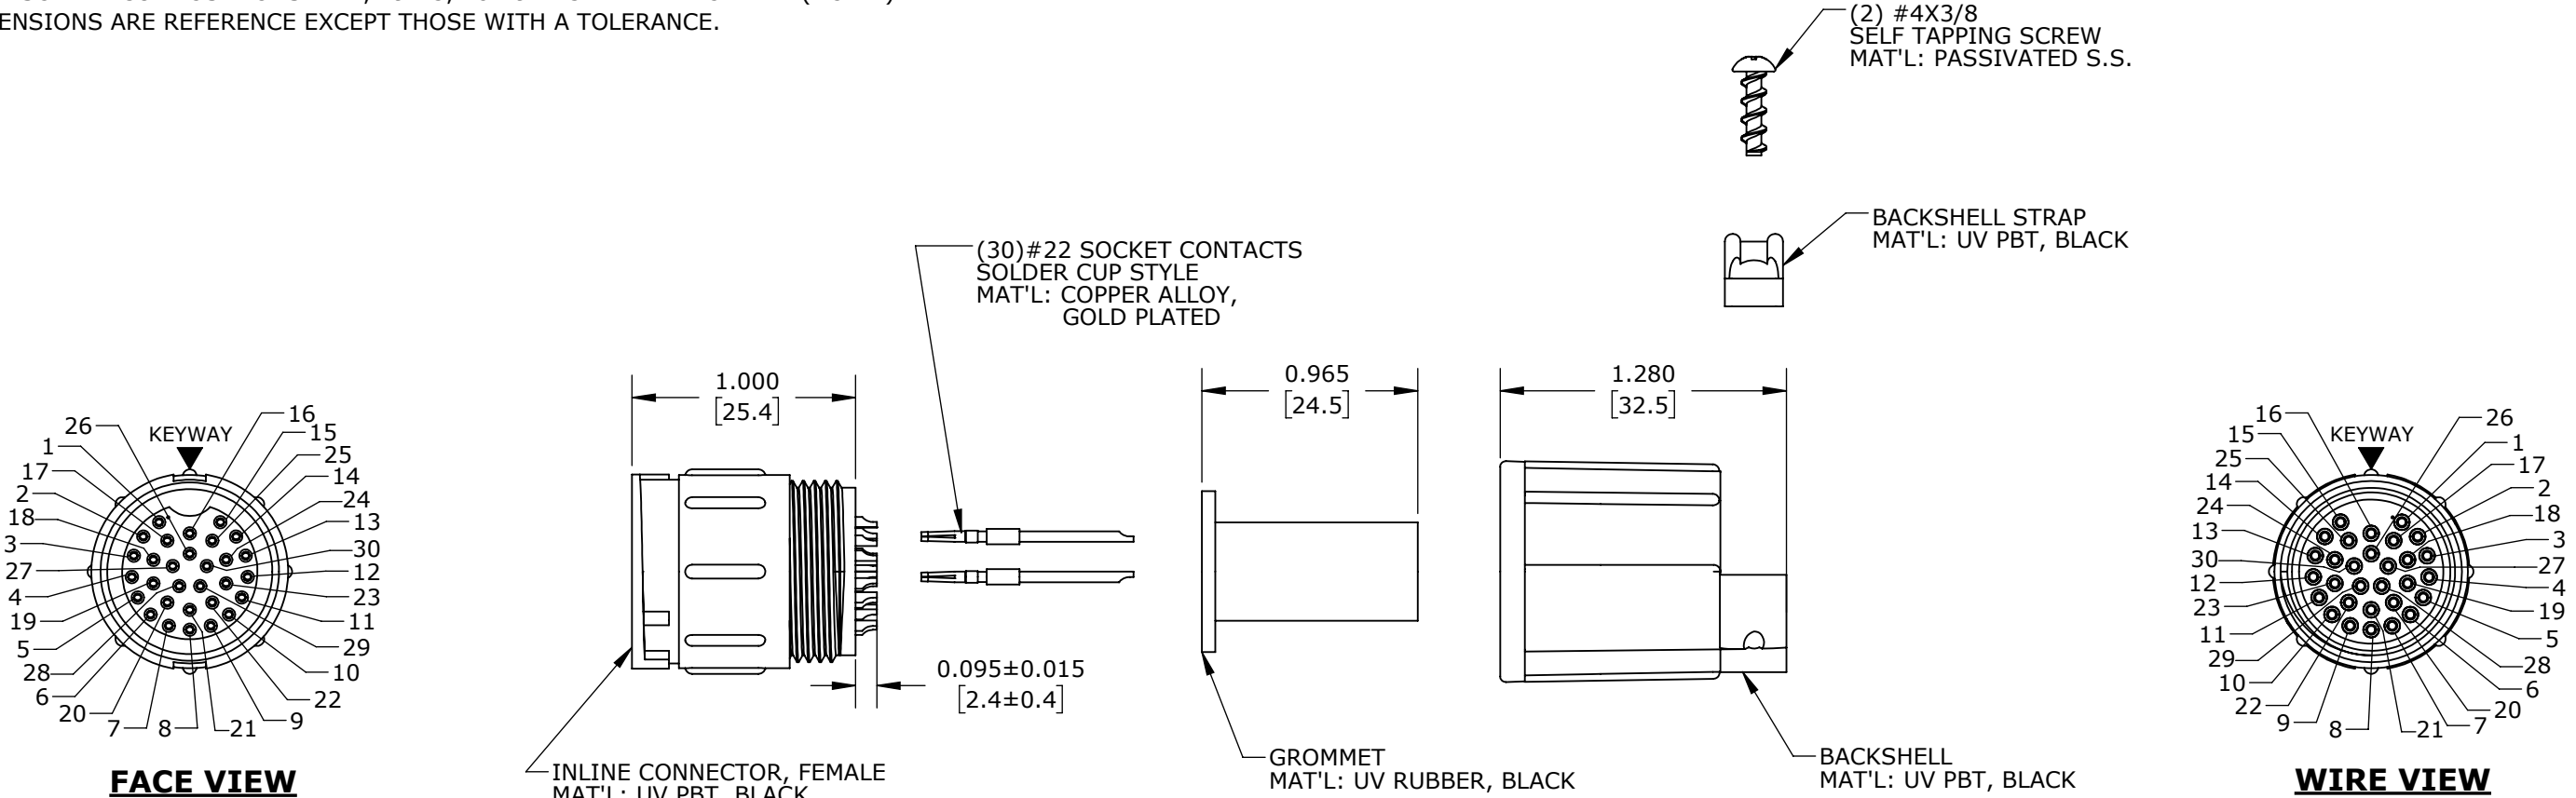

SHOWN ASSEMBLED KIT
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			
A	AN	01-13-26	RELEASED PER PDR P-22007-4 & P-22007-6
	JWM	09-22-25	INITIAL RELEASE PER PDR-22007
REV.	INIT.	DATE	DESCRIPTION
AB		09-05-23	ORIG. DRAWN BY: DATE: 09-05-23
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:
- CRITICAL CHARACTERISTIC FLAG PER SPEC, XXXX			SCALE SIZE SHEET NTS B 1 OF 1
FILE: W15882-30SG-331			DIRECTORY: SLW
PART NUMBER: W15882-30SG-331			REV A

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT