
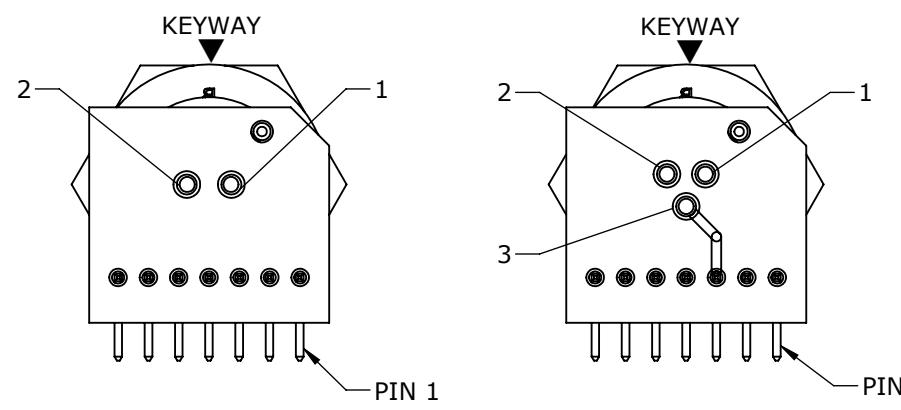


NOTES:

1. PANEL CONNECTORS TO BE PACKED IN PARTITIONED BOX, 100 PC PER BOX.
2. ALL HOLES REQUIRED REGARDLESS OF NUMBER OF POSITIONS OF CONNECTOR.
3. HEX NUT AND GASKET SHIPPED UNASSEMBLED
4. HEX NUT TIGHTENING TORQUE: 9 IN./LB MAX.
5. CURRENT RATING:
2 CONTACT: 6.5 AMP
3 CONTACT: 6.0 AMP
6. TEMPERATURE RATING: -40°C TO +85°C (-40°F TO +185°F)
7. MATERIALS:
PANEL CONNECTOR, HEX NUT, SPACER: UV PBT
GASKET: RUBBER
CONTACTS: COPPER ALLOY, GOLD PLATED
PCB: FR-4
HEADER INSULATOR: THERMOPLASTIC, UL94V-0
8. REAR WELL OF PANEL CONNECTOR TO BE FILLED WITH EPOXY.
9. SEE DRAWING HPMCSTD FOR HOLE PATTERN.
10. ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE SPECIFIED.

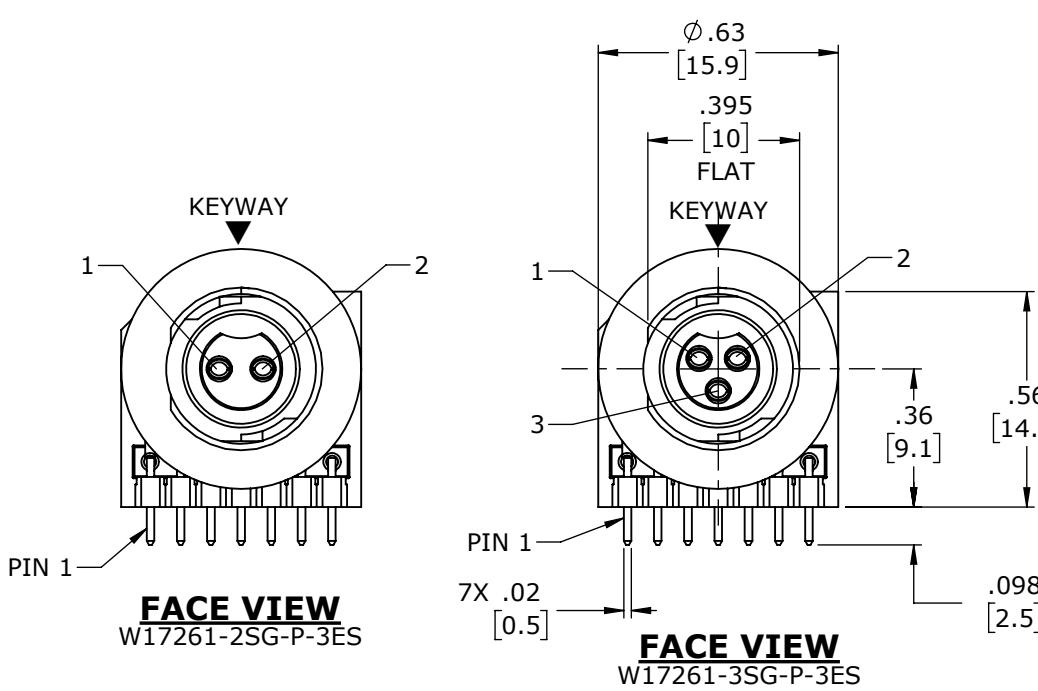

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY





DIMENSIONS IN BRACKET [] ARE METRIC.

RoHS COMPLIANT

► = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

FILE: W17261-XSG-P-3ES DIRECTORY: SLW

PART NUMBER: W17261-XSG-P-3ES REV A

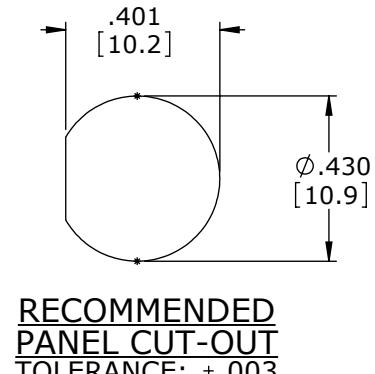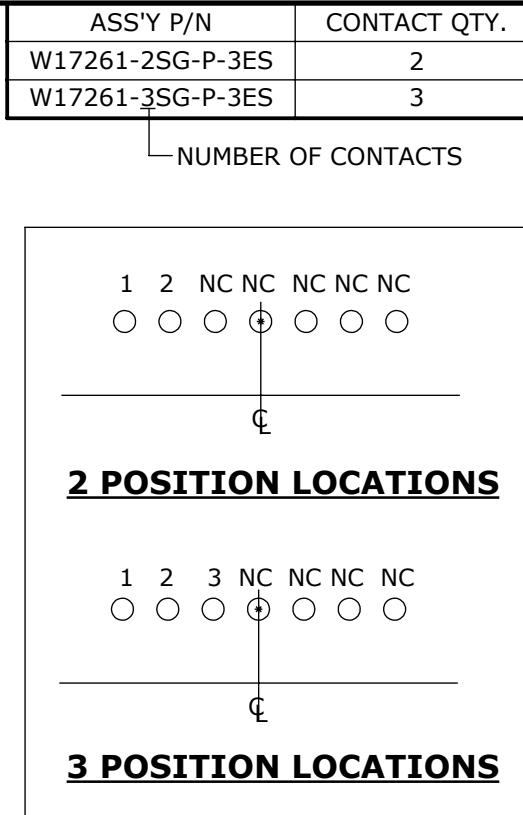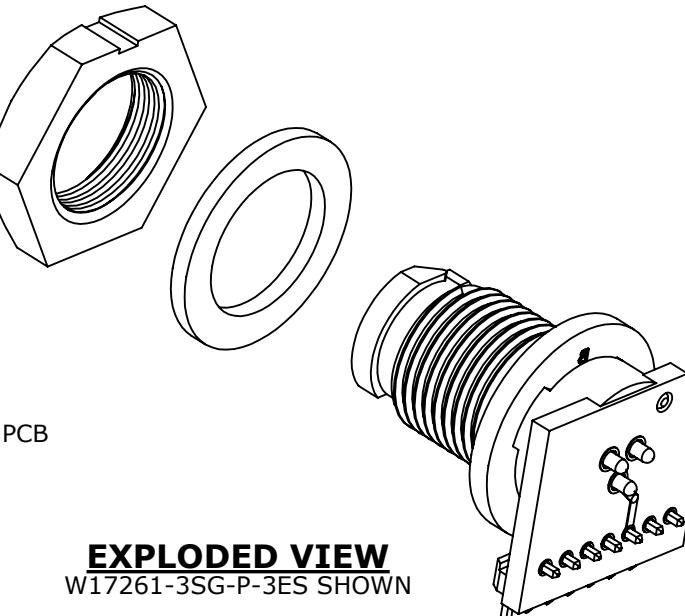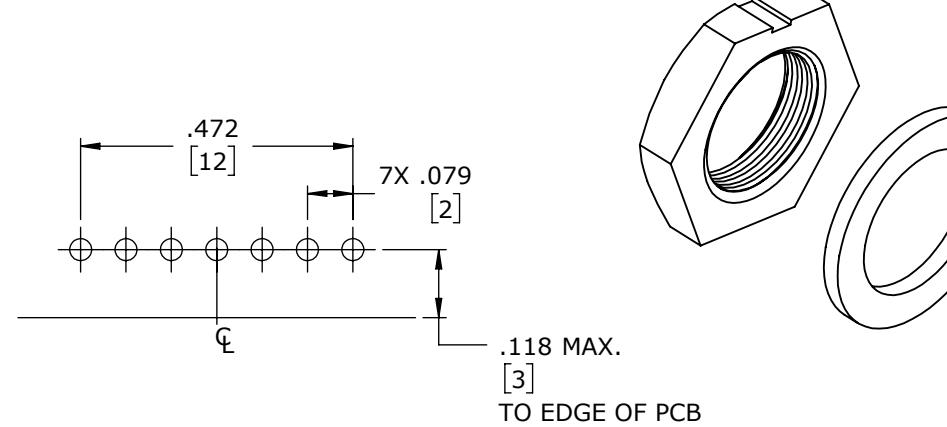

CUSTOMER APPROVAL		
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT / INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.		
APPROVED BY:	DATE:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.		

A	AN	11-17-25	DRAWING RELEASED PER PDR P-21001-5
	JWM	08-29-25	INITIAL RELEASE PER 21001
REV.	INIT.	DATE	DESCRIPTION
ORIG. DRAWN BY: DATE: AB 09-22-21			CHECKED BY:
APPROVED BY:			TITLE: PANEL CONNECTOR ASSEMBLY (2-3) #20 SKT CONTACTS INSTA CLICK™ MICRO-CON-X
SCALE NTS	SIZE B	SHEET 1 OF 1	CUSTOMER: STANDARD PRODUCT