



- NOTES:
1. PANEL CONNECTORS TO BE PACKED IN PARTITIONED BOX, 100 PC PER BOX.
 2. ALL HOLES REQUIRED REGARDLESS OF NUMBER OF POSITIONS OF CONNECTOR.
 3. HEX NUT AND GASKET SHIPPED UNASSEMBLED
 4. HEX NUT TIGHTENING TORQUE: 9 IN./LB MAX.
 5. CURRENT RATING: 5.0 AMP
 6. TEMPERATURE RATING: -40°C TO +85°C (-40°F TO +185°F)
 7. MATERIALS:
PANEL CONNECTOR, HEX NUT, SPACER: UV PBT
GASKET: RUBBER
CONTACTS: COPPER ALLOY, GOLD PLATED
PCB: FR-4
HEADER INSULATOR: THERMOPLASTIC, UL94V-0
 8. REAR WELL OF PANEL CONNECTOR TO BE FILLED WITH EPOXY.
 9. SEE DRAWING HPMCSTD FOR HOLE PATTERN.
 10. ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS TOLERANCE SPECIFIED.

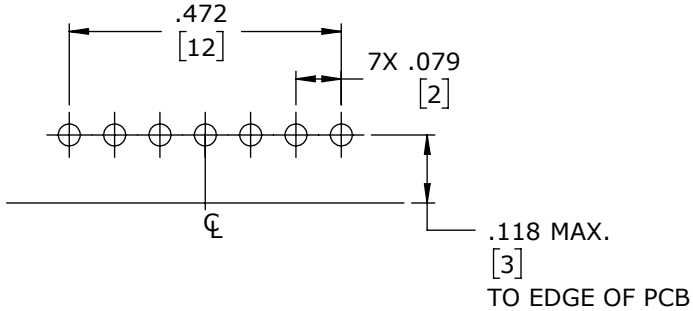

RECOMMENDED PCB LAYOUT
PCB COMPONENT SIDE
NOTE 2

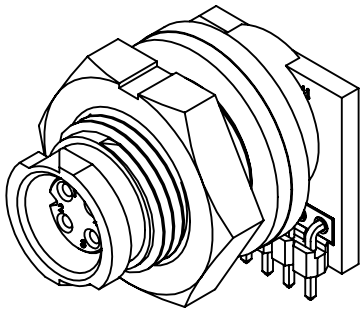


SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY




ASS'Y P/N	CONTACT QTY.
W17861-4SG-P-3ES	4




4 POSITION LOCATIONS

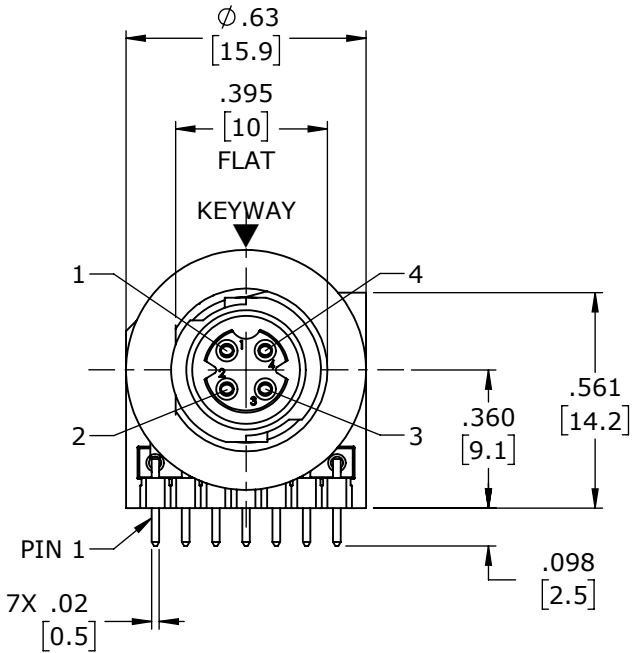


FACE VIEW

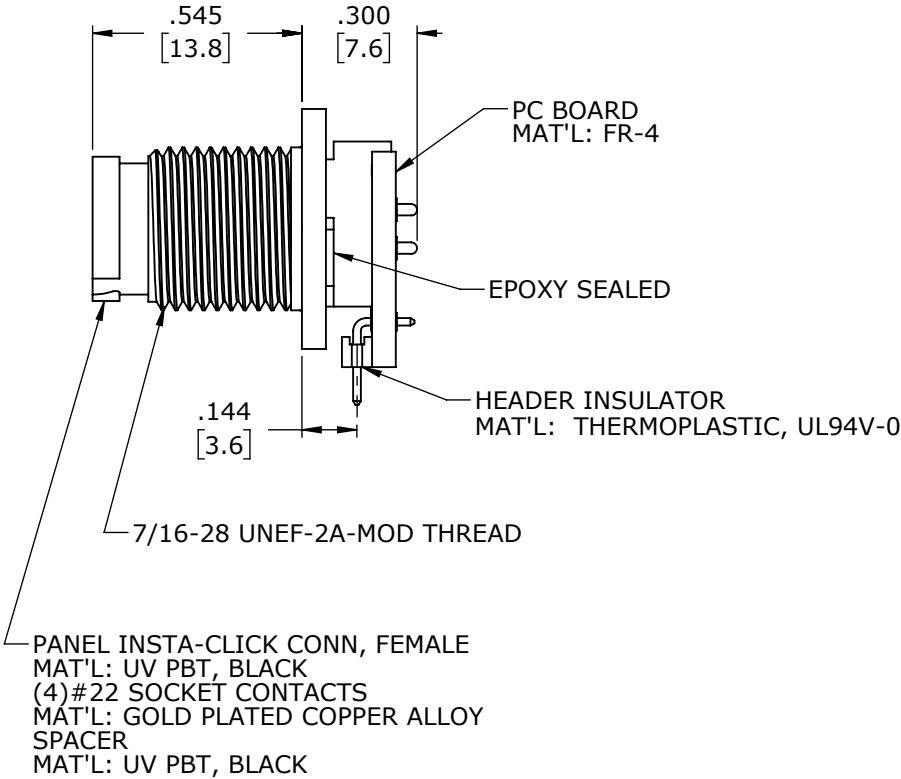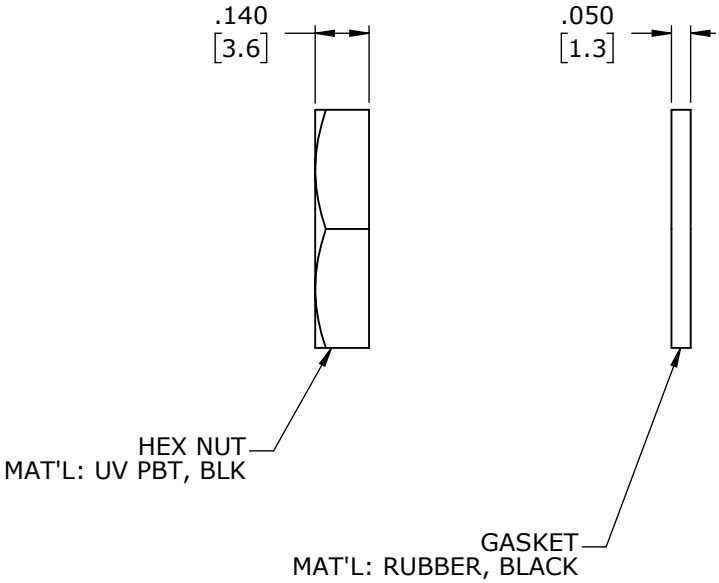

RECOMMENDED
PANEL CUT-OUT
TOLERANCE: ±.003

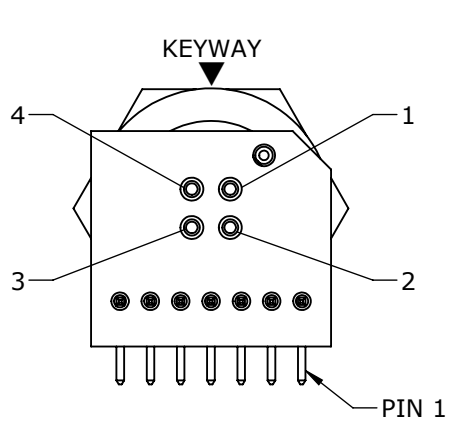

WIRE VIEW

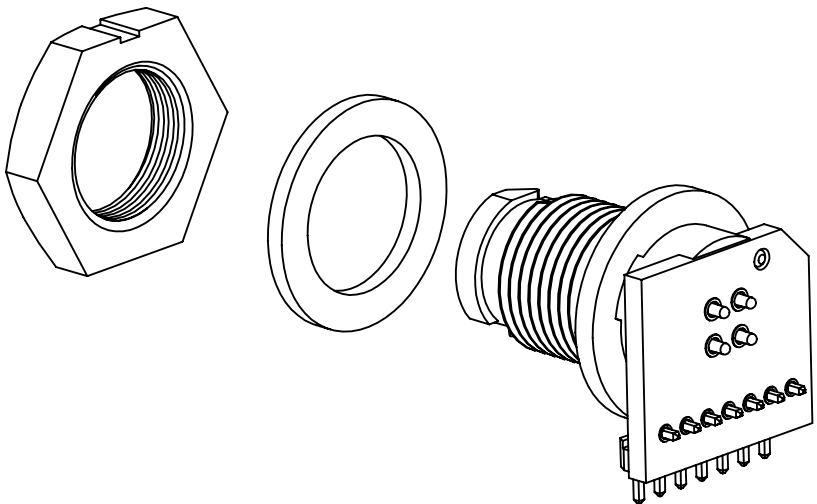

DIMENSIONS IN BRACKET [] ARE METRIC.

CUSTOMER APPROVAL			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.			
APPROVED BY: _____			
DATE: _____			

A	AN	11-13-25	DRAWING RELEASED PER PDR P-21001-5	
	JWM	08-29-25	INITIAL RELEASE PER 21001	
REV.	INIT.	DATE	DESCRIPTION	
AB		09-22-21	ORIG. DRAWN BY: DATE: 09-22-21	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			CHECKED BY:	
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			APPROVED BY:	
FILE: W17861-4SG-P-3ES			TITLE: PANEL CONNECTOR ASSEMBLY (4) #22 SKT CONTACTS INSTA CLICK™ MICRO-CON-X STANDARD PRODUCT	
DIRECTORY: SLW			CUSTOMER: W17861-4SG-P-3ES	
SHEET 1 OF 1			REV A	

RoHS COMPLIANT