

## NOTES: CUSTOMER PRINT W3182-XPG-P-4XX 1.099 27.9

**SHOWN ASSEMBLED** 

FOR CUSTOMER REFERENCE ONLY

## **CONNECTOR P/N GROMMET I.D. / CABLE O.D. RANGE CONTACTS** W3182-2PG-P-440 0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2] W3182-2PG-P-450 0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7] 2 #12 1. ALL PARTS ARE BULK PACKED 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO W3182-2PG-P-457 0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5] GROOVE OF CABLE CLAMP W3182-3PG-P-440 0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2] 3. CONTACTS ASSEMBLED INTO CONNECTOR 4. ALL DIMENSIONS ARE REFERENCE W3182-3PG-P-450 0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7] 3 #12 **EXCEPT THOSE WITH A TOLERANCE**

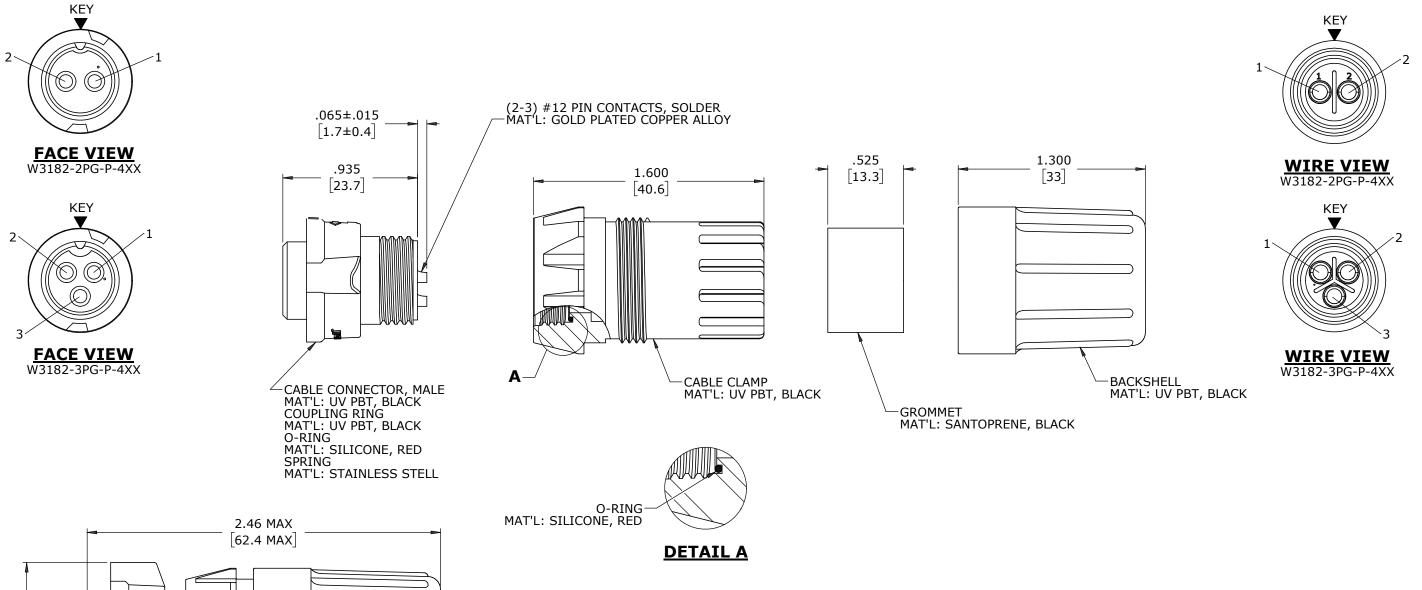

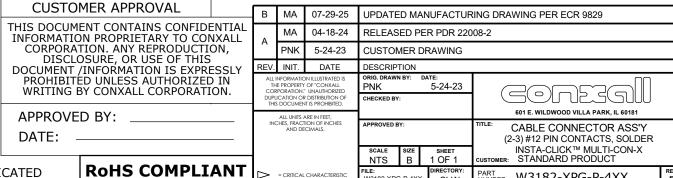

W3182-3PG-P-457

0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]

FILE: W3182-XPG-P-4XX PART NUMBER: W3182-XPG-P-4XX

DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS UNLESS INDICATED