






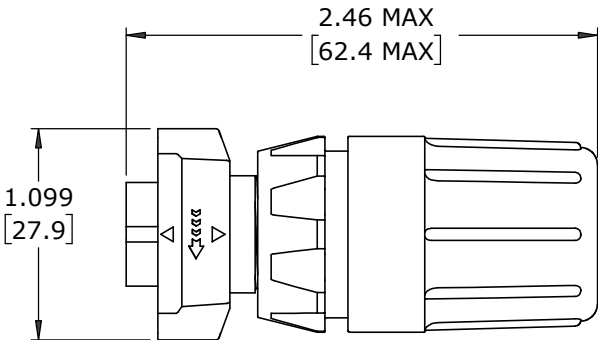
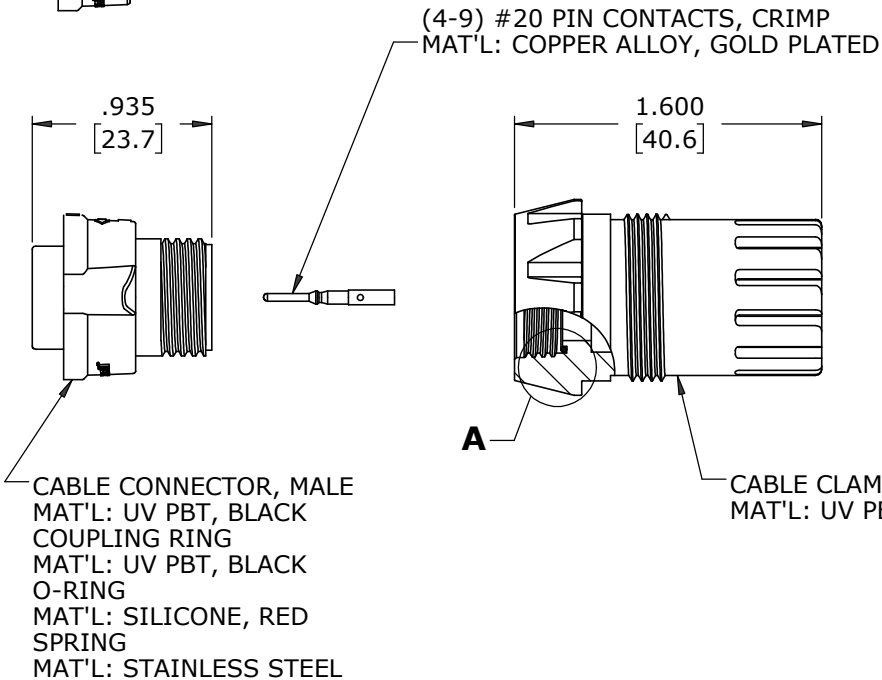

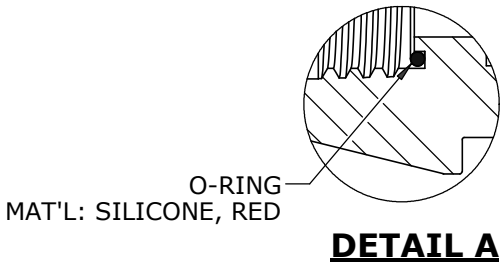
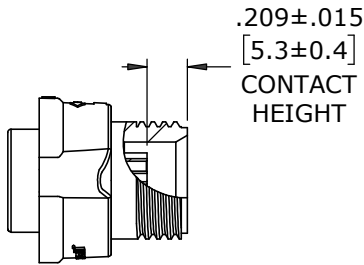






- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 3. CONTACTS SHIPPED UNASSEMBLED
 4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE



ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W3280-4PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
W3280-5PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
W3280-6PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
W3280-6PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-6PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-7PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	7 #20
W3280-7PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-7PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-8PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	8 #20
W3280-8PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-8PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-9PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	9 #20
W3280-9PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-9PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	



CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY: _____	DATE: _____

B	MA	07-30-25	UPDATED MANUFACTURING DRAWING PER ECR 9829	
A	MA	03-27-24	RELEASED PER PDR 22008-3	
	PNK	07-11-23	PRR# P-22008-3	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 07-11-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
APPROVED BY:			APPROVED BY:	
SCALE NTS			SIZE B	
FILE: W3280-XPG-P-4XX			SHEET 1 OF 1 DIRECTORY: SLW	
TITLE: CABLE CONNECTOR ASS'Y (4-9) #20 PIN CONTACTS, CRIMP INSTA-CLICK™ MULTI-CON-X STANDARD PRODUCT				CUSTOMER:
PART NUMBER: W3280-XPG-P-4XX				REV B

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX