


CUSTOMER PRINT


PART NUMBER: W3280-XSG-P-4XX

REV. B


- NOTES:
1. ALL PARTS TO BE BULK PACKED.
 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
 2. CONTACTS SHIPPED UNASSEMBLED
 3. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE




FACE VIEW
W3280-9SG-P-4XX

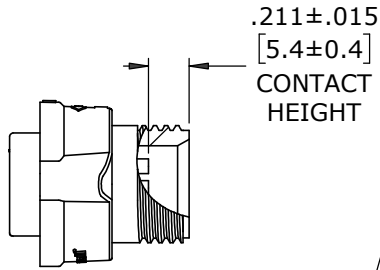

O-RING
MAT'L: SILICONE, RED




DETAIL A




CABLE CONNECTOR, MALE
MAT'L: UV PBT, BLACK
COUPLING RING
MAT'L: UV PBT, BLACK
O-RING
MAT'L: SILICONE, RED
SPRING
MAT'L: STAINLESS STEEL


(4-9) #20 PIN CONTACTS, CRIMP
MAT'L: COPPER ALLOY, GOLD PLATED




CABLE CLAMP
MAT'L: UV PBT, BLACK




GROMMET
MAT'L: SANTOPRENE, BLACK




BACKSHELL
MAT'L: UV PBT, BLACK




FACE VIEW
W3280-4SG-P-4XX




FACE VIEW
W3280-5SG-P-4XX

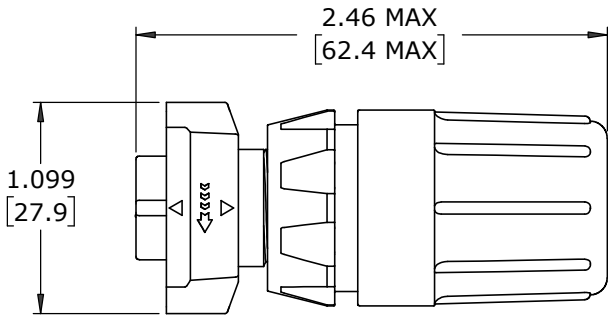


SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY



FACE VIEW
W3280-6SG-P-4XX




FACE VIEW
W3280-7SG-P-4XX




FACE VIEW
W3280-8SG-P-4XX


ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W3280-4SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
W3280-5SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
W3280-6SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
W3280-6SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-6SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-7SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	7 #20
W3280-7SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-7SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-8SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	8 #20
W3280-8SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-8SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3280-9SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	9 #20
W3280-9SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3280-9SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	




WIRE VIEW
W3280-4SG-P-4XX




WIRE VIEW
W3280-5SG-P-4XX




WIRE VIEW
W3280-6SG-P-4XX



WIRE VIEW
W3280-7SG-P-4XX



WIRE VIEW
W3280-8SG-P-4XX



WIRE VIEW
W3280-9SG-P-4XX

CUSTOMER APPROVAL				REV. B			
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.				B	MA	07-30-25	UPDATED MANUFACTURING DRAWING PER ECR 9829
				A	MA	03-27-24	RELEASED PER PDR 22008-3
					PNK	07-11-23	PRR# P-22008-3
				REV.	INIT.	DATE	DESCRIPTION
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.				ORIG. DRAWN BY: PNK		DATE: 07-11-23	 601 E. WILDWOOD VILLA PARK, IL 60181
				CHECKED BY:			
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.				APPROVED BY:			TITLE: CABLE CONNECTOR ASS'Y (4-9) #20 SOCKET CONTACTS, CRIMP INSTA CLICK™ MULTI-CON-X STANDARD PRODUCT
				SCALE: NTS		SHEET: 1 OF 1	
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX				FILE:	W3280-XSG-P-4XX	DIRECTORY:	PART NUMBER: W3280-XSG-P-4XX
						SLW	REV B

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT