







CUSTOMER PRINT







PART NUMBER: W3282-XPG-P-4XX

NOTES:

1. ALL PARTS TO BE BULK PACKED.
2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
3. CONTACTS ASSEMBLED INTO CONNECTOR
4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE

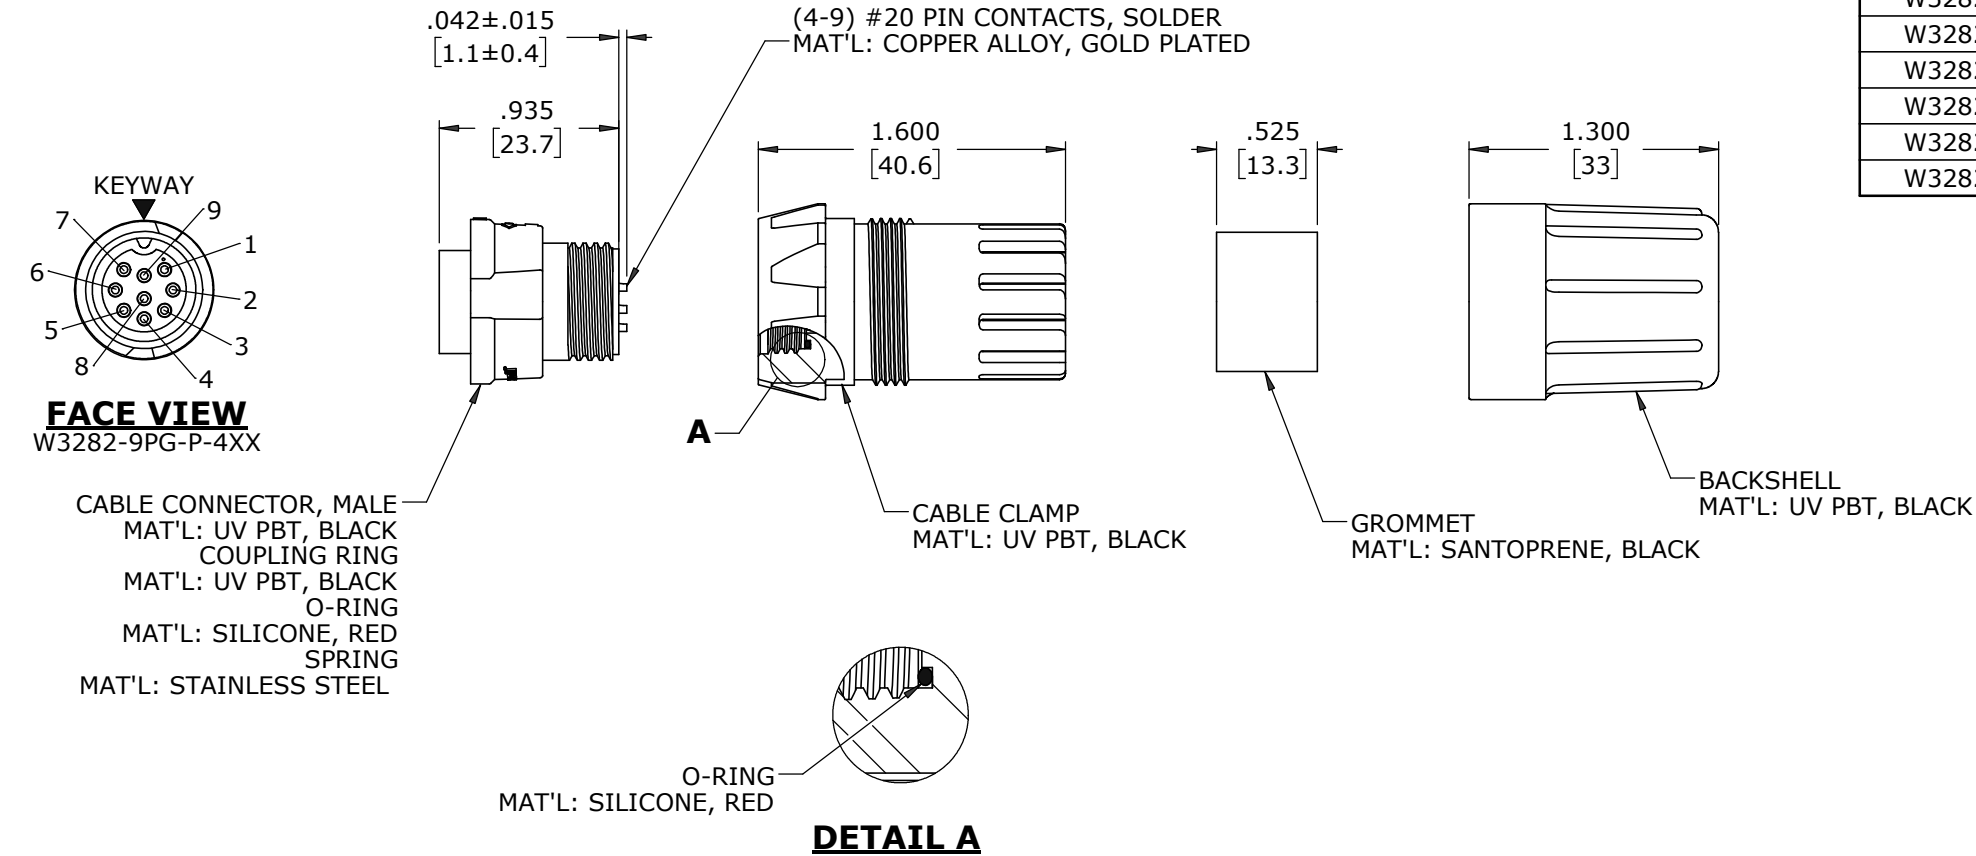

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W3282-4PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
W3282-5PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
W3282-6PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
W3282-6PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-6PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-7PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	7 #20
W3282-7PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-7PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-8PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	8 #20
W3282-8PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-8PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-9PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	9 #20
W3282-9PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-9PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	



SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

CUSTOMER APPROVAL										UPDATED MANUFACTURING DRAWING PER ECR 9829									
B	MA		07-30-25		RELEASED PER PDR 22008-3														
	A	MA		03-28-24		PRR# P-22008-3													
PNK		07-11-23																	
REV.		INIT.		DATE		DESCRIPTION													
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.						ORIG. DRAWN BY: PNK				DATE: 07-11-23				 601 E. WILDWOOD VILLA PARK, IL 60181					
						CHECKED BY:													
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.						APPROVED BY:				TITLE: CABLE CONNECTOR ASS'Y (4-9) #20 PIN CONTACTS, SOLDER INSTA-CLICK™ MULTI-CON-X STANDARD PRODUCT									
						SCALE NTS		SIZE B		SHEET 1 OF 1		CUSTOMER: STANDARD PRODUCT							
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX						FILE: W3282-XPG-P-4XX				DIRECTORY: SLW				PART NUMBER: W3282-XPG-P-4XX		REV B			

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

METRIC

RoHS COMPLIANT

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX