


CUSTOMER PRINT

PART NUMBER: W3282-XSG-P-4XX

NOTES:




1. ALL PARTS TO BE BULK PACKED.
2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
3. CONTACTS ASSEMBLED INTO CONNECTOR
4. DIMENSIONS ARE REFERENCE ONLY EXCEPT THOSE WITH A TOLERANCE

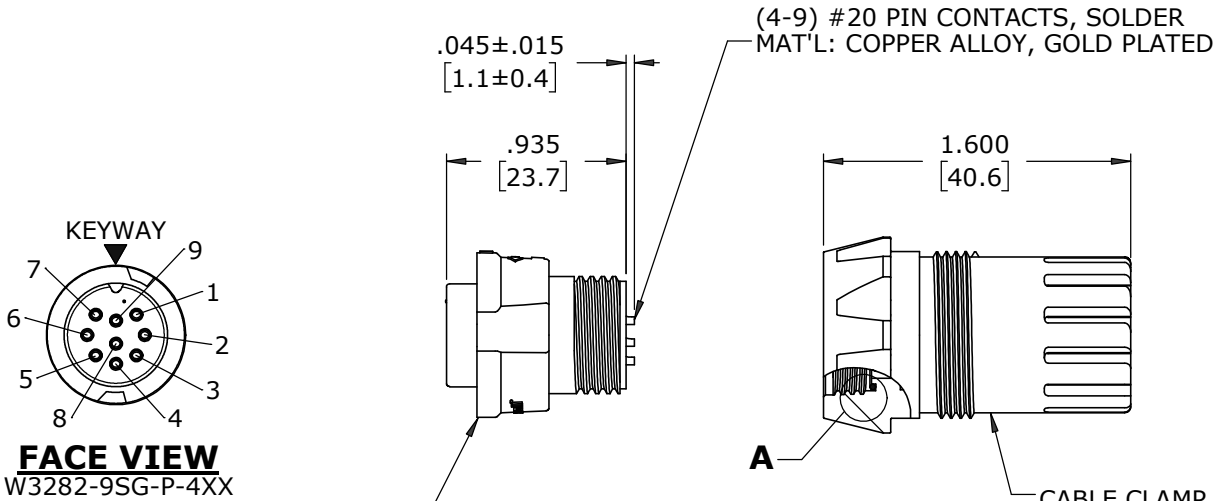

CABLE CONNECTOR, MALE
MAT'L: UV PBT, BLACK
COUPLING RING
MAT'L: UV PBT, BLACK
O-RING
MAT'L: SILICONE, RED
SPRING
MAT'L: STAINLESS STEEL












O-RING
MAT'L: SILICONE, RED

DETAIL A

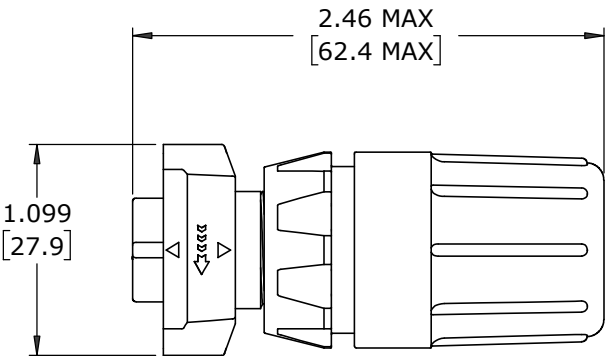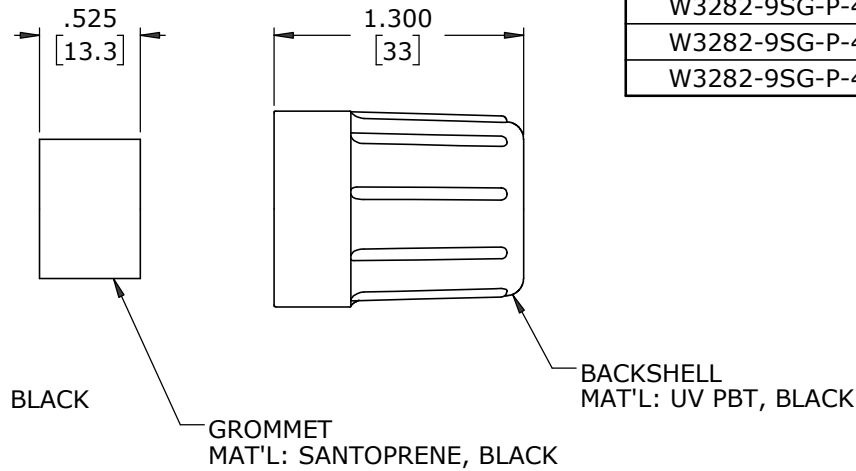

SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

ASSEMBLY P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W3282-4SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #20
W3282-5SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	5 #20
W3282-6SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	6 #20
W3282-6SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-6SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-7SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	7 #20
W3282-7SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-7SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-8SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	8 #20
W3282-8SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-8SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	
W3282-9SG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	9 #20
W3282-9SG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3282-9SG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	



CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY: _____	DATE: _____

B	MA	07-30-25	UPDATED MANUFACTURING DRAWING PER ECR 9829
	MA	03-28-24	RELEASED PER PDR 22008-3
A	PNK	07-11-23	PRR# P-22008-3
REV.	INIT.	DATE	DESCRIPTION
			ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.
			ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.
			ORIG. DRAWN BY: PNK DATE: 07-11-23
			CHECKED BY:
			APPROVED BY:
			SCALE NTS SIZE B SHEET 1 OF 1
			FILE: W3282-XSG-P-4XX DIRECTORY: SLW
			TITLE: CABLE CONNECTOR ASS'Y (4-9) #20 SOCKET CONTACTS, SOLDER INSTA-CLICK™ MULTI-CON-X STANDARD PRODUCT
			CUSTOMER: PART NUMBER: W3282-XSG-P-4XX
			REV B

DIMENSIONS IN BRACKETS [] ARE METRIC

RoHS COMPLIANT

➤ = CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX