
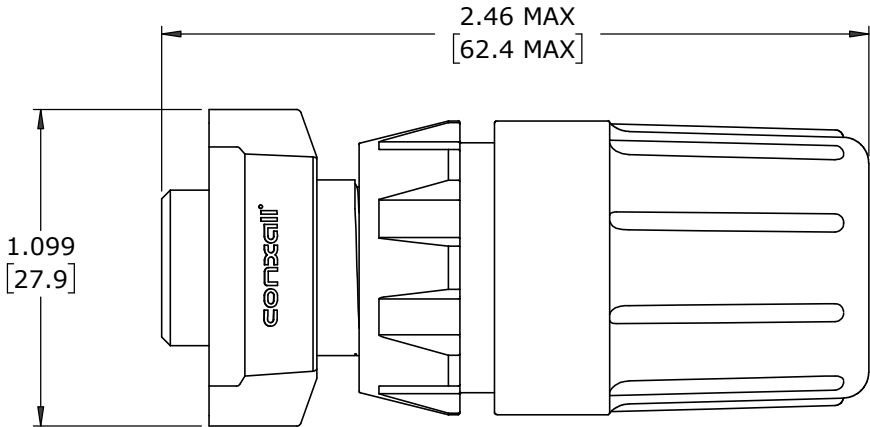


NOTES:

- 1. ALL PARTS ARE BULK PACKED
- 2. RED SILICONE O-RING IS LUBRICATED AND INSTALLED INTO GROOVE OF CABLE CLAMP
- 3. CONTACTS SHIPPED UNASSEMBLED
- 4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

CONNECTOR P/N	GROMMET I.D. / CABLE O.D. RANGE	CONTACTS
W3380-4PG-P-440	0.400 [10.2] / 0.320 - 0.400 [8.1 - 10.2]	4 #16
W3380-4PG-P-450	0.500 [12.7] / 0.400 - 0.500 [10.2 - 12.7]	
W3380-4PG-P-457	0.570 [14.5] / 0.500 - 0.570 [12.7 - 14.5]	

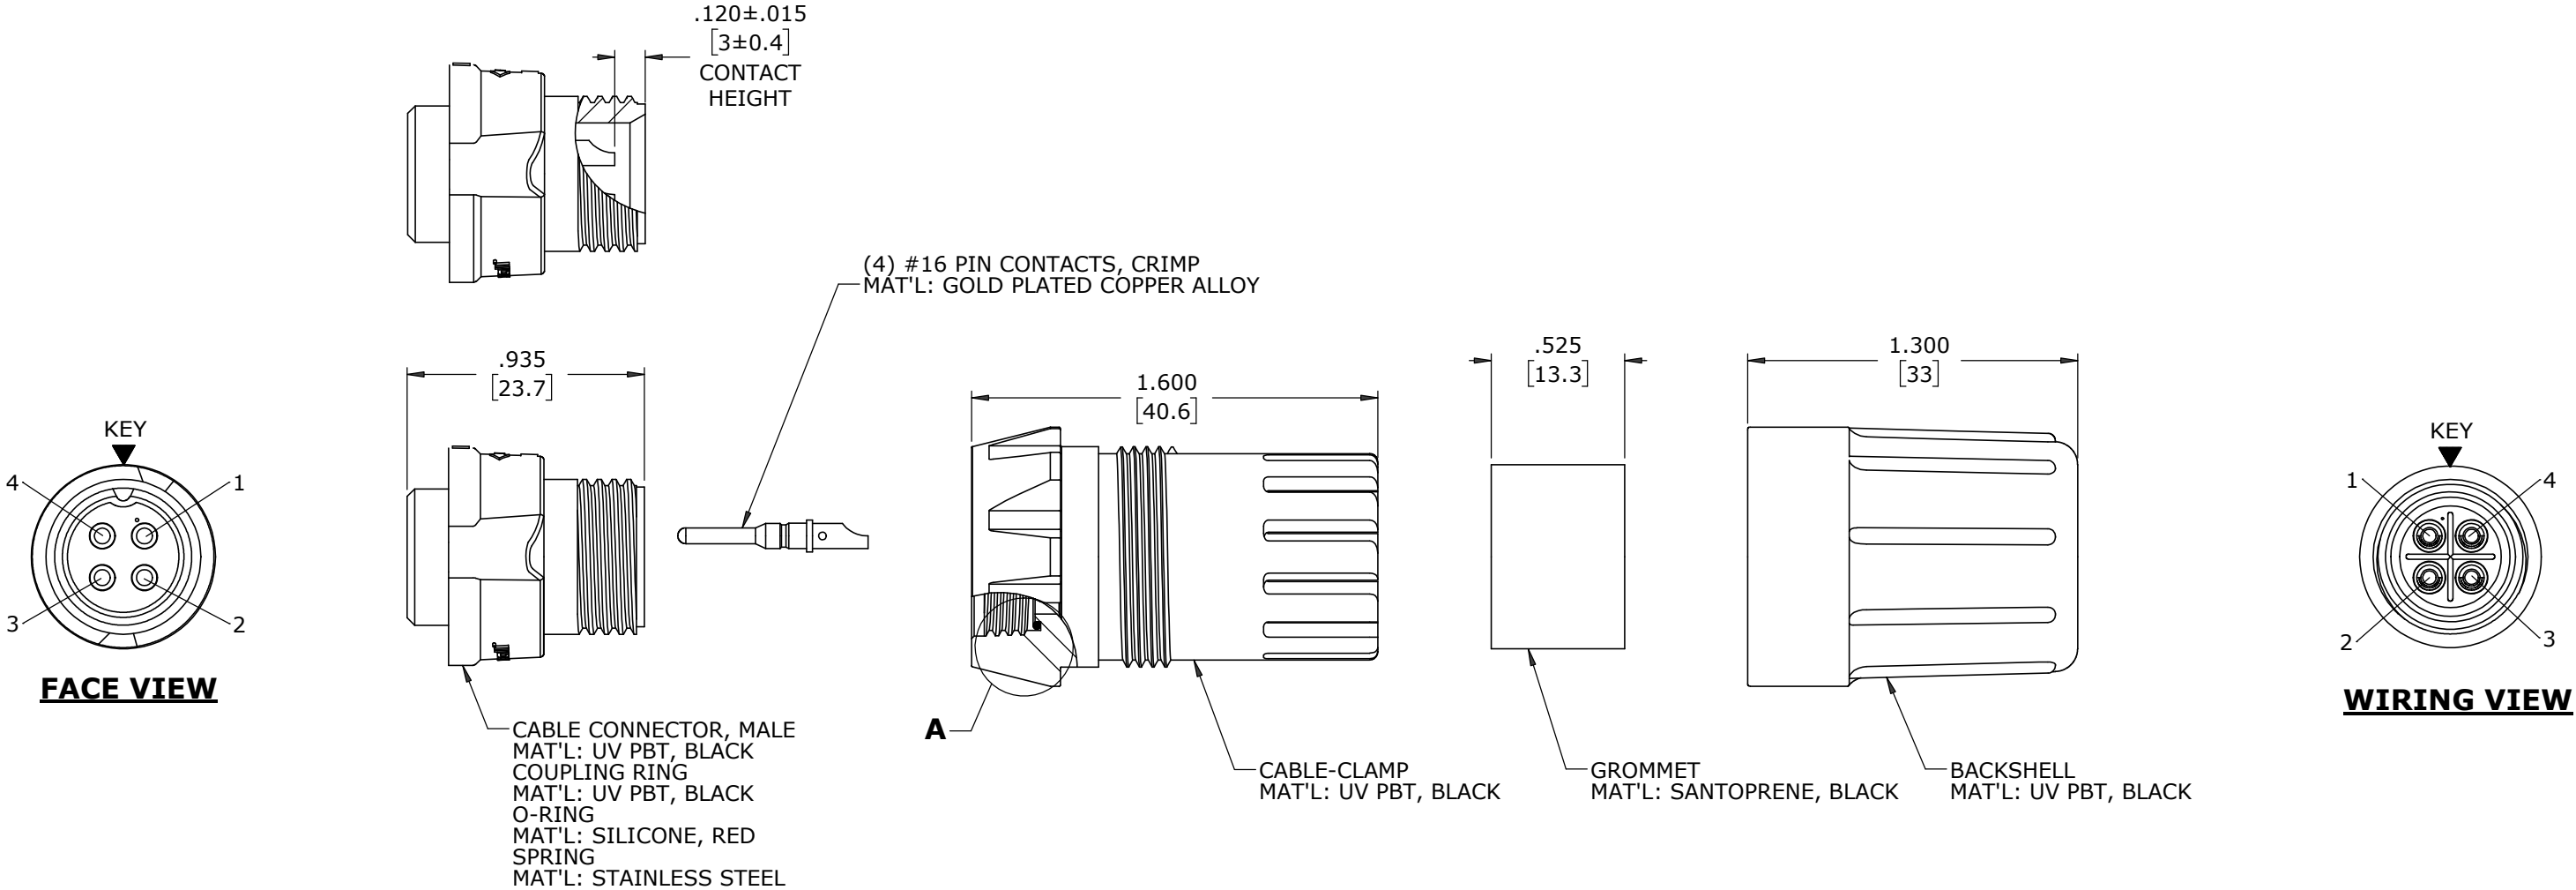


SHOWN ASSEMBLED
FOR CUSTOMER REFERENCE ONLY

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

RoHS COMPLIANT

CUSTOMER APPROVAL	
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.	
APPROVED BY: _____	DATE: _____

B	MA	07-31-25	UPDATED MANUFACTURING DRAWING PER ECR 9829	
A	MA	04-18-24	RELEASED PER PDR 22008-2	
	PNK	7-28-23	CUSTOMER DRAWING	
REV.	INIT.	DATE	DESCRIPTION	
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION." UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			ORIG. DRAWN BY: PNK	DATE: 7-28-23
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			CHECKED BY:	 601 E. WILDWOOD VILLA PARK, IL 60181
			APPROVED BY:	
			SCALE: NTS SIZE: B SHEET: 1 OF 1	
FILE: W3380-4PG-P-4XX			DIRECTORY: SLW	TITLE: CABLE CONNECTOR ASS'Y (4) #16 PIN CONTACTS, CRIMP INSTA-CLICK™ MULTI-CON-X STANDARD PRODUCT
= CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX			PART NUMBER: W3380-4PG-P-4XX	REV B